

NOTES
■ FOR COMPLETE DESIGN AND PRODUCT INFORMATION CONTACT JENSEN PRECAST.

BILL OF MATERIALS


ITEM	UNIT QTY	QTY	PART NUMBER	DESCRIPTION
1	8.414 ft^3	8.414 ft^3	100011425	CONCRETE MIX GENERIC 5000 PSI
2	1	1	100027180	FRAME FA-8557-R1 CONTRA COSTA TYPE A
3	1	4	100002854	INSERT MH RUNG PLASTIC SP SOCKET
4	1	1	300129563	REINFORCING MAT 300129563

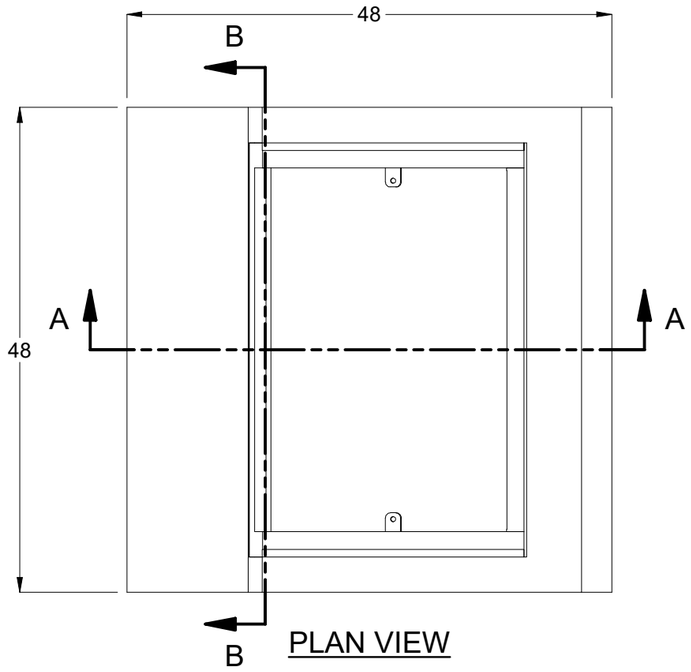


PLAN VIEW

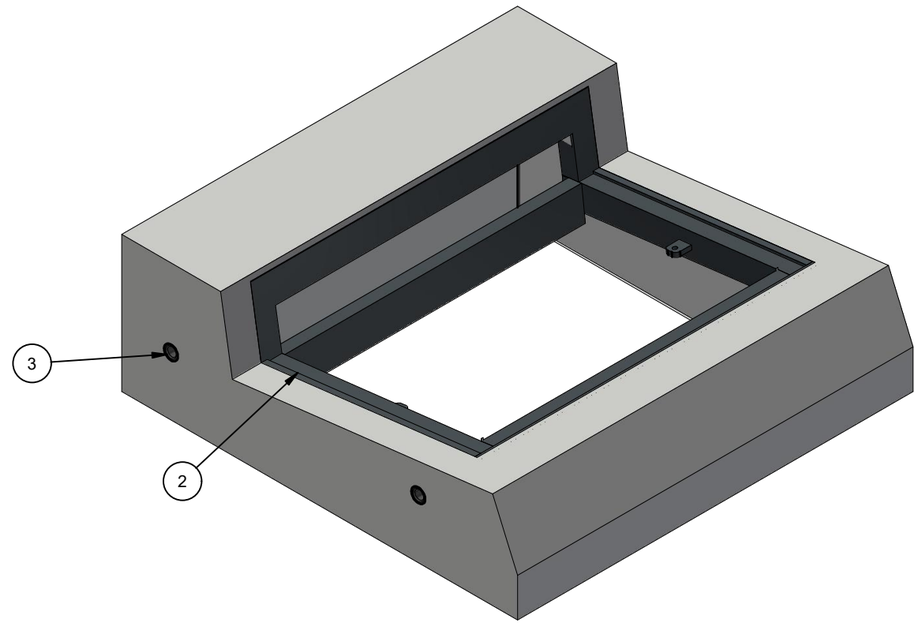

ISOMETRIC VIEW

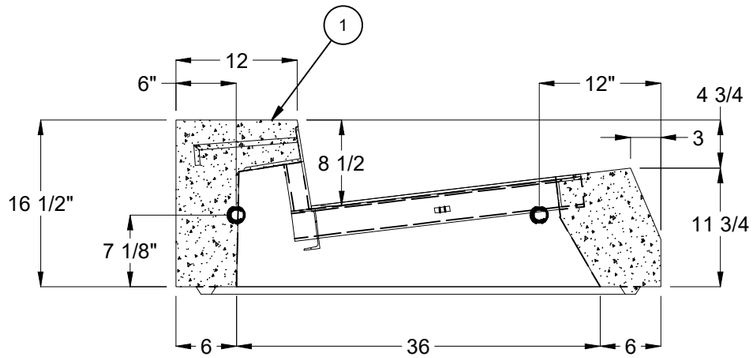

SECTION A-A

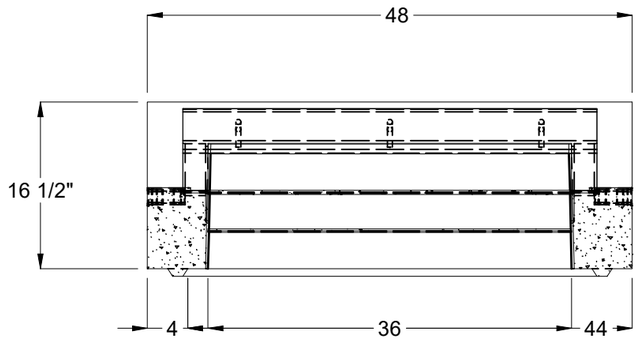

SECTION B-B

LIFTING NOTES
■ THIS CONCRETE PRODUCT IS DESIGNED TO BE LIFTED AT XXXXPSI WITH XX LIFT CONNECTIONS EQUALLY LOADED TO XX LIFTING POINTS AT A MINIMUM XX° SLING ANGLE, MEASURED FROM HORIZONTAL.

CHANGE HISTORY			
NO.	DESCRIPTION	DATE	BY
1			
2			
3			

BURY DEPTH:	0.0' - 0.0' to Top		
WATER LEVEL:	Below Structure	APPROX. WEIGHT:	1344.73 Lbs
DESIGN SPEC:	ASTM C890,ACI 318	LOADING SPEC:	A-16 (AASHTO HS20-44)
REINFORCEMENT TYPE:	Rebar	LIFTING TYPE:	Insert

JENSEN PRECAST EST. 1968

WWW.JENSENPRECAST.COM

©2022 Jensen Precast- All rights reserved.
All materials appearing as Jensen Precast documents and the like are proprietary work product and are protected under U.S. copyright and other laws.
Unless in conjunction with business conducted with Jensen Precast, any use of Jensen Precast work product without express, written consent is prohibited, and recipient is prohibited from distributing any and all work product to non-approved third parties under penalty of civil action.

DESCRIPTION:
Curb Inlet 3636x11.75 Rect. Top Section 36"x36"C Contra Costa County CD20
CASTING LAYOUT

REV: A-1

PART NUMBER:	100006978	DRAWN BY:	A. Sprung
CREATED:	10/26/2016	MODIFIED:	2/14/2022

SHEET: 1 OF 1

100006978.idw