DESIGN NOTES:

- CONCRETE SHALL HAVE A 28 DAY MINIMUM COMPRESSIVE STRENGTH OF 4500 PSI
- SOIL UNIT WEIGHT DRY - 110 lbs/cu.ft.
- EQUIVALENT LATERAL PRESSURE DRY - 40 lbs/cu.ft.
- SOIL UNIT WEIGHT WET - 120 lbs/cu.ft.
- EQUIVALENT LATERAL PRESSURE WET - 80 lbs/cu.ft.

PRODUCTION NOTES:

- THIS PRODUCT SHALL ONLY BE PRODUCED IN A JENSEN INFRASTRUCTURE FACILITY
- LIFTING INSERTS SHALL BE INSTALLED PER MANUFACTURER'S REQUIREMENTS
- APPLIED FINISH - NONE
- INTERNAL LINER/COATING -
- EXTERNAL LINER/COATING -

BILL OF MATERIALS

ITEM	QTY	PART NUMBER	DESCRIPTION
1	0.583 ft^3	100005976	CONCRETE MIX GENERIC 4500 PSI
2	1	100006796	REINF HOOP STEEL .25235DIA GA 29DIA

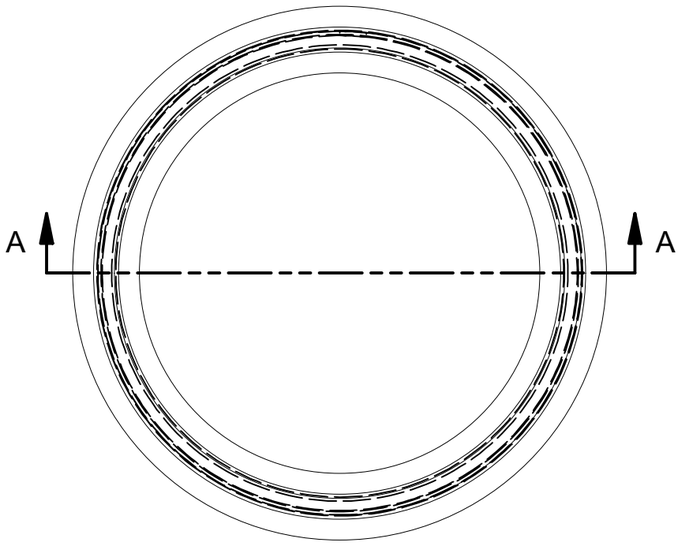

PLAN VIEW

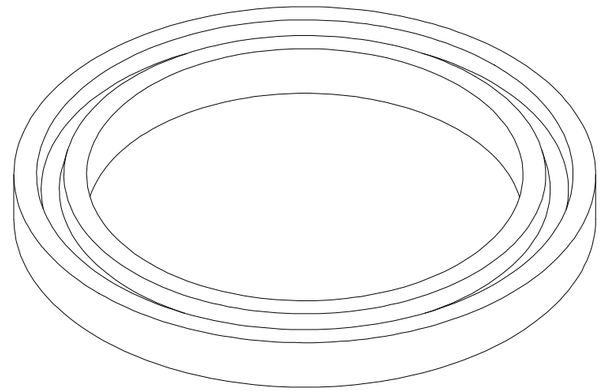

ISO VIEW

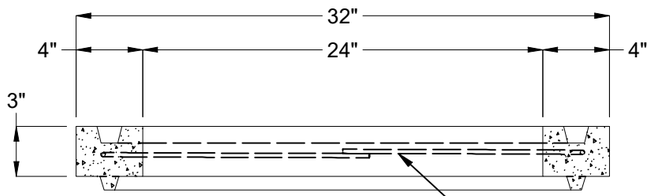

SECTION A-A

CHANGE HISTORY

NO.	DESCRIPTION	DATE	BY
A	DRAWING CREATED	7/23/2020	T.Larson

BURY DEPTH:	0.0' - 50.0' to Top		
WATER LEVEL:	0.0'	APPROX. WEIGHT:	88.97 Lbs
DESIGN SPEC:	ASTM C478,AASHTO M199	LOADING SPEC:	A-16 (AASHTO HS20-44)
REINFORCEMENT TYPE:	Plain Wire	LIFTING TYPE:	None

Infrastructure
JENSEN
WWW.JENSENINFRASTRUCTURE.COM

©2026 Jensen Infrastructure - All rights reserved.
All materials appearing as Jensen Infrastructure documents and the like are proprietary work product and are protected under U.S. copyright and other laws.
Unless in conjunction with business conducted with Jensen Infrastructure , any use of Jensen Infrastructure work product without express, written consent is prohibited, and recipient is prohibited from distributing any and all work product to non-approved third parties under penalty of civil action.
This product shall only be produced in a Jensen Infrastructure facility.

DESCRIPTION:	Grade Ring D2432x3 CASTING LAYOUT		REV: B-1
PART NUMBER:	100001524	DRAWN BY:	T.Larson
CREATED:	7/23/2020	MODIFIED:	8/7/2026
			SHEET: 1 OF 1

100001524.idw