DESIGN NOTES
■ FOR COMPLETE DESIGN AND PRODUCT INFORMATION CONTACT JENSEN PRECAST.
LIFTING NOTES
■ THIS CONCRETE PRODUCT IS DESIGNED TO BE LIFTED AT XXXXPSI WITH XX LIFT CONNECTIONS EQUALLY LOADED TO XX LIFTING POINTS AT A MINIMUM XX° SLING ANGLE, MEASURED FROM HORIZONTAL.

BILL OF MATERIALS

ITEM	UNIT QTY	QTY	PART NUMBER	DESCRIPTION
1	1.021 ft^3	1.021 ft^3	100011427	CONCRETE MIX GENERIC 6000 PSI
2	1	1	100006796	REINF HOOP STEEL .25235DIA GA 29DIA

100001528.idw

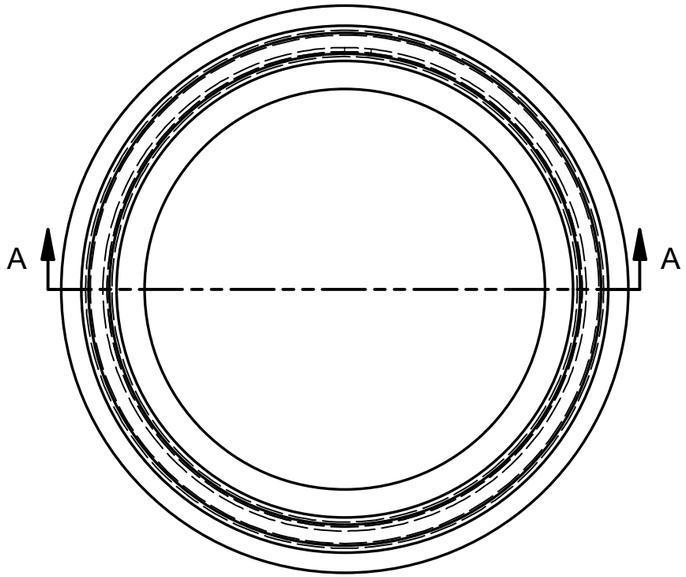

PLAN VIEW

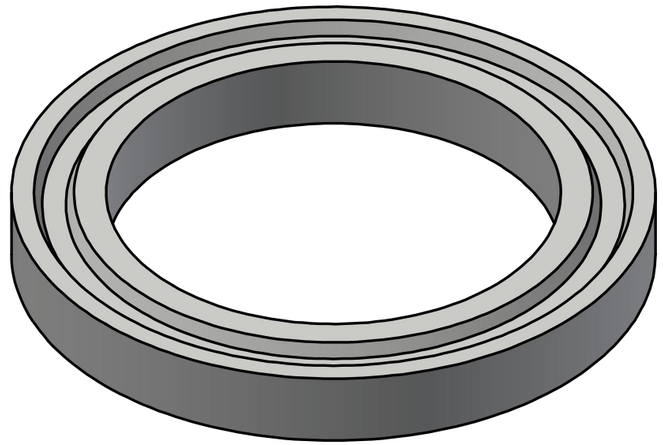

ISO VIEW

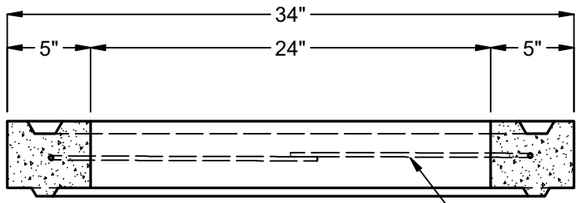

SECTION A-A

2 IN CENTER THIRD OF WALL

REVISION HISTORY			
REV	DESCRIPTION	DATE	BY
A	DRAWING CREATED	12/19/24	KS

BURY DEPTH:	0.0' - 50.0' to Top		
WATER LEVEL:	0.0'	WEIGHT:	154.77 Lbs
DESIGN SPEC:	AASHTO M199,ASTM C478	LOADING SPEC:	A-16 (AASHTO HS20-44)
REINFORCEMENT TYPE:	Plain Wire	LIFTING TYPE:	None

JENSEN PRECAST EST. 1968

WWW.JENSENPRECAST.COM

©2018 Jensen Precast- All rights reserved.
All materials appearing as Jensen Precast documents and the like are proprietary work product and are protected under U.S. copyright and other laws.
Unless in conjunction with business conducted with Jensen Precast, any use of Jensen Precast work product without express, written consent is prohibited, and recipient is prohibited from distributing any and all work product to non-approved third parties under penalty of civil action.

DESCRIPTION:	Grade Ring D2434x4 CASTING LAYOUT		REV: A-1
PART NUMBER:	100001528	DRAWN BY:	K. Steinhorst
CREATED:	12/18/2018	MODIFIED:	12/19/2024
			SHEET: 1 OF 1