DESIGN NOTES:


- CONCRETE SHALL HAVE A 28 DAY MINIMUM COMPRESSIVE STRENGTH OF 6000 PSI

PRODUCTION NOTES:


- THIS PRODUCT SHALL ONLY BE PRODUCED IN A JENSEN PRECAST FACILITY

BILL OF MATERIALS


ITEM	QTY	PART NUMBER	DESCRIPTION
1	40.425 ft^3	100011427	CONCRETE MIX GENERIC 6000 PSI
2	1	200106495	WWR REINFORCING CAGE 200106495

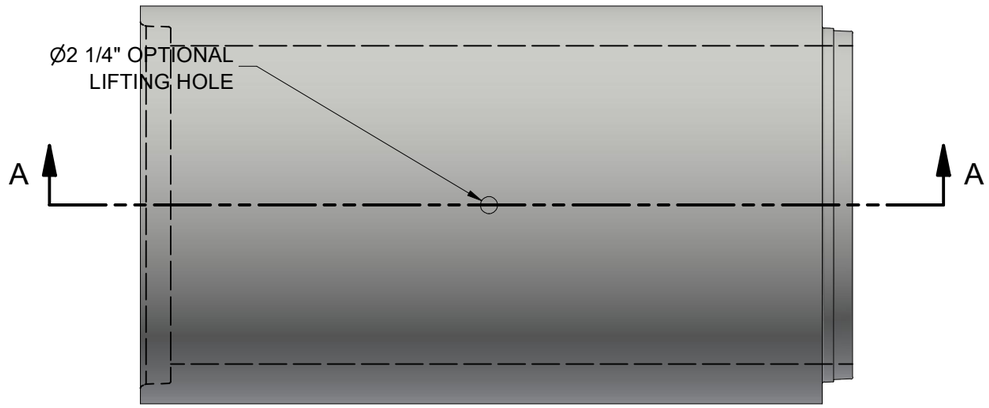


PLAN VIEW

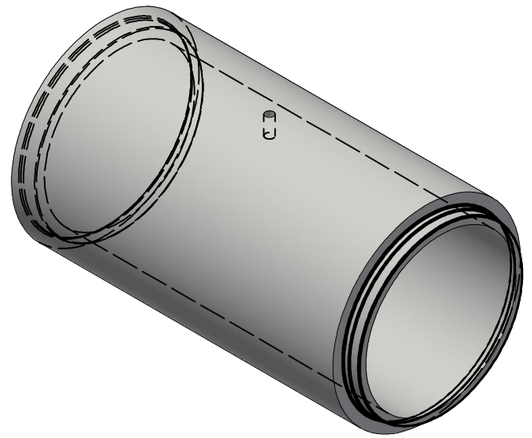


ISO REF

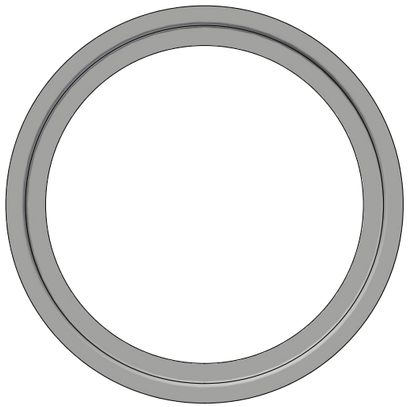

GROOVE END

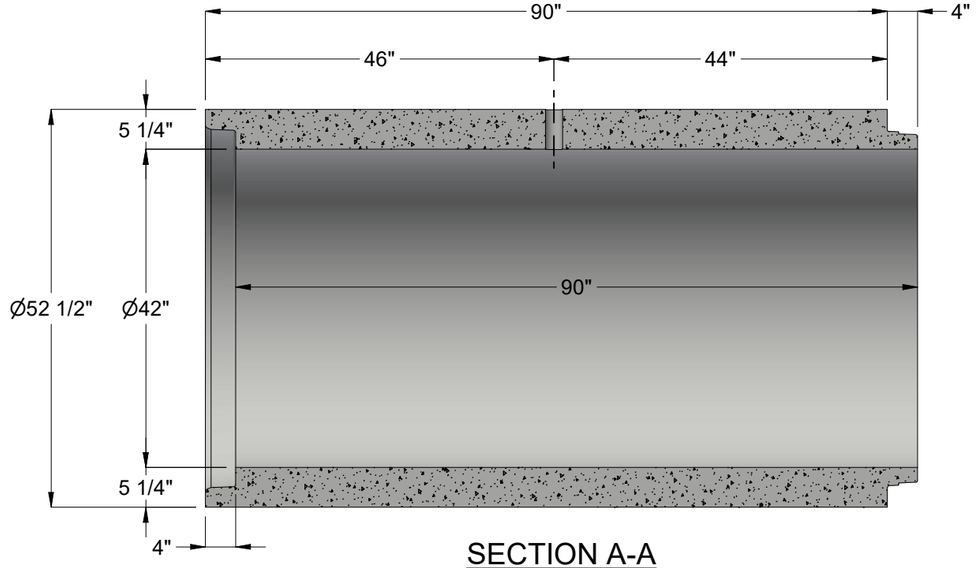

SECTION A-A

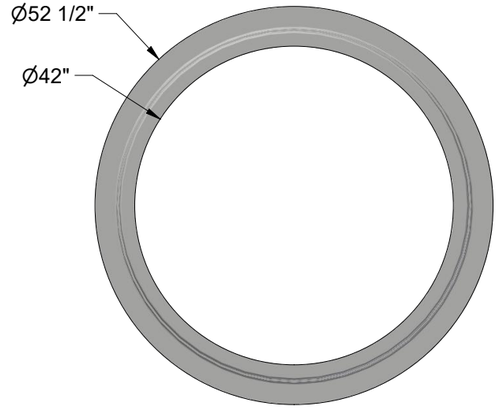

TONGUE END

100002146.idw

CHANGE HISTORY

NO.	DESCRIPTION	DATE	BY
1	2508-59511	09/10/2025	MGL

BURY DEPTH:	to		
WATER LEVEL:		APPROX. WEIGHT:	6075.15 Lbs
DESIGN SPEC:	ASTM C76/AASHTO M170	LOADING SPEC:	Class 5
REINFORCEMENT TYPE:	WWR Plain	LIFTING TYPE:	None

JENSEN PRECAST EST. 1968

WWW.JENSENPRECAST.COM

©2025 Jensen Precast- All rights reserved.
All materials appearing as Jensen Precast documents and the like are proprietary work product and are protected under U.S. copyright and other laws.
Unless in conjunction with business conducted with Jensen Precast, any use of Jensen Precast work product without express, written consent is prohibited, and recipient is prohibited from distributing any and all work product to non-approved third parties under penalty of civil action.

DESCRIPTION:	RCP P42C Class 5 Bell - Spigot 90L CASTING LAYOUT		
PART NUMBER:	100002146	DRAWN BY:	M. Lincoln
CREATED:	8/5/2024	MODIFIED:	9/10/2025
REV:	A-1	SHEET:	1 OF 1