DESIGN NOTES:

- CONCRETE SHALL HAVE A 28 DAY MINIMUM COMPRESSIVE STRENGTH OF 4500 PSI

PRODUCTION NOTES:

- LIFTING INSERTS SHALL BE INSTALLED PER MANUFACTURER'S REQUIREMENTS
- APPLIED FINISH - NONE
- INTERNAL LINER/COATING - NONE
- EXTERNAL LINER/COATING - NONE

BILL OF MATERIALS

ITEM	UNIT QTY	QTY	PART NUMBER	DESCRIPTION
1	1.582 ft^3	1.582 ft^3	100005976	CONCRETE MIX GENERIC 4500 PSI
2	1	1	100006796	REINF HOOP STEEL .25235DIA GA 29DIA

100004573.idw

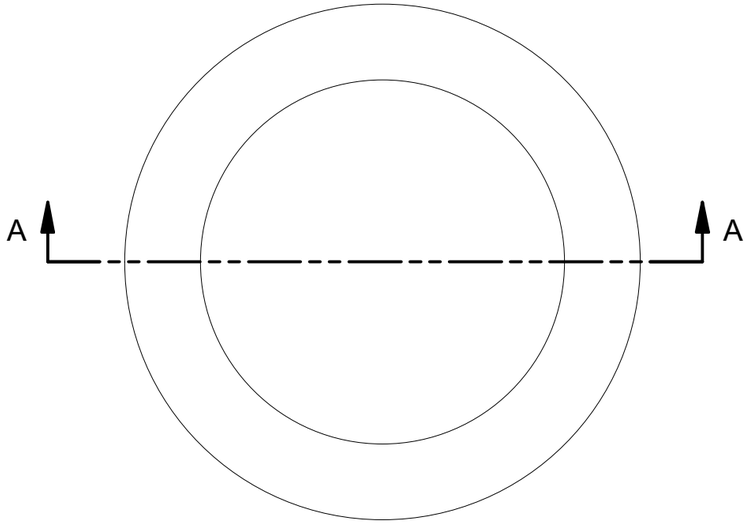

PLAN VIEW

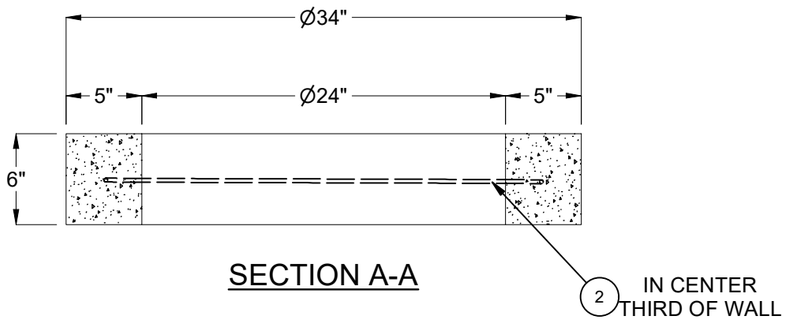

SECTION A-A

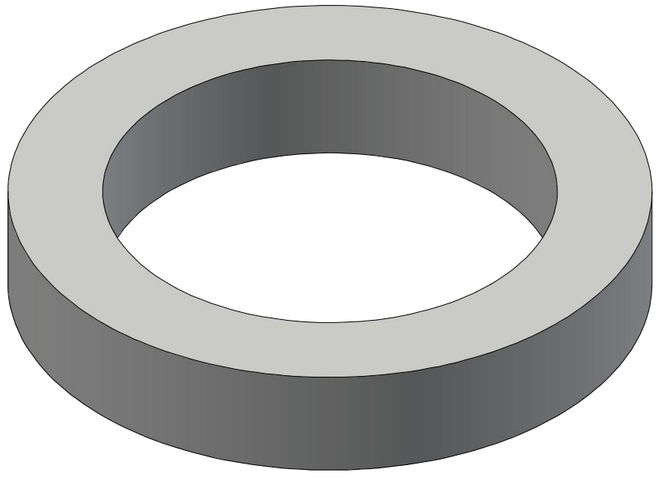

ISO VIEW

CHANGE HISTORY			
NO.	DESCRIPTION	DATE	BY
1	2403-56697	3/21/24	CTC
2			
3			

BURY DEPTH:	N/A to N/A		
WATER LEVEL:	0.0'	APPROX. WEIGHT:	238.99 Lbs
DESIGN SPEC:	AASHTO M199,ASTM C478	LOADING SPEC:	N/A
REINFORCEMENT TYPE:	Plain Wire	LIFTING TYPE:	None

JENSEN PRECAST EST. 1968

WWW.JENSENPRECAST.COM

©2025 Jensen Precast- All rights reserved.
All materials appearing as Jensen Precast documents and the like are proprietary work product and are protected under U.S. copyright and other laws.
Unless in conjunction with business conducted with Jensen Precast, any use of Jensen Precast work product without express, written consent is prohibited, and recipient is prohibited from distributing any and all work product to non-approved third parties under penalty of civil action.

DESCRIPTION:	Grade Ring D2434x6 Flat CASTING LAYOUT		REV: A-1
PART NUMBER:	100004573	DRAWN BY:	C. Cowen
CREATED:	3/21/2024	MODIFIED:	9/23/2025
			SHEET: 1 OF 1