
NOTES
■ FOR COMPLETE DESIGN AND PRODUCT INFORMATION CONTACT JENSEN PRECAST.

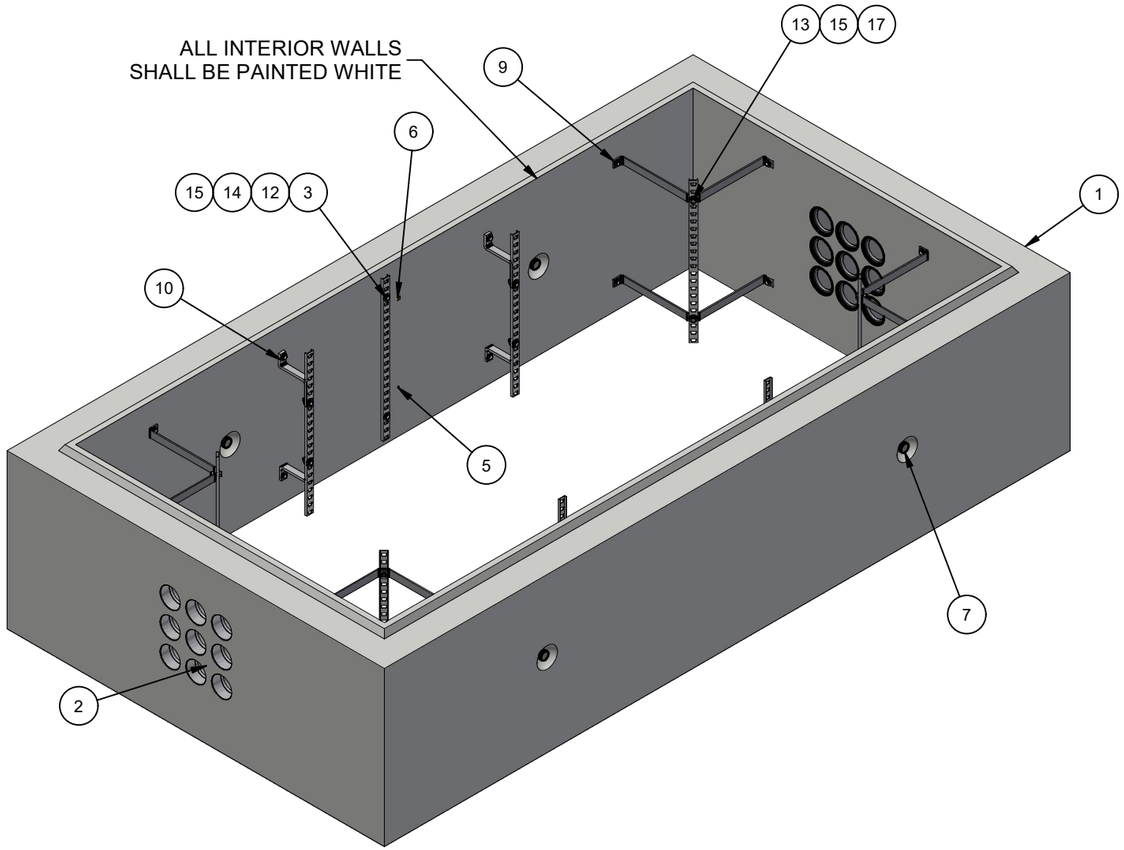

ISO LAYOUT

BILL OF MATERIALS

ITEM	QTY	PART NUMBER	DESCRIPTION
1	75.621 ft^3	100011427	CONCRETE MIX GENERIC 6000 PSI
2	18	100003014	TERMINATOR DUCT WITH SEAL 4.5IN OR 4.35IN T4351
3	36	100019623	TERMINATOR DUCT EXTENSION 4X2 TBE4X2
4	28	100007278	INSERT PLASTIC WITH BREAK OFF SNAP 1/2IN I-5000
5	2	100005928	INSERT FERRULE LOOP 1/4 X 2-3/4 PLATED F42
6	2	100005931	GROUND INSERTS BOTTLE ROCKET BRASS 1/4X16 STEEL ROD 12D69
7	8	100002879	ANCHOR DOGBONE P52 8T X 4-3/4" GALV
8	2.000 gal	100006420	COATING PAINT LATEX WHITE
9	8	100002583	CABLE RACK CORNER SUPPORT 18 X 18 10A56 GALV
10	8	100008361	CABLE RACK SUPPORT L-BRACKET 1/2 x 1-1/4 X 6-9/16 INW 10A46
11	4	100007105	CLAMP BONDING LEAD GTE 12A56
12	10.000 ft	100007103	BONDING RIBBON 1/4
13	28	100013415	MACHINE BOLT 1/2-13 UNRC-2A 2IN HDG
14	60	100008814	WASHER FLAT 1/2 REGULAR TYPE A GALV
15	10	100002528	CABLE RACK 22 HOLE GALV W/O TABS
16	16	100034614	HEX BOLT 1/2-13 UNC 1.5 GALV
17	16	100007007	HEX NUT 1/2-13 UNC HEAVY GALV
18	1	300125334	REINFORCING MAT 300125334

LIFTING NOTES
■ OUTER FACE LIFTERS: THIS CONCRETE PRODUCT IS DESIGNED TO BE LIFTED AT 3,000PSI WITH 4 LIFT CONNECTIONS EQUALLY LOADED TO 2 LIFTING POINTS AT A MINIMUM 60° SLING ANGLE, MEASURED FROM HORIZONTAL.
■ INNER FACE LIFTER: THIS CONCRETE PRODUCT IS DESIGNED TO BE LIFTED AT 4,000PSI WITH 4 LIFT CONNECTIONS EQUALLY LOADED TO 2 LIFTING POINTS AT A MINIMUM 60° SLING ANGLE, MEASURED FROM HORIZONTAL.

REVISION HISTORY			
REV	DESCRIPTION	DATE	BY
B	UPDATED LEGACY PART TO HAVE INVENTOR MODEL AND ACCURATE BOM	7/8/2020	MRV

BURY DEPTH:	0.8' - 9.3' to Top of Section		
WATER LEVEL:	3.5'	WEIGHT:	11445.9 Lbs
DESIGN SPEC:	ASTM C857,ACI 318	LOADING SPEC:	A-16 (AASHTO HS20-44)
REINFORCEMENT TYPE:	Rebar	LIFTING TYPE:	Dogbone


JENSEN PRECAST EST. 1968

WWW.JENSENPRECAST.COM


©2019 Jensen Precast- All rights reserved.
All materials appearing as Jensen Precast documents and the like are proprietary work product and are protected under U.S. copyright and other laws.
Unless in conjunction with business conducted with Jensen Precast, any use of Jensen Precast work product without express, written consent is prohibited, and recipient is prohibited from distributing any and all work product to non-approved third parties under penalty of civil action.

DESCRIPTION:	Pull Box 72144x36 Rect. Riser Terminators AT&T Int. Coating - White Latex Paint CASTING LAYOUT		REV: B-1
PART NUMBER:	100004710	DRAWN BY:	M.Vallarino
CREATED:	5/2/2019	MODIFIED:	7/28/2020
			SHEET: 1 OF 2


4710 obs.idw

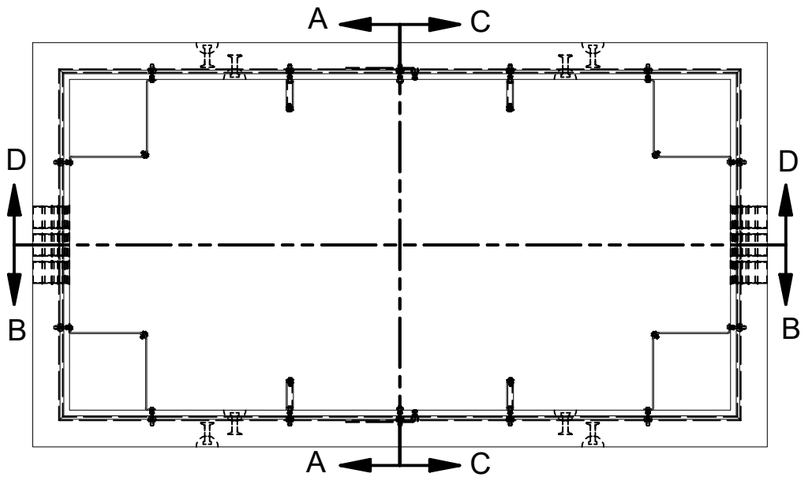


PLAN VIEW

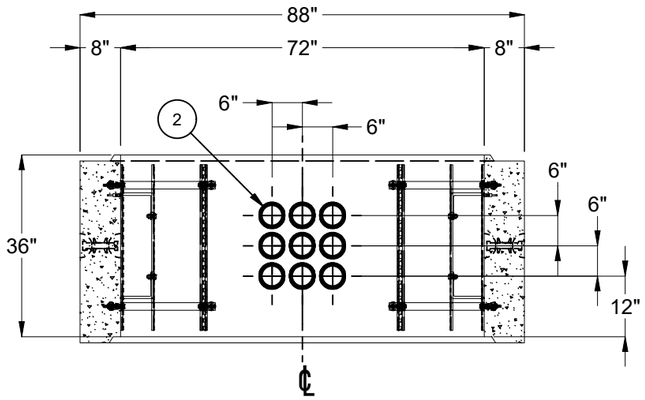


SECTION A-A

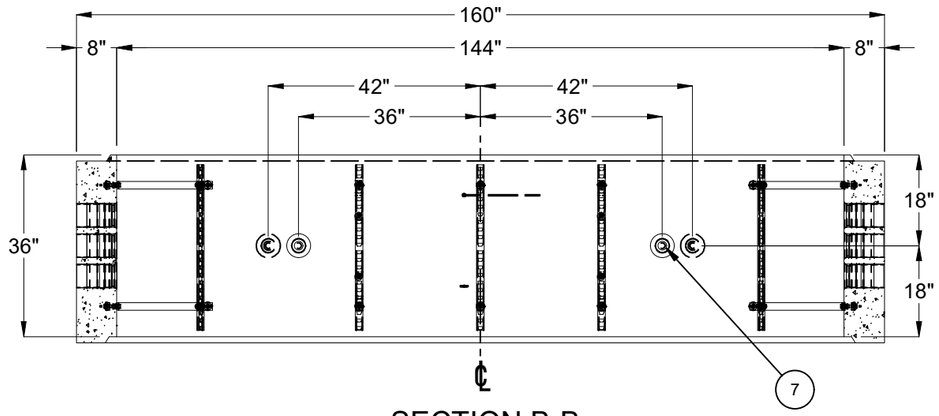


SECTION B-B




DETAIL 1



DETAIL 2

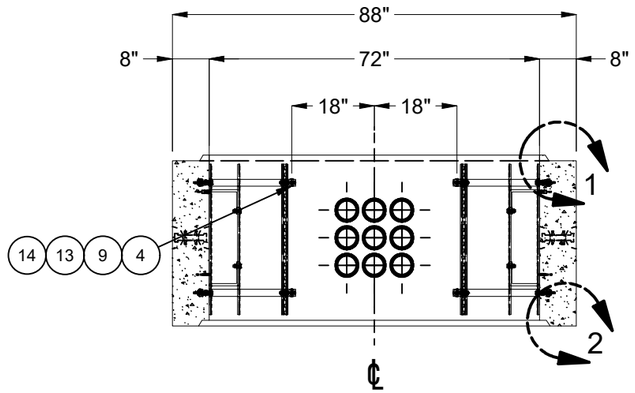

SECTION C-C

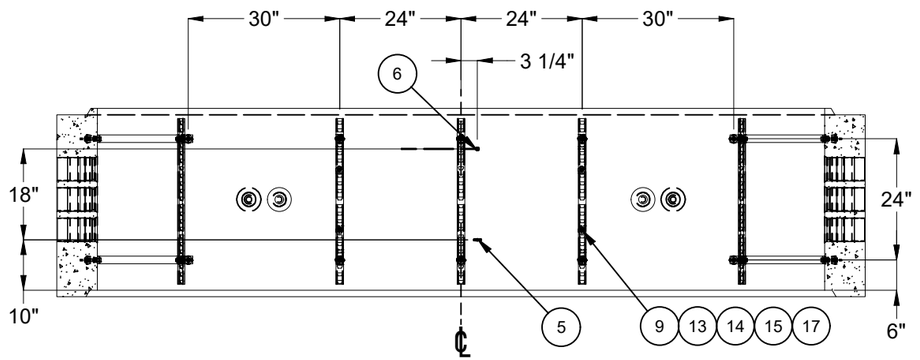

SECTION D-D

BURY DEPTH:	0.8' - 9.3' to Top of Section		
WATER LEVEL:	3.5'	WEIGHT:	11445.9 Lbs
DESIGN SPEC:	ASTM C857,ACI 318	LOADING SPEC:	A-16 (AASHTO HS20-44)
REINFORCEMENT TYPE:	Rebar	LIFTING TYPE:	Dogbone

JENSEN PRECAST EST. 1968

WWW.JENSENPRECAST.COM

©2019 Jensen Precast- All rights reserved.
All materials appearing as Jensen Precast documents and the like are proprietary work product and are protected under U.S. copyright and other laws.
Unless in conjunction with business conducted with Jensen Precast, any use of Jensen Precast work product without express, written consent is prohibited, and recipient is prohibited from distributing any and all work product to non-approved third parties under penalty of civil action.

DESCRIPTION:	Pull Box 72144x36 Rect. Riser Terminators AT&T Int. Coating - White Latex Paint CASTING DRAWING		REV: B-1
PART NUMBER:	100004710	DRAWN BY:	M.Vallarino
CREATED:	5/2/2019	MODIFIED:	7/28/2020
			SHEET: 2 OF 2

4710 obs.idw