

NOTES
■ DESIGNED IN ACCORDANCE WITH C478 LOADING USING 5,500 PSI COMPRESSIVE STRENGTH CONCRETE AND 60,000 PSI YIELD STRENGTH ASTM A-706 STEEL REINFORCEMENT PER CALCS. #30212.
■ ALL PARTS TO BE STENCILED: MFG DATE / JOB NUMBER / PRODUCT ID / WEIGHT.

BILL OF MATERIALS


ITEM	UNIT QTY	QTY	PART NUMBER	DESCRIPTION
1	0.924 ft^3	0.924 ft^3	100005993	CONCRETE 5500 PSI DRYCAST MIX
2	1	1	100017853	REINFORCING MAT 100017853
3	1	3	100028358	ANCHOR DOGBONE P52 1T X 2-5/8" GALV

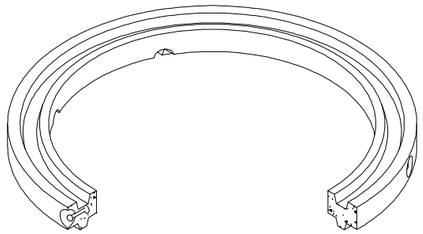


ISO VIEW

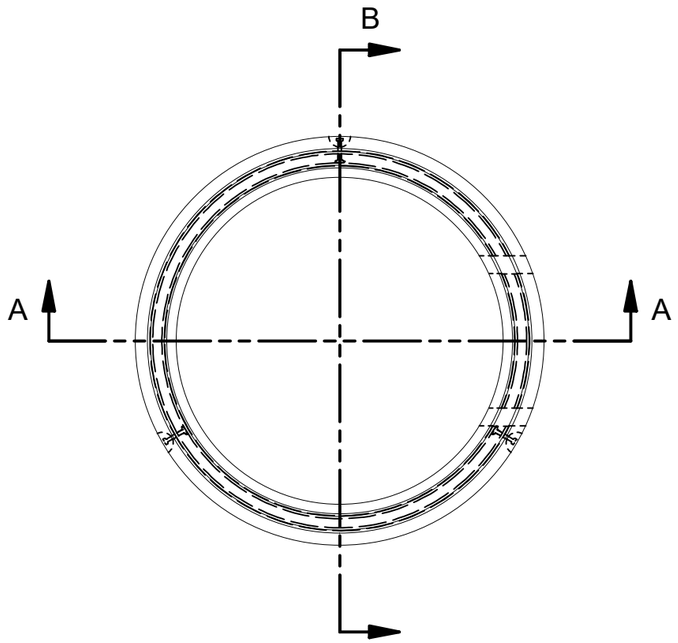


PLAN VIEW

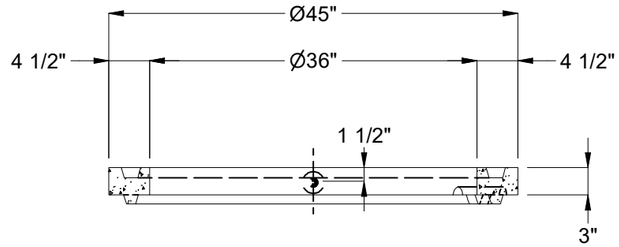

SECTION A-A

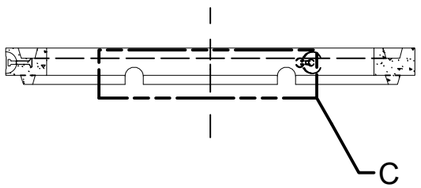

SECTION B-B

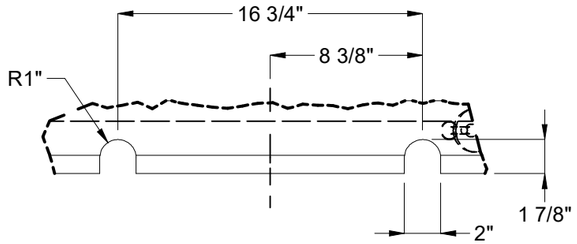

DETAIL C
NOTCHES FOR KNURLED STEP

LIFTING NOTES
■ THIS CONCRETE PRODUCT IS DESIGNED TO BE LIFTED AT 2,500 PSI WITH 3 LIFT CONNECTIONS EQUALLY LOADED TO 3 LIFTING POINTS AT A MINIMUM 90° SLING ANGLE, MEASURED FROM HORIZONTAL.

BURY DEPTH:	0.0' - 3.5' to Top of Section		
WATER LEVEL:	3.0'	APPROX. WEIGHT:	142.55 Lbs
DESIGN SPEC:	ASTM C857	LOADING SPEC:	A-16 (AASHTO HS20-44)
REINFORCEMENT TYPE:	Rebar	LIFTING TYPE:	Insert

Infrastructure
JENSEN
WWW.JENSENINFRASTRUCTURE.COM

©2026 Jensen Infrastructure - All rights reserved.
All materials appearing as Jensen Infrastructure documents and the like are proprietary work product and are protected under U.S. copyright and other laws.
Unless in conjunction with business conducted with Jensen Infrastructure , any use of Jensen Infrastructure work product without express, written consent is prohibited, and recipient is prohibited from distributing any and all work product to non-approved third parties under penalty of civil action.
This product shall only be produced in a Jensen Infrastructure facility.

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
B	UPDATED TITLE BLOCK	1/12/2026	

DESCRIPTION:	Grade Ring D3645x3 CASTING LAYOUT		REV: B
PART NUMBER:	100008557	DRAWN BY: C.Aguillon	SHEET: 1 OF 1
CREATED:	10/12/2018	MODIFIED: 1/12/2026	

100008557.idw