
DESIGN NOTES
■ HATCH SIDE RATED FOR H-20 TRAFFIC, CABINET SIDE RATED FOR 300 PSF
■ CONFORMS TO PGE SPECIFICATION L26100 DATED 12-11-2018
■ FOR COMPLETE DESIGN AND PRODUCT INFORMATION CONTACT JENSEN PRECAST.

BILL OF MATERIALS

ITEM	UNIT QTY	QTY	PART NUMBER	DESCRIPTION
1	9.783 ft^3	9.783 ft^3	100011425	CONCRETE MIX 5000 PSI
4	1	2	100002766	INSERT FERRULE LOOP 5/8 X 3-1/2 PLATED FX-5
5	1	2	100034833	ANCHOR RAPID LIFT TECH 2.5T CLUTCH 2.4375IN LONG MB RL-25
6	1	1	100031278	PLATE 2x3 BRASS
7	1	2	100002765	INSERT FERRULE LOOP 1/2 X 2-3/4 PLATED FX-5
8	1	1	400001442	REINFORCING MAT 400001442
9	1	1	200061796	CAS1-3333-CHF4-DP-G-BD-GR-SL-PNW-OH07-332

200030471.idw

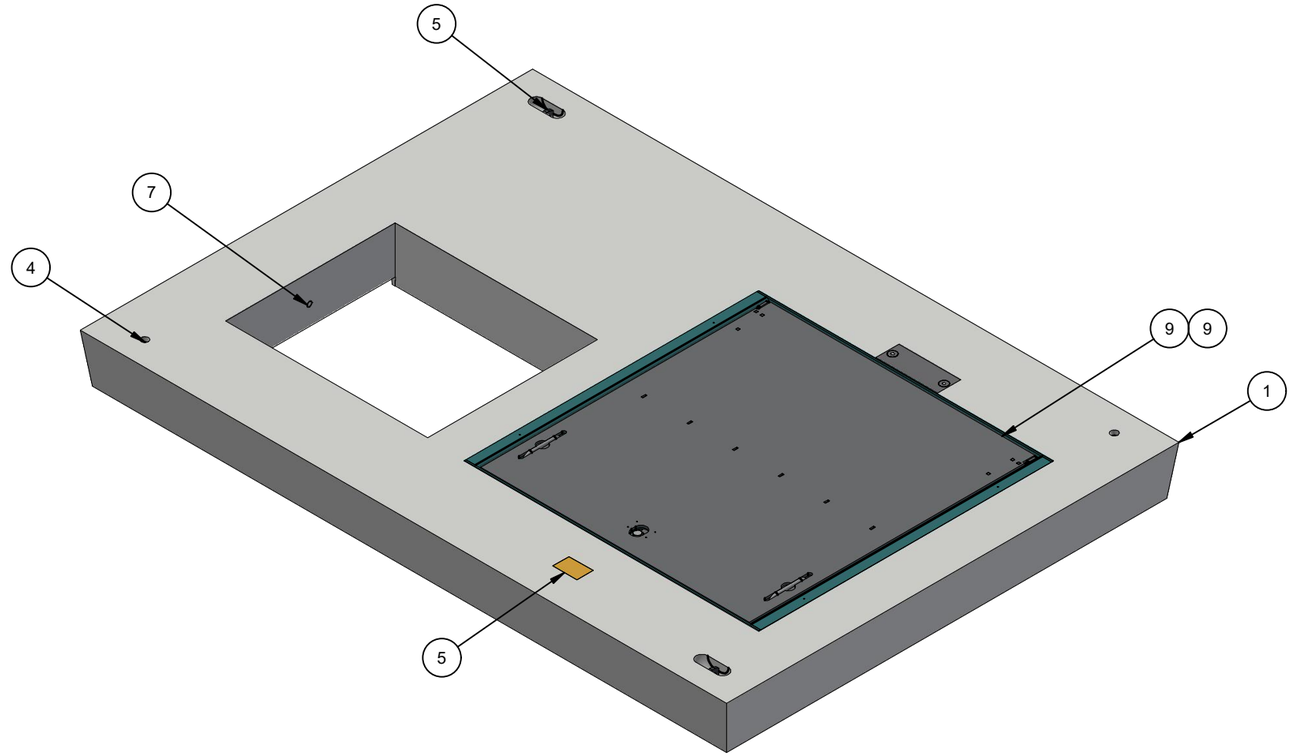

ISO LAYOUT

LIFTING NOTES
■ PLANT DEMOLDING AND FIELD INSTALLATION: MINIMUM HANDLING CONCRETE STRENGTH F'c = 2500 PSI WITH LOAD EQUALIZED TO 2 LIFTING POINTS WITH A SLING ANGLE BETWEEN 60° AND 90° .

REVISION HISTORY			
REV	DESCRIPTION	DATE	BY
A	INITIAL RELEASE	7/29/2020	MBE
B	HATCH AND REBAR UPDATED	3/9/2022	T.Larson
C	BOM UPDATE DUE TO HATCH	3/16/2023	DCH


BURY DEPTH:	0.0' - 0.0' to Top		
WATER LEVEL:	Below Structure	WEIGHT:	1651.33 Lbs
DESIGN SPEC:	ASTM C857,ACI 318	LOADING SPEC:	A-16 (AASHTO HS20-44)
REINFORCEMENT TYPE:	Rebar	LIFTING TYPE:	Tech Erection Anchor

JENSEN PRECAST EST. 1968


WWW.JENSENPRECAST.COM

©2019 Jensen Precast- All rights reserved.
All materials appearing as Jensen Precast documents and the like are proprietary work product and are protected under U.S. copyright and other laws.
Unless in conjunction with business conducted with Jensen Precast, any use of Jensen Precast work product without express, written consent is prohibited, and recipient is prohibited from distributing any and all work product to non-approved third parties under penalty of civil action.


DESCRIPTION:	Vault 4266x7 Slab Top 36"x36"E, 21"x25"E Cast-In Cover PGE Portland 39638 CASTING LAYOUT		REV: C-1
PART NUMBER:	200030471	DRAWN BY:	T.Larson
CREATED:	10/8/2019	MODIFIED:	3/16/2023
			SHEET: 1 OF 2

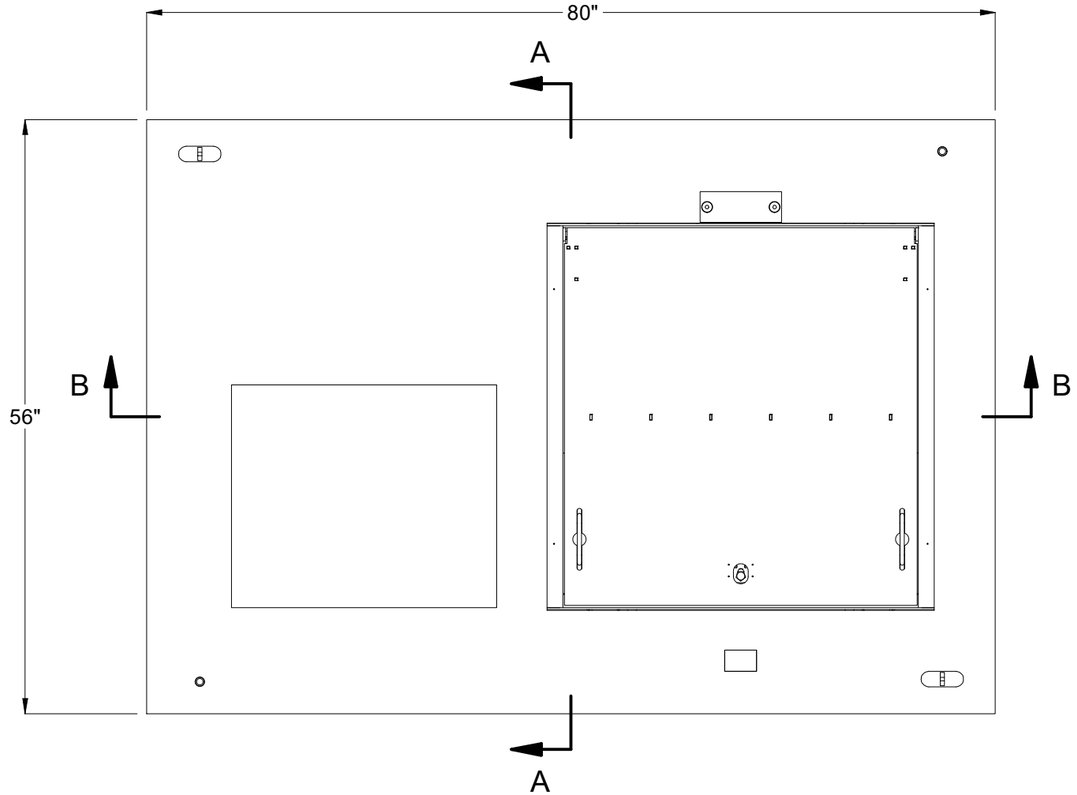


PLAN VIEW

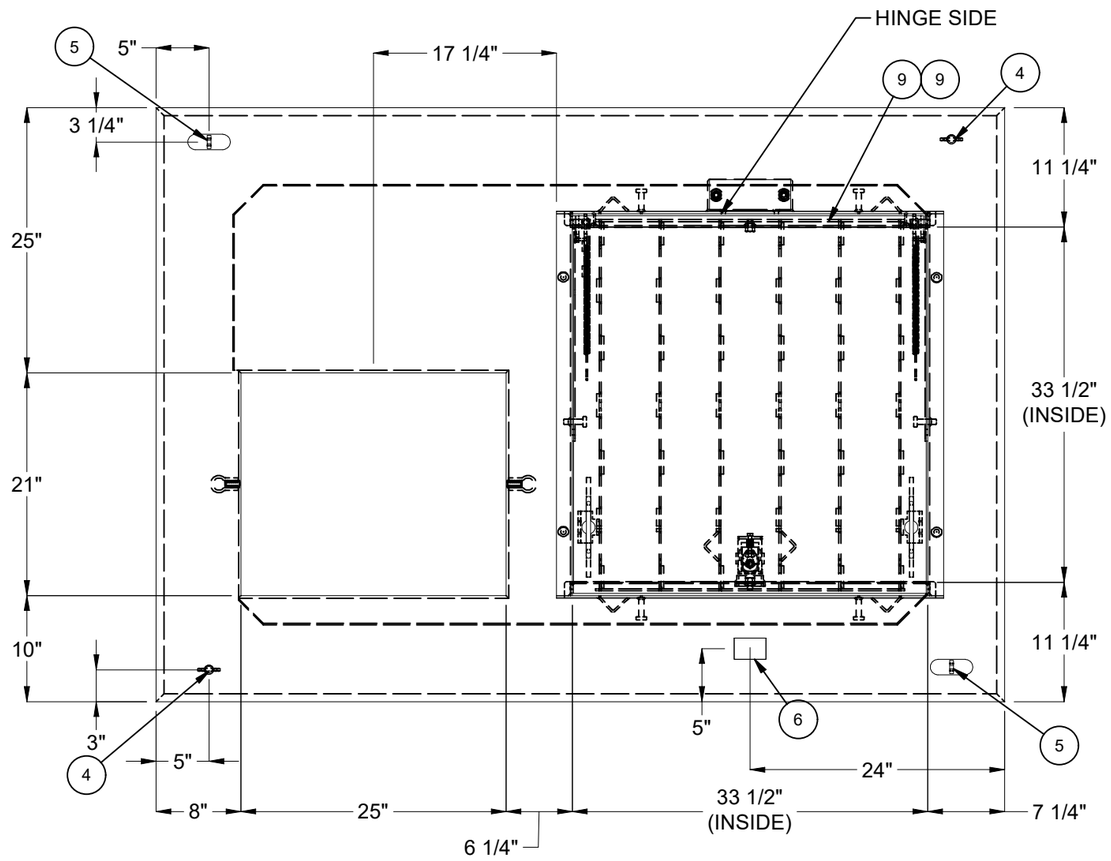

PLAN VIEW
(SHOWING OBJECT DIMENSIONS)

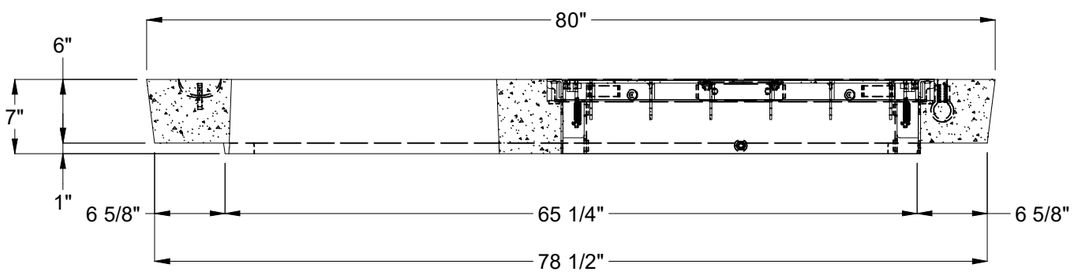

SECTION B-B
(OPPOSITE SIDE SIMILAR)

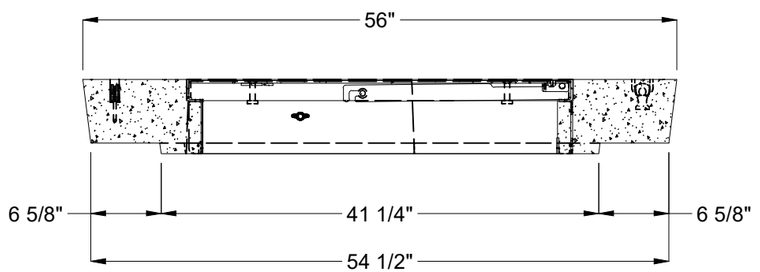

SECTION A-A
(OPPOSITE SIDE SIMILAR)

BURY DEPTH:	0.0' - 0.0' to Top		
WATER LEVEL:	Below Structure	WEIGHT:	1651.33 Lbs
DESIGN SPEC:	ASTM C857,ACI 318	LOADING SPEC:	A-16 (AASHTO HS20-44)
REINFORCEMENT TYPE:	Rebar	LIFTING TYPE:	Tech Erection Anchor

JENSEN PRECAST EST. 1968
WWW.JENSENPRECAST.COM

©2019 Jensen Precast- All rights reserved.
All materials appearing as Jensen Precast documents and the like are proprietary work product and are protected under U.S. copyright and other laws.
Unless in conjunction with business conducted with Jensen Precast, any use of Jensen Precast work product without express, written consent is prohibited, and recipient is prohibited from distributing any and all work product to non-approved third parties under penalty of civil action.

DESCRIPTION:
Vault 4266x7 Slab Top 36"x36"E, 21"x25"E Cast-In Cover PGE Portland 39638
CASTING DRAWING

PART NUMBER:	200030471	DRAWN BY:	T.Larson
CREATED:	10/8/2019	MODIFIED:	3/16/2023

REV: C-1
SHEET: 2 OF 2

200030471.idw