NOTES
■ CONCRETE MIX USED IN POURING THIS PRODUCT SHALL USE FLY ASH AS AN ADMIXTURE.
■ ALL PARTS TO BE STENCILED: MFG DATE / JOB NUMBER / PRODUCT ID / WEIGHT.

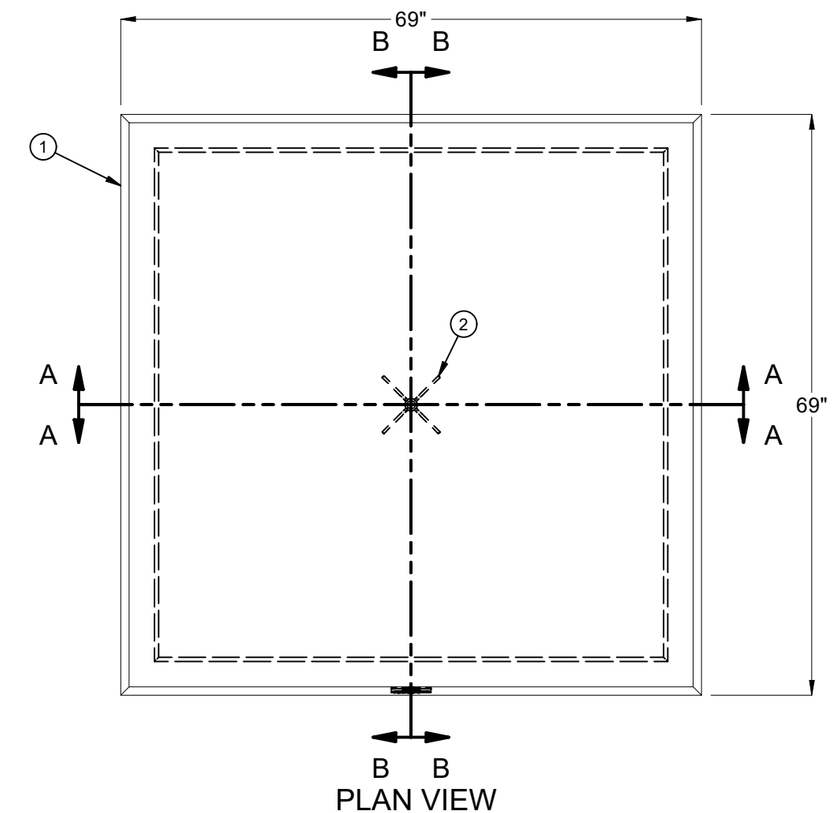

PLAN VIEW

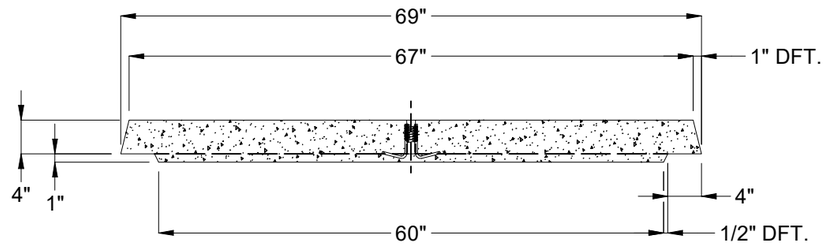

SECTION A-A

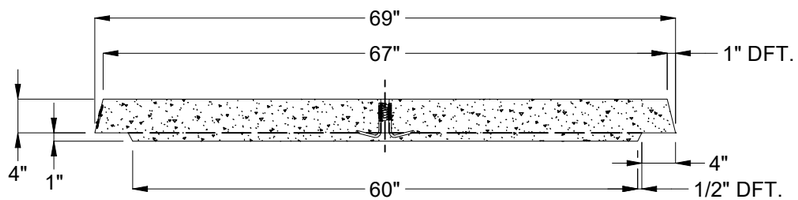

SECTION B-B

BILL OF MATERIALS

ITEM	UNIT QTY	QTY	PART NUMBER	DESCRIPTION
1	12.821 ft^3	12.821 ft^3	100006029	CONCRETE 5500 PSI SCC ED
2	1	1	100044597	Insert Thin Slab Coil 4-Leg 1 x 4" Galv (F53 or Equiv.)
3	1	1	100008132	RFI PLASTIC TAG IDENCIA
4	1	1	100017995	REINFORCING MAT 100017995

LIFTING NOTES
■ DEMOLDING: THIS CONCRETE PRODUCT IS DESIGNED TO BE LIFTED AT 2,500 PSI WITH 1 LIFT CONNECTIONS EQUALLY LOADED TO 1 LIFTING POINTS AT A MINIMUM 90° SLING ANGLE, MEASURED FROM HORIZONTAL.
■ INSTALLATION: THIS CONCRETE PRODUCT IS DESIGNED TO BE LIFTED AT 5,500 PSI WITH 1 LIFT CONNECTIONS EQUALLY LOADED TO 1 LIFTING POINTS AT A MINIMUM 90° SLING ANGLE, MEASURED FROM HORIZONTAL.

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	1/15/2020	
A	REVISED FOR RELEASE	1/15/2020	

BURY DEPTH:	Above Ground to Above Ground		
WATER LEVEL:	Below Structure	WEIGHT:	1927.83 Lbs
DESIGN SPEC:	ASTM C857,ACI 318	LOADING SPEC:	A-03 (300 psf)
REINFORCEMENT TYPE:	Rebar	LIFTING TYPE:	Insert

JENSEN PRECAST EST. 1968

WWW.JENSENPRECAST.COM

©2020 Jensen Precast- All rights reserved.
All materials appearing as Jensen Precast documents and the like are proprietary work product and are protected under U.S. copyright and other laws.
Unless in conjunction with business conducted with Jensen Precast, any use of Jensen Precast work product without express, written consent is prohibited, and recipient is prohibited from distributing any and all work product to non-approved third parties under penalty of civil action.

DESCRIPTION:	Temporary Cover Pad 6969x4 EDISON UGS SS590 CASTING LAYOUT			REV: B
PART NUMBER:	100012274	DRAWN BY:	R. Ramos	SHEET: 1 OF 1
CREATED:	1/15/2020	MODIFIED:	1/15/2020	

100012274.idw