
NOTES
■ MINIMUM EXCAVATION SIZE: 14'-0" x 7'-9" DEPTH REQ'D.
■ FOR COMPLETE DESIGN AND PRODUCT INFORMATION CONTACT JENSEN PRECAST.


BILL OF MATERIALS

ITEM	QTY	PART NUMBER	DESCRIPTION	WEIGHT (LBS)
1	1	200025492	Tank PJP 2000 Gallon 6 Inch Rect. Bottom Section Single Baffle	17659
2	1	200031836	Vertical Slab Baffle PJP 2000	1205

200032263.idw

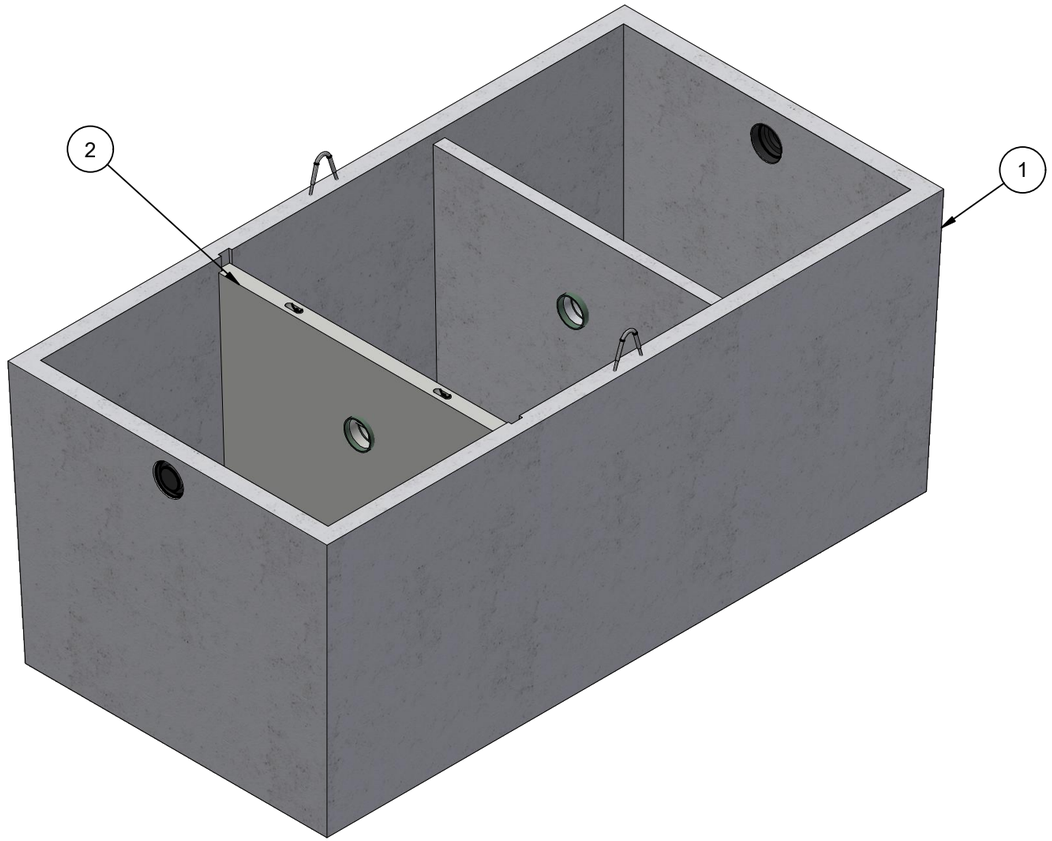

ISO LAYOUT

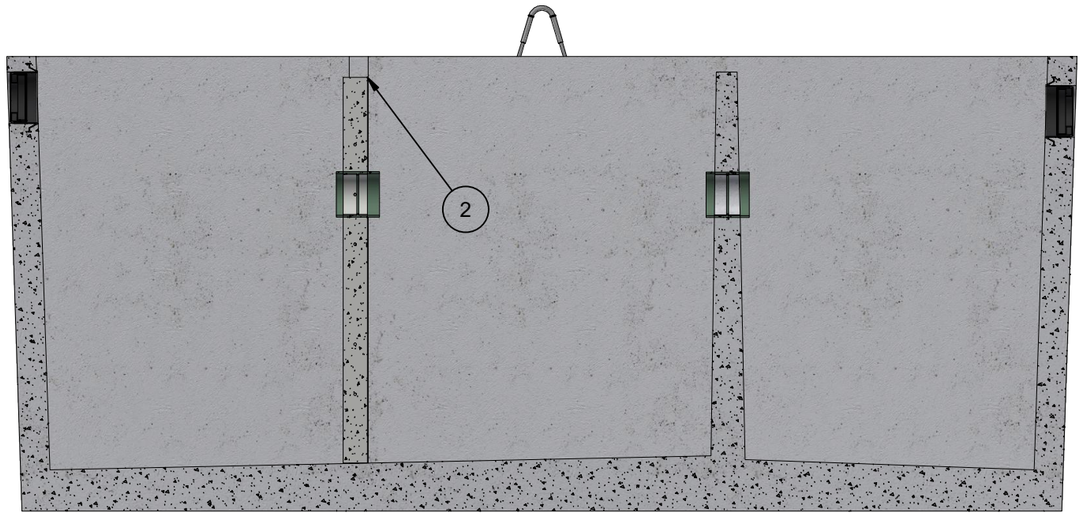

SECTION

REVISION HISTORY			
REV	DESCRIPTION	DATE	BY
A	DRAWING CREATED	10/29/2019	T.Larson

BURY DEPTH:	5.3' - 12.1' to Inside Floor		
WATER LEVEL:	Below Structure	WEIGHT:	18863.56 Lbs
DESIGN SPEC:	ASTM C890,ACI 318	LOADING SPEC:	A-16 (AASHTO HS20-44)
REINFORCEMENT TYPE:		LIFTING TYPE:	Cable

JENSEN PRECAST EST. 1968

WWW.JENSENPRECAST.COM

©2018 Jensen Precast- All rights reserved.
All materials appearing as Jensen Precast documents and the like are proprietary work product and are protected under U.S. copyright and other laws.
Unless in conjunction with business conducted with Jensen Precast, any use of Jensen Precast work product without express, written consent is prohibited, and recipient is prohibited from distributing any and all work product to non-approved third parties under penalty of civil action.

DESCRIPTION:	Tank PJP 2000 Gallon 6 Inch Assembly Double Baffle LAYOUT REVIEW		REV: A
PART NUMBER:	200032263	DRAWN BY:	T.Larson
CREATED:	1/31/2019	MODIFIED:	2/14/2020
			SHEET: 1 OF 1