
| DESIGN NOTES |
|---|
| ■ MINIMUM EXCAVATION SIZE:11'-4" X 6'-0" DEPTH REQ'D. |
| ■ FOR COMPLETE DESIGN AND PRODUCT INFORMATION CONTACT JENSEN PRECAST. |

## BILL OF MATERIALS

| ITEM | QTY | PART NUMBER | DESCRIPTION |
|---|---|---|---|
| 1 | 1 | 200029400 | Tank PJS 1050 Gallon 4 Inch Rect. Bottom Section Single Baffle |
| 2 | 1 | 200030841 | Tank PJS 1050 Gallon x 5 Slab Top 24 EBE |
| 3 | 2 | 100013648 | SEALANT JOINT BUTYL RUBBER ASTM C-990 AND M198 CS-102 1IN EQUIV X14.5FT PER ROLL |

200038382.idw

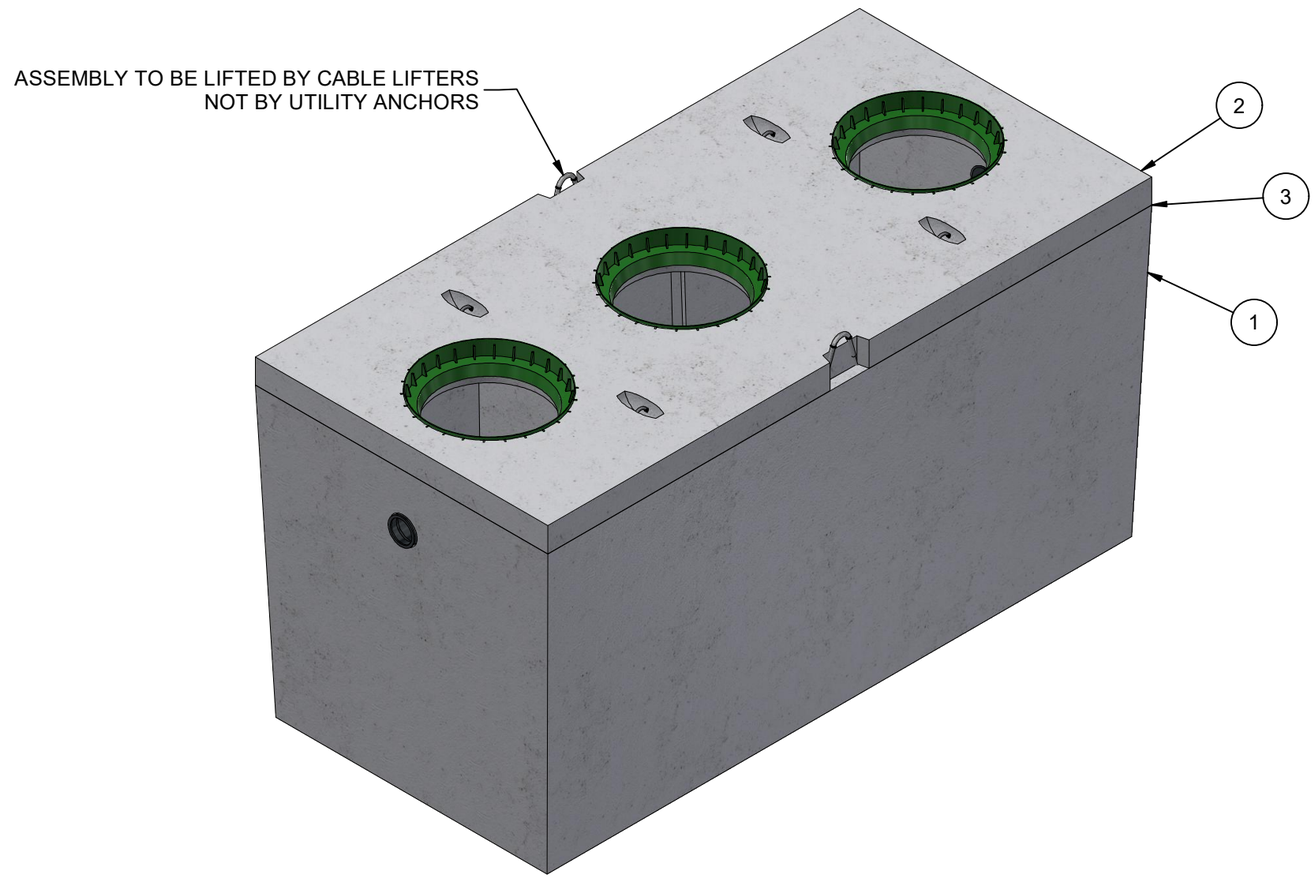


ISO LAYOUT

| LIFTING NOTES |
|---|
| ■ FIELD INSTALLATION: PLANT DEMOLDING: MINIMUM HANDLING CONCRETE STRENGTH F'c = 2500 PSI RIGGING EQUALIZER REQUIRED TO EQUALIZE LOAD TO 2 LIFTING POINTS WITH A SLING ANGLE OF 90° |

| REVISION HISTORY | | | |
|---|---|---|---|
| REV | DESCRIPTION | DATE | BY |
| A-1 | DRAWING CREATED | 02/25/2021 | N. Posey |

| | | | |
|---|---|---|---|
| BURY DEPTH: | 0.0' - 3.0' to Top of Top Slab | | |
| WATER LEVEL: | Below Structure | WEIGHT: | 13264.6 Lbs |
| DESIGN SPEC: | ASTM C890,ACI 318 | LOADING SPEC: | A-02 (200 psf) |
| REINFORCEMENT TYPE: | | LIFTING TYPE: | Cable |

JENSEN PRECAST EST. 1968

WWW.JENSENPRECAST.COM

©2018 Jensen Precast- All rights reserved.
All materials appearing as Jensen Precast documents and the like are proprietary work product and are protected under U.S. copyright and other laws.
Unless in conjunction with business conducted with Jensen Precast, any use of Jensen Precast work product without express, written consent is prohibited, and recipient is prohibited from distributing any and all work product to non-approved third parties under penalty of civil action.

| | | | |
|---|---|---|---|
| DESCRIPTION: | Tank PJS 1050 Gallon 4 Inch Assembly EBE Single Baffle<br>LAYOUT REVIEW | | REV: A-1 |
| PART NUMBER: | 200038382 | DRAWN BY: | N. Posey |
| CREATED: | 4/15/2020 | MODIFIED: | 2/25/2021 |
| | | | SHEET: 1 OF 1 |