

NOTES
■ CONCRETE MIX USED IN POURING THIS PRODUCT SHALL USE FLY ASH AS AN ADMIXTURE.
■ ALL PARTS TO BE STENCILED: MFG DATE / PRODUCT ID / WEIGHT.
■ EACH CONCRETE SECTION SHALL BE MARKED ON THE INSIDE & OUTSIDE WITH "JENSEN", THE DESIGNATION "DWP/FA-CN", AND THE DATE OF THE POUR.
■ EACH CONCRETE SECTION SHALL HAVE CAST-IN ON THE INSIDE "JENSEN", THE YEAR, AND THE DESIGNATION "FA-CN".

BILL OF MATERIALS


ITEM	UNIT QTY	QTY	PART NUMBER	DESCRIPTION
1	1	1	200039554	Top Riser 4878x12 Cast-In Frame LADWP G-286 G-1, COLA
2	1	2	200042239	Support Beam 51.375in T Beam (F466-PB-LA D) COLA
3	1	3	100007060	COVER 4878 466 POLYMER LADWP
4	1	6	100007134	WASHER FLAT 1/2 REGULAR TYPE A 316SS
5	1	6	100007123	PENTA BOLT 1/2-13 UNC 2-1/2 7/8HEAD 304SS

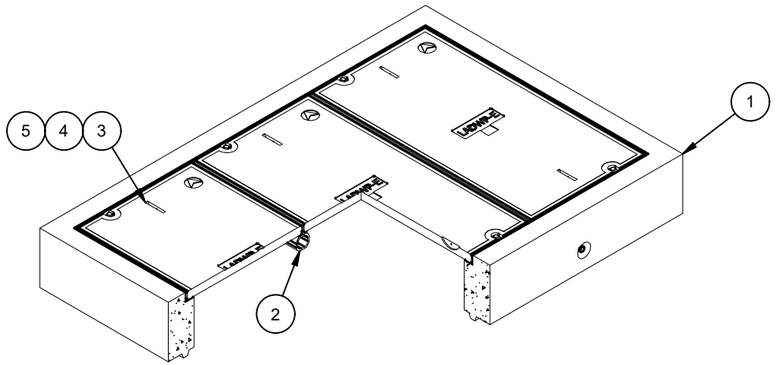


ISOMETRIC VIEW

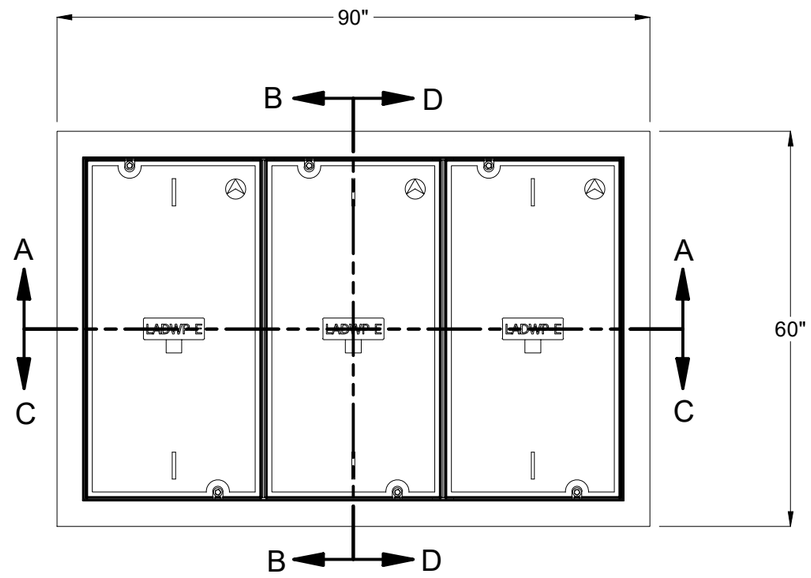


PLAN VIEW

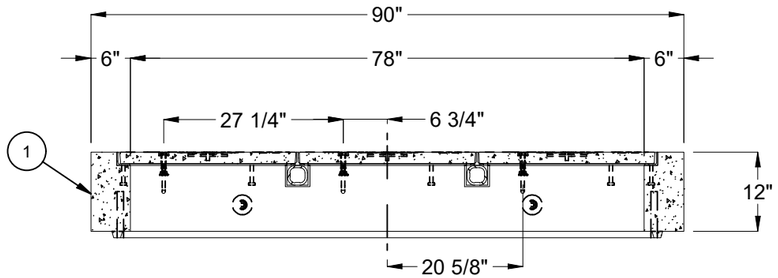


SECTION A-A

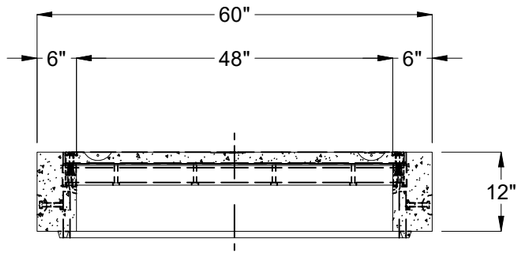

SECTION B-B

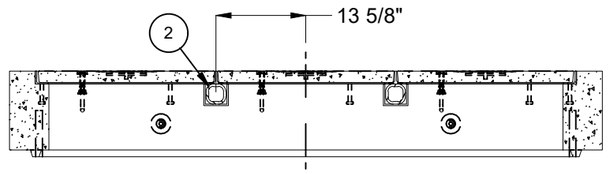


SECTION C-C



SECTION D-D

LIFTING NOTES
■ THIS CONCRETE PRODUCT IS DESIGNED TO BE LIFTED AT 5500 PSI WITH 4 LIFT CONNECTIONS EQUALLY LOADED TO 2 LIFTING POINTS AT A MINIMUM 60° SLING ANGLE, MEASURED FROM HORIZONTAL.
*All rigging shall be design by a qualified professional. Loading diagrams show illustrations of possible rigging setups to achieve the required sling angle and load leg equalization. Other valid rigging configurations are possible. A qualified professional must be consulted prior to lifting.

RIGGING DIAGRAM*	B



BURY DEPTH:	0.0' - 0.0' to Top		
WATER LEVEL:	3.0'	APPROX. WEIGHT:	2578.55 Lbs
DESIGN SPEC:	AASHTO LRFD,ASTM C857	LOADING SPEC:	A-03 (300 psf)
REINFORCEMENT TYPE:		LIFTING TYPE:	Dogbone

Infrastructure
JENSEN
WWW.JENSENINFRASTRUCTURE.COM

©2026 Jensen Infrastructure - All rights reserved.
All materials appearing as Jensen Infrastructure documents and the like are proprietary work product and are protected under U.S. copyright and other laws.
Unless in conjunction with business conducted with Jensen Infrastructure , any use of Jensen Infrastructure work product without express, written consent is prohibited, and recipient is prohibited from distributing any and all work product to non-approved third parties under penalty of civil action.
This product shall only be produced in a Jensen Infrastructure facility.

STOCKPILE - JENSEN INFRASTRUCTURE
CITY OF LOS ANGELES INSPECTION REQUIRED WO# C0034604

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
C-2-1	REPLACED SUPPORT BEAM	8/27/2026	

DESCRIPTION:	Top Riser 4878x12 Assembly LADWP G-286 G-1 REV-31, COLA SALES ASSEMBLY LAYOUT		REV: C-2-1
PART NUMBER:	200039551	DRAWN BY:	J. Prado
CREATED:	5/18/2020	MODIFIED:	8/27/2026
			SHEET: 1 OF 1

200039551.idw