

BILL OF MATERIALS


ITEM	UNIT QTY	QTY	PART NUMBER	DESCRIPTION
1	4.047 ft^3	4.047 ft^3	100005993	CONCRETE 5500 PSI DRYCAST MIX
2	1	4	100002777	INSERT FERRULE LOOP 1/2 X 2-3/4 SS FX-5
3	1	1	100008132	RFI PLASTIC TAG IDENCIA
4	1	2	100017853	REINFORCING MAT 100017853
5	1	3	100002867	ANCHOR DOGBONE P52 2T X 3-3/8" GALV

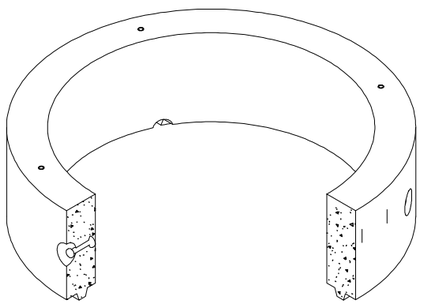


ISO VIEW

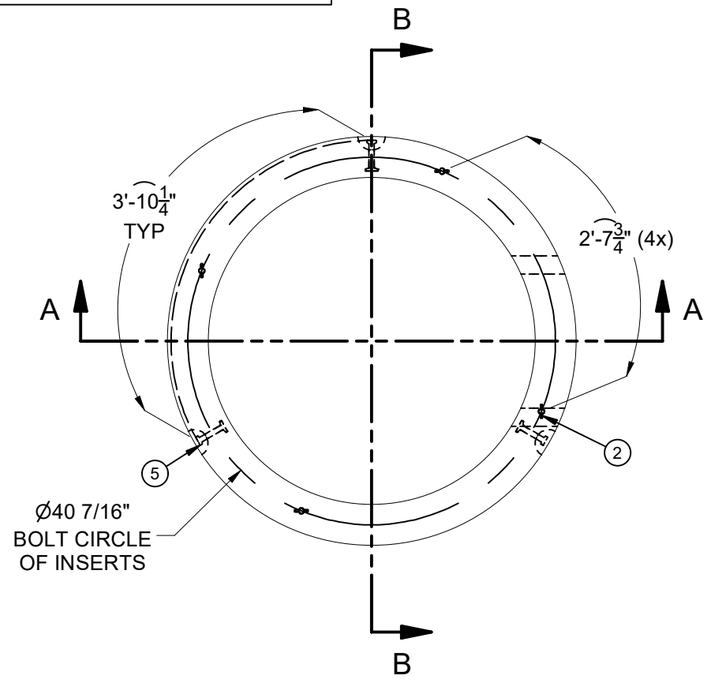


PLAN VIEW

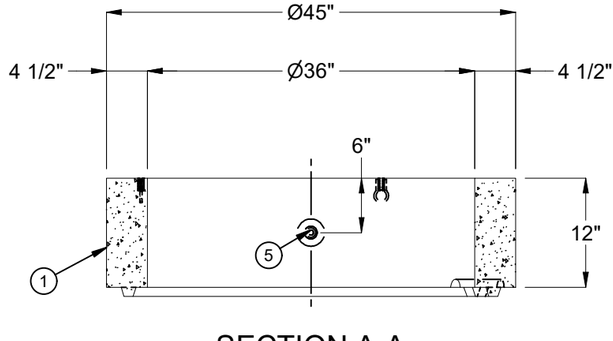


SECTION A-A

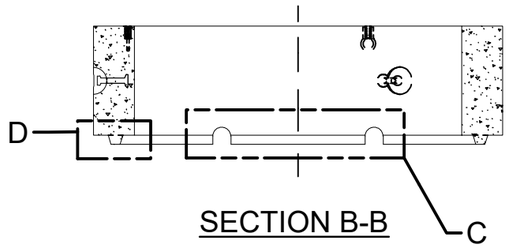

SECTION B-B



DETAIL D

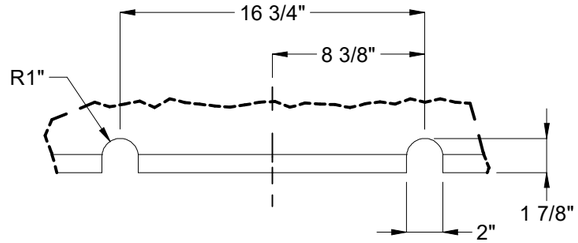

DETAIL C
NOTCHES FOR KNURLED STEP

LIFTING NOTES
■ DEMOLDING: THIS CONCRETE PRODUCT IS DESIGNED TO BE LIFTED AT 2500 PSI WITH 3 LIFT CONNECTIONS EQUALLY LOADED TO 3 LIFTING POINTS AT A MINIMUM 60° SLING ANGLE, MEASURED FROM HORIZONTAL.
■ INSTALLATION: THIS CONCRETE PRODUCT IS DESIGNED TO BE LIFTED AT 5500 PSI WITH 3 LIFT CONNECTIONS EQUALLY LOADED TO 3 LIFTING POINTS AT A MINIMUM 60° SLING ANGLE, MEASURED FROM HORIZONTAL.

BURY DEPTH:	0.0' - 1.0' to Top of Section		
WATER LEVEL:	3.0'	WEIGHT:	615.66 Lbs
DESIGN SPEC:	ASTM C857	LOADING SPEC:	A-16 (AASHTO HS20-44)
REINFORCEMENT TYPE:	Rebar	LIFTING TYPE:	Dogbone

JENSEN PRECAST EST. 1968

WWW.JENSENPRECAST.COM

©2018 Jensen Precast- All rights reserved.
All materials appearing as Jensen Precast documents and the like are proprietary work product and are protected under U.S. copyright and other laws.
Unless in conjunction with business conducted with Jensen Precast, any use of Jensen Precast work product without express, written consent is prohibited, and recipient is prohibited from distributing any and all work product to non-approved third parties under penalty of civil action.

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
B	UPDATE BOM	3/12/2020	

DESCRIPTION: Grade Ring D3645x12 Flat with Inserts CASTING LAYOUT			REV: B
PART NUMBER:	100012643	DRAWN BY: N. Chand	SHEET: 1 OF 1
CREATED:	2/27/2019	MODIFIED: 3/12/2020	

100012643.idw