DESIGN NOTES

- FOR COMPLETE DESIGN AND PRODUCT INFORMATION CONTACT JENSEN PRECAST.

BILL OF MATERIALS

ITEM	UNIT QTY	QTY	PART NUMBER	DESCRIPTION
1	2.413 ft^3	2.413 ft^3	100005976	CONCRETE 4500 PSI GENERIC MIX
2	1	2	100011254	REINF HOOP STEEL 28DIA HOOP DIA W5 .252 WIRE DIA
3	1	2	100002764	Insert Ferrule Loop 0.375 x 2.75" Zinc (F42 or Equiv.)



DETAIL B

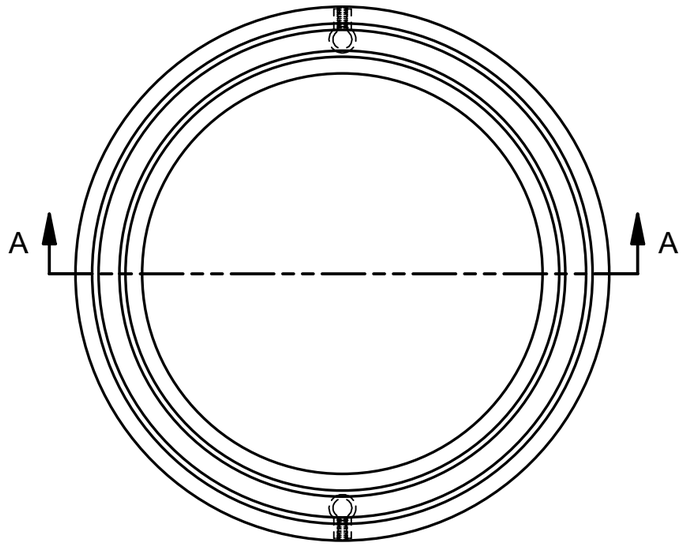

PLAN VIEW

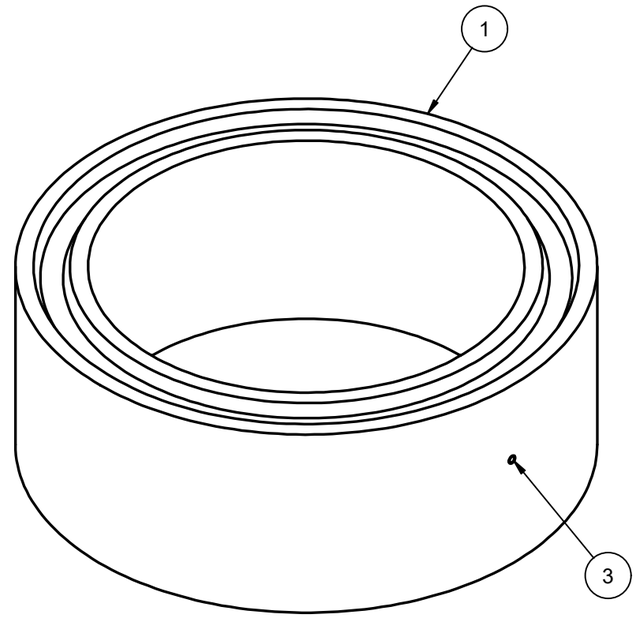

ISO VIEW



DETAIL C

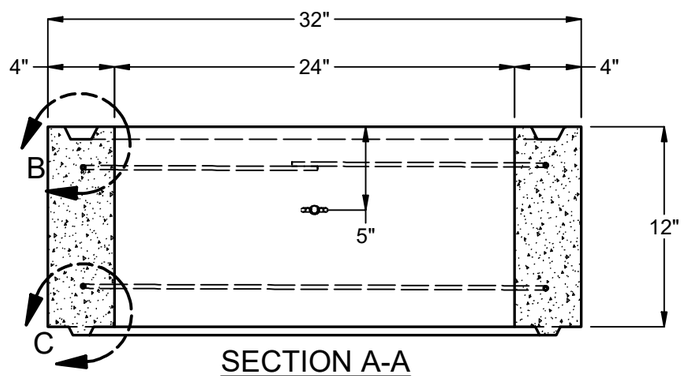

SECTION A-A

LIFTING NOTES

- THIS CONCRETE PRODUCT IS DESIGNED TO BE LIFTED WITH 4 (FOUR) EQUALLY LOADED RIGGINGS LEGS MIN. 60° SLING ANGLE, MEASURED FROM HORIZONTAL.

REVISION HISTORY

REV	DESCRIPTION	DATE	BY
B-1	Initial Creation	12/18/2018	N. Posey

BURY DEPTH:	N/A to N/A		
WATER LEVEL:	N/A	WEIGHT:	365.3 Lbs
DESIGN SPEC:	ASTM C478,AASHTO M199	LOADING SPEC:	N/A
REINFORCEMENT TYPE:	Wire	LIFTING TYPE:	Insert

JENSEN PRECAST EST. 1968

WWW.JENSENPRECAST.COM

©2018 Jensen Precast- All rights reserved.
All materials appearing as Jensen Precast documents and the like are proprietary work product and are protected under U.S. copyright and other laws.
Unless in conjunction with business conducted with Jensen Precast, any use of Jensen Precast work product without express, written consent is prohibited, and recipient is prohibited from distributing any and all work product to non-approved third parties under penalty of civil action.

DESCRIPTION:	Grade Ring D2432x12 CASTING LAYOUT		REV: B-1
PART NUMBER:	200014548	DRAWN BY:	B. Wiltzius
CREATED:	12/18/2018	MODIFIED:	2/18/2021
			SHEET: 1 OF 1

200014548.idw