DESIGN NOTES:


- CONCRETE SHALL HAVE A 28 DAY MINIMUM COMPRESSIVE STRENGTH OF 5000 PSI
- SOIL UNIT WEIGHT DRY - 110 lbs/cu.ft.
- EQUIVALENT LATERAL PRESSURE DRY - 66 lbs/cu.ft.
- SOIL UNIT WEIGHT WET - 120 lbs/cu.ft.
- EQUIVALENT LATERAL PRESSURE WET - 94 lbs/cu.ft.

PRODUCTION NOTES:

- THIS PRODUCT SHALL ONLY BE PRODUCED IN A JENSEN PRECAST FACILITY
- LIFTING INSERTS SHALL BE INSTALLED PER MANUFACTURER'S REQUIREMENTS
- APPLIED FINISH - NONE
- INTERNAL LINER/COATING - NONE
- EXTERNAL LINER/COATING - NONE

BILL OF MATERIALS


ITEM	UNIT QTY	QTY	PART NUMBER	DESCRIPTION
1	33.292 ft^3	33.292 ft^3	100011425	CONCRETE MIX GENERIC 5000 PSI
2	1	1	300121391	REINFORCING MAT 300121391
3	1	4	100004660	PULL IRON OFFSET B783519 3.5H X 19L X.875DIA GALV
4	1	2	100005932	INSERT GROUND BRONZE BOTTLE ROCKET 1/2-13 UNC WITH 11IN COPPER ROD 12H69 W/0.25 ORANGE TOGGLE INSERT
5	1	2	100024063	GROUND CLAMP BRONZE 1/2-1 BLACKBURN TYPE J
6	1	8	100004878	ANCHOR UTILITY .671DIA 5-SLAB GALV P75 5UA671
7	1	20	100003015	TERMINATOR DUCT WITH SEAL 4.5IN T4501
8	1	3	100007286	TERMINATOR DUCT WITH SEAL 3IN T3001

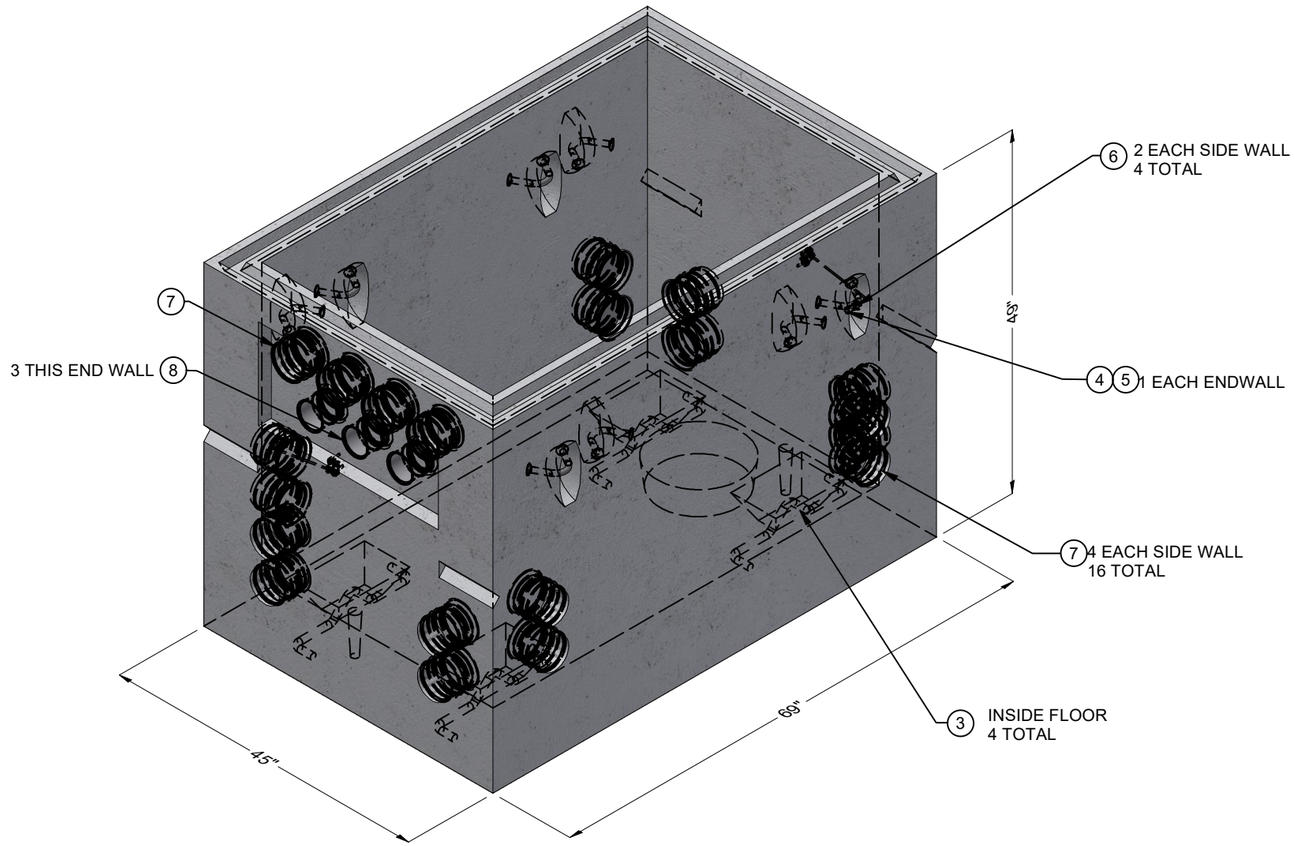

ISO REF

LIFTING NOTES
■ THIS CONCRETE PRODUCT IS DESIGNED TO BE LIFTED AT 2500 PSI WITH 4 LIFT CONNECTIONS EQUALLY LOADED TO 4 LIFTING POINTS AT A MINIMUM 60° SLING ANGLE, MEASURED FROM HORIZONTAL.
*All rigging shall be design by a qualified professional. Loading diagrams show illustrations of possible rigging setups to achieve the required sling angle and load leg equalization. Other valid rigging configurations are possible. A qualified professional must be consulted prior to lifting.

RIGGING DIAGRAM*	C



CHANGE HISTORY			
NO.	DESCRIPTION	DATE	BY
1	INITIAL DRAWING 1905-17329-NCA	5-22-19	EDC
2	PG&E AND CAGE UPDATE	6-7-2021	APS
3	ADDED ADDITIONAL LIFTERS PER PG&E REQUEST	8-18-2021	APS
4	ADDED PAN PER PG&E REQUEST	07-26-2022	APS
5	UPDATED CONCRETE TEXTURE	3-6-2026	KMM
6	SWAPPED SHORT TERM WITH REG	5/28/26	AB

BURY DEPTH:	0.0' - 4.5' to Top		
WATER LEVEL:	2.0'	APPROX. WEIGHT:	5233.48 Lbs
DESIGN SPEC:	ACI 318,ASTM C857	LOADING SPEC:	A-16 (AASHTO HS20-44)
REINFORCEMENT TYPE:	Rebar	LIFTING TYPE:	Dogbone

Infrastructure
JENSEN
WWW.JENSENINFRASTRUCTURE.COM

©2026 Jensen Infrastructure - All rights reserved.
All materials appearing as Jensen Infrastructure documents and the like are proprietary work product and are protected under U.S. copyright and other laws.
Unless in conjunction with business conducted with Jensen Infrastructure , any use of Jensen Infrastructure work product without express, written consent is prohibited, and recipient is prohibited from distributing any and all work product to non-approved third parties under penalty of civil action.
This product shall only be produced in a Jensen Infrastructure facility.

DESCRIPTION:
Vault 3660x42 Rect. Bottom Section Terminators Sump PG&E 04-3361
CASTING LAYOUT


PART NUMBER:	200021364	DRAWN BY:	A.Sprung
CREATED:	5/22/2019	MODIFIED:	5/28/2026

REV: D-5-2


SHEET: 1 OF 2


200021364.idw

FEATURES		
ID	DESCRIPTION	QTY
A	26"(X) x 12"(Y) x 1" Deep Knockout	1
B	7"(X) x 12"(Y) x 1" Deep Knockout	8





DETAIL J



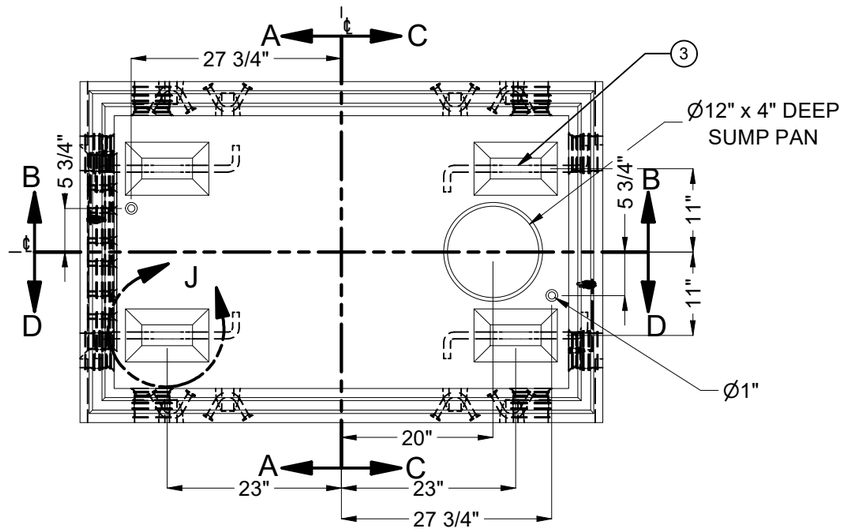


PLAN VIEW

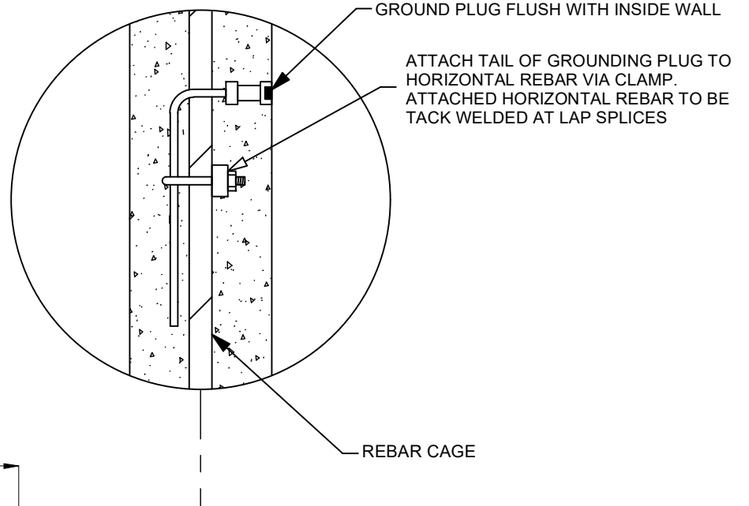


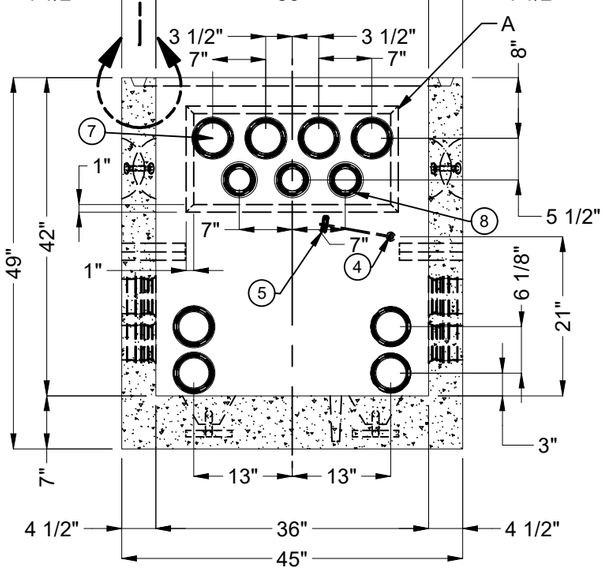


SECTION A-A

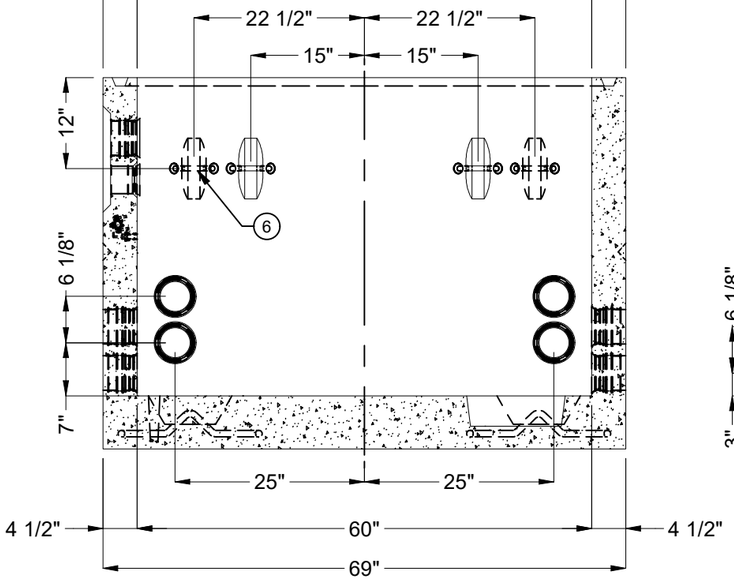

SECTION B-B

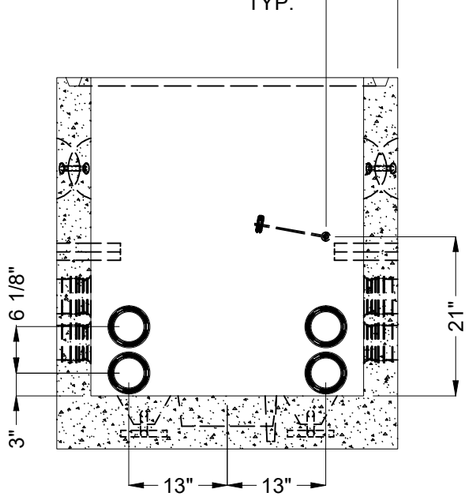

SECTION C-C

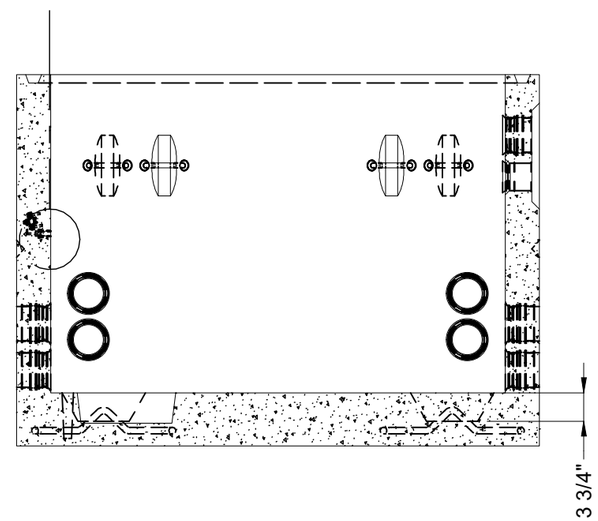

SECTION D-D

BURY DEPTH:	0.0' - 4.5' to Top		
WATER LEVEL:	2.0'	APPROX. WEIGHT:	5233.48 Lbs
DESIGN SPEC:	ACI 318,ASTM C857	LOADING SPEC:	A-16 (AASHTO HS20-44)
REINFORCEMENT TYPE:	Rebar	LIFTING TYPE:	Dogbone

Infrastructure
JENSEN
WWW.JENSENINFRASTRUCTURE.COM

©2026 Jensen Infrastructure - All rights reserved.
All materials appearing as Jensen Infrastructure documents and the like are proprietary work product and are protected under U.S. copyright and other laws.
Unless in conjunction with business conducted with Jensen Infrastructure , any use of Jensen Infrastructure work product without express, written consent is prohibited, and recipient is prohibited from distributing any and all work product to non-approved third parties under penalty of civil action.
This product shall only be produced in a Jensen Infrastructure facility.

DESCRIPTION:	Vault 3660x42 Rect. Bottom Section Terminators Sump PG&E 04-3361 CASTING DRAWING		REV: D-5-2
PART NUMBER:	200021364	DRAWN BY:	A.Sprung
CREATED:	5/22/2019	MODIFIED:	5/28/2026
			SHEET: 2 OF 2

200021364.idw