
NOTES
■ IN COMPLIANCE WITH UNIFORM PLUMBING CODE (UPC), INTERNATIONAL PLUMBING CODE (IPC), ASTM INTERNATIONAL C1613
■ MINIMUM ONE (1) ACCESS OPENING PER COMPARTMENT REQUIRED (AS SHOWN). ADDITIONALACCESS CAN BE ADDED IN LIEU OF PLUG COVER WHEN REQUIRED BY THE AUTHORITY HAVING JURISDICITON.
■ MUST BE INSTALLED PER "JENSEN PRECAST UNDERGROUND WASTEWATER PRECAST CONCRETE TANK INSTALLATION PROCEDURE" WHICH CAN BE FOUND AT https://www.jensenprecast.com/Tank-Installation-Procedure-d2106.pdf. THIS PROCEDURE ADDRESSES REQUIRED EXCAVATION, SITE PREPARATION, INSTALLATION, VENTILATION, AND WATER/VACCUM TESTING


BILL OF MATERIALS

ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	200045214	Tank JP 1500 Gallon 4 Inch Assembly EBE Single Baffle
2	1	200048790	200045217 Plumbing - JP 1500 4 Inch Gravity Grease Interceptor 24"E, 24"B, 24"E Single Baffle Deep Bury
3	JOB SPECIFIC	100005850	CI RINGCOVER 24DIA B-5105-02/B-5105-R2 ASTM A48 CL35B CP O-RING GASKET OSI JENSEN/INTERCEPT
4	JOB SPECIFIC	100001524	Grade Ring D2432x3
5	JOB SPECIFIC	100001525	Grade Ring D2432x6
6	JOB SPECIFIC	100001526	Grade Ring D2432x12
7	JOB SPECIFIC	100012046	Plug Cover D2428x6 Slab Top

200045217.idw

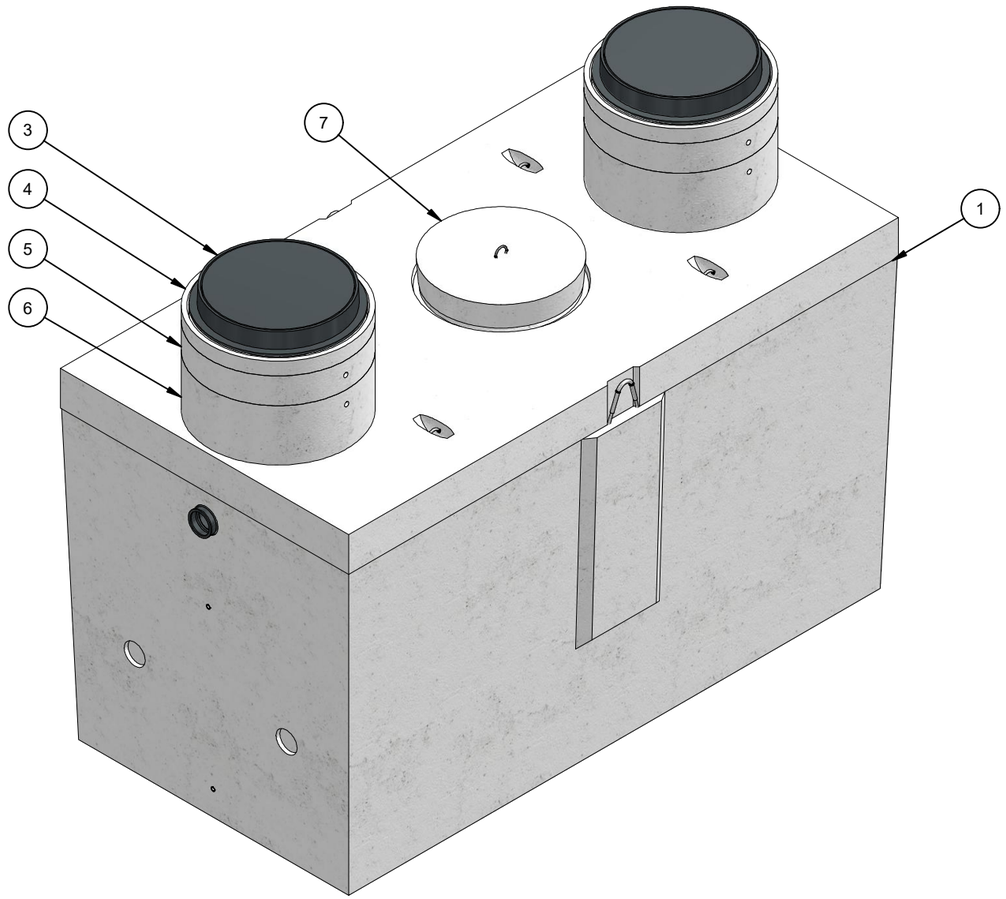

ISO LAYOUT

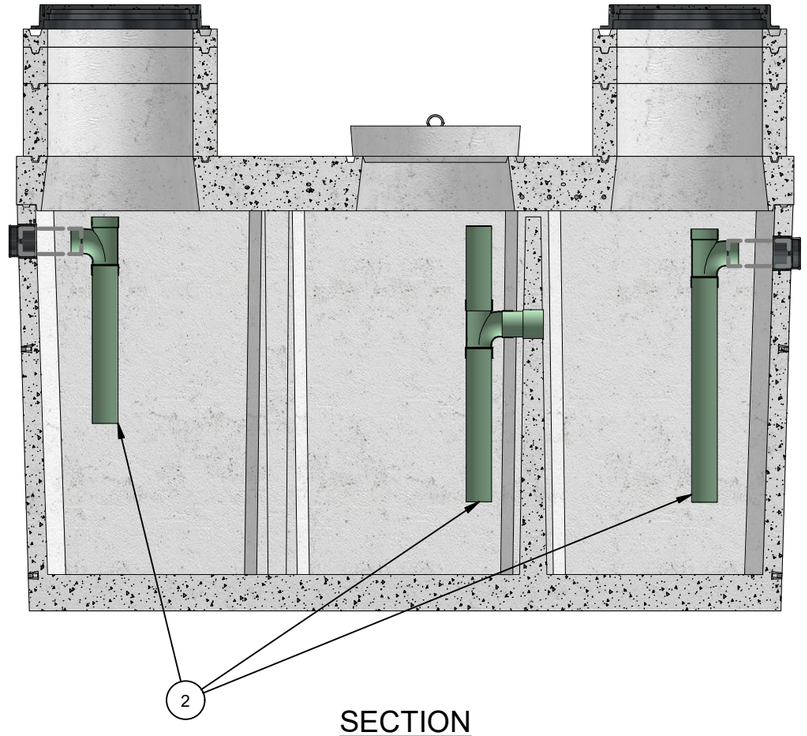

SECTION

CHANGE HISTORY			
NO.	DESCRIPTION	DATE	BY
A	DRAWING CREATED	10/20/2020	MRV
B	TOP SLAB LIFTING AND PLUMBING UPDATED	2/5/2021	C.Keller
C	ACCESSORIES UPDATED	6/29/2022	E.FINE


BURY DEPTH:	1.1' - 10.0' to Top		
WATER LEVEL:	Below Structure	APPROX. WEIGHT:	19133.34 Lbs
DESIGN SPEC:	ASTM C890,ACI 318	LOADING SPEC:	A-16 (AASHTO HS20-44)
AGENCY:		AGENCY SPEC:	

JENSEN PRECAST EST. 1968


WWW.JENSENPRECAST.COM

©2022 Jensen Precast- All rights reserved.
All materials appearing as Jensen Precast documents and the like are proprietary work product and are protected under U.S. copyright and other laws.
Unless in conjunction with business conducted with Jensen Precast, any use of Jensen Precast work product without express, written consent is prohibited, and recipient is prohibited from distributing any and all work product to non-approved third parties under penalty of civil action.

DESCRIPTION:	Tank JP 1500 Gallon 4 Inch Layout Gravity Grease Interceptor 24"E, 24"B, 24"E Single Baffle LAYOUT REVIEW		REV: C-2
PART NUMBER:	200045217	DRAWN BY:	E. Fine
CREATED:	10/20/2020	MODIFIED:	6/29/2022
			SHEET: 1 OF 2

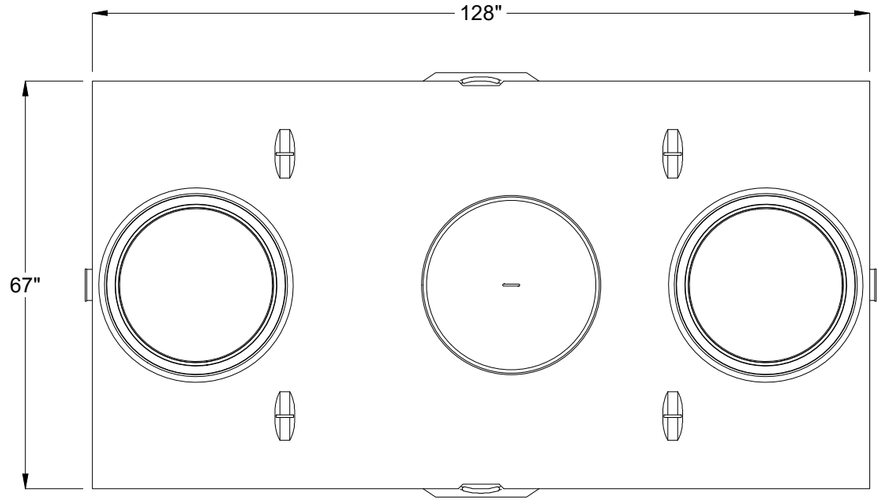

PLAN VIEW

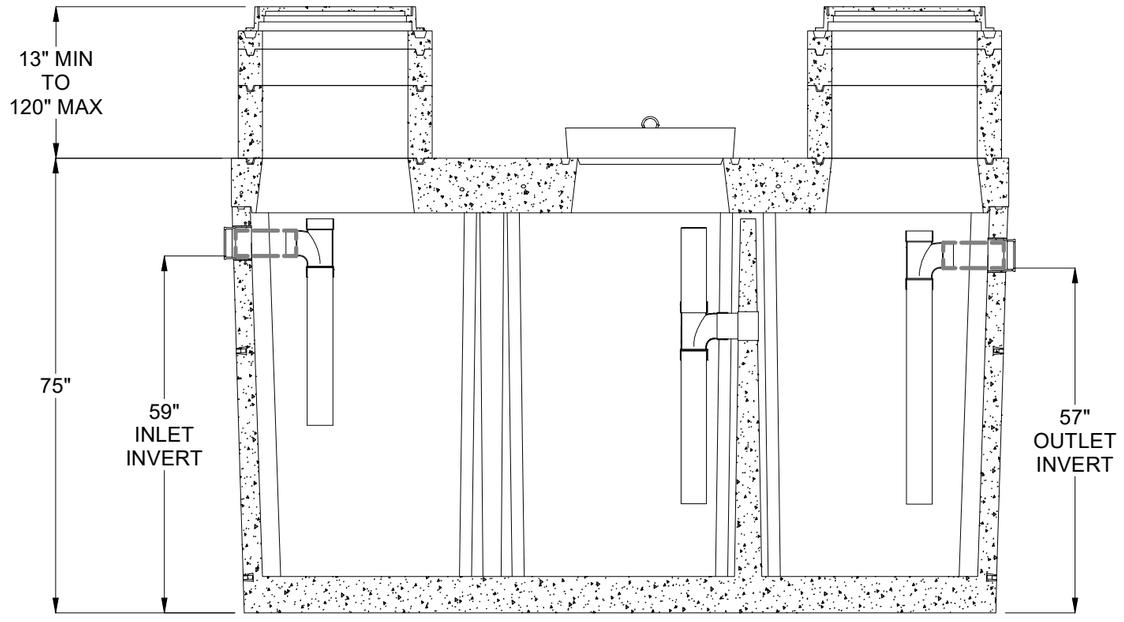

SECTION

BURY DEPTH:	1.1' - 10.0' to Top		
WATER LEVEL:	Below Structure	APPROX. WEIGHT:	19133.34 Lbs
DESIGN SPEC:	ASTM C890,ACI 318	LOADING SPEC:	A-16 (AASHTO HS20-44)
AGENCY:		AGENCY SPEC:	

JENSEN PRECAST EST. 1968

WWW.JENSENPRECAST.COM

©2022 Jensen Precast- All rights reserved.
All materials appearing as Jensen Precast documents and the like are proprietary work product and are protected under U.S. copyright and other laws.
Unless in conjunction with business conducted with Jensen Precast, any use of Jensen Precast work product without express, written consent is prohibited, and recipient is prohibited from distributing any and all work product to non-approved third parties under penalty of civil action.

DESCRIPTION: Tank JP 1500 Gallon 4 Inch Layout Gravity Grease Interceptor 24"E, 24"B, 24"E Single Baffle

LAYOUT DRAWING

PART NUMBER:	200045217	DRAWN BY:	E. Fine
CREATED:	10/20/2020	MODIFIED:	6/29/2022

REV: C-2

SHEET: 2 OF 2

200045217.idw