

DESIGN NOTES
■ DESIGNED IN ACCORDANCE WITH ASTM C478
■ FOR COMPLETE DESIGN AND PRODUCT INFORMATION CONTACT JENSEN PRECAST.

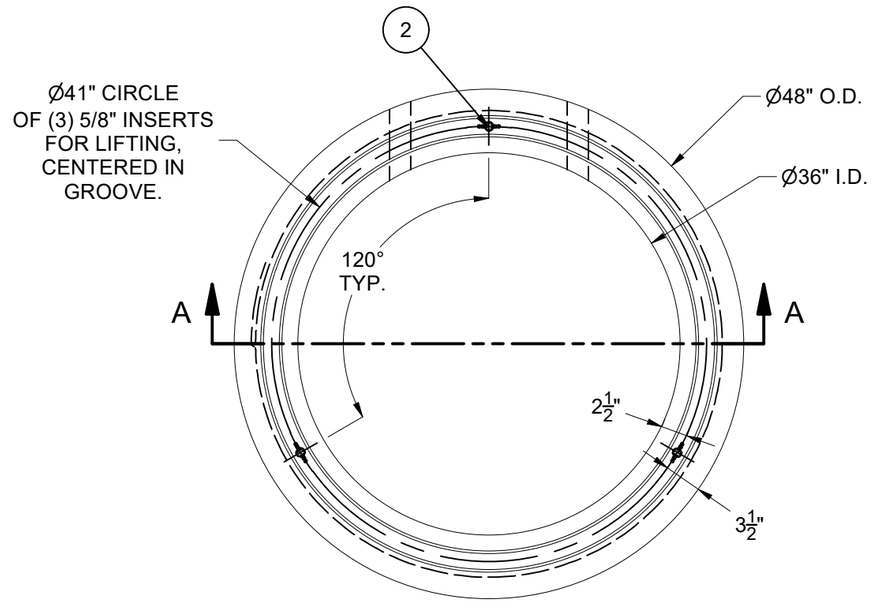


PLAN VIEW

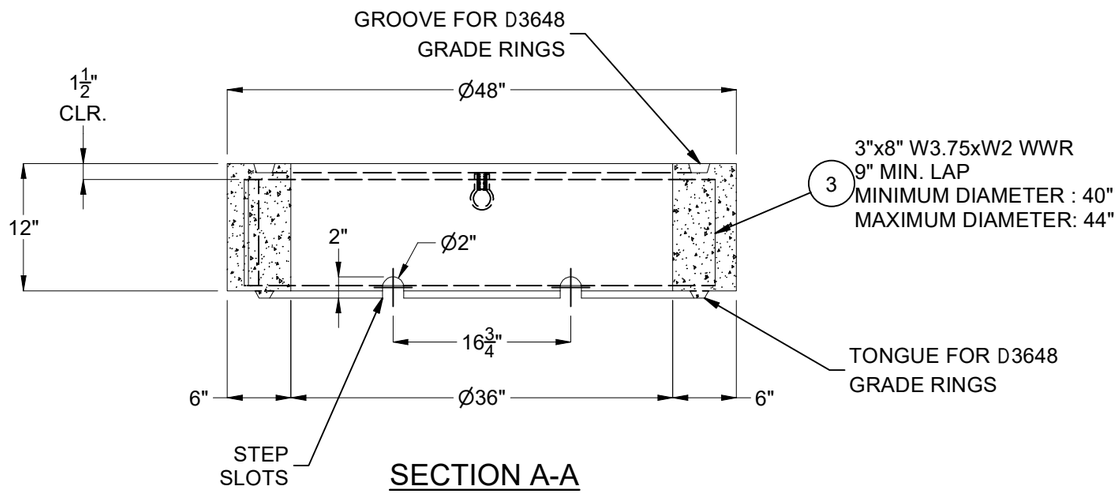

SECTION A-A

BILL OF MATERIALS

ITEM	UNIT QTY	QTY	PART NUMBER	DESCRIPTION
1	5.434 ft^3	5.434 ft^3	100011428	CONCRETE MIX GENERIC 6500 PSI
2	1	3	100002766	INSERT FERRULE LOOP 5/8 X 3-1/2 PLATED FX-5
3	1	1	200048283	REINFORCING MAT 200048283

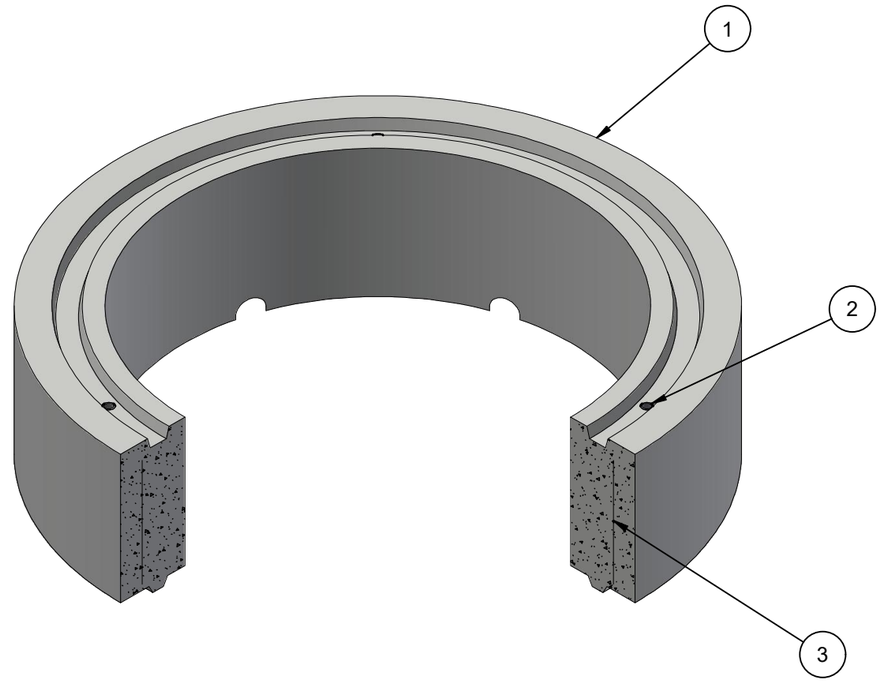

ISO SECTION VIEW

200048284.idw

LIFTING NOTES
■ THIS CONCRETE PRODUCT IS DESIGNED TO BE LIFTED AT 2500 PSI WITH 3 LIFT CONNECTIONS EQUALLY LOADED TO 3 LIFTING POINTS AT A MINIMUM 60° SLING ANGLE, MEASURED FROM HORIZONTAL.

BURY DEPTH:	0.3' - 30.0' to Top of Section		
WATER LEVEL:	0.0'	WEIGHT:	817.38 Lbs
DESIGN SPEC:	ASTM C478	LOADING SPEC:	N/A
AGENCY:		AGENCY SPEC:	

JENSEN PRECAST EST. 1968

WWW.JENSENPRECAST.COM

©2018 Jensen Precast- All rights reserved.
All materials appearing as Jensen Precast documents and the like are proprietary work product and are protected under U.S. copyright and other laws.
Unless in conjunction with business conducted with Jensen Precast, any use of Jensen Precast work product without express, written consent is prohibited, and recipient is prohibited from distributing any and all work product to non-approved third parties under penalty of civil action.

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
A-1		6/8/2018	

DESCRIPTION:	Grade Ring D3648x12 GU Step Slots LAYOUT REVIEW		REV: A-1
PART NUMBER:	200048284	DRAWN BY:	B. McConnell
CREATED:	1/25/2021	MODIFIED:	2/8/2021
			SHEET: 1 OF 1