
| DESIGN NOTES |
|---|
| ■ FOR COMPLETE DESIGN AND PRODUCT INFORMATION CONTACT JENSEN PRECAST. |

## BILL OF MATERIALS

| ITEM | UNIT QTY | QTY | PART NUMBER | DESCRIPTION |
|---|---|---|---|---|
| 1 | 1 | 1 | 200075985 | Tank JOP 4000 Gallon 4-6 Inch Oval Bottom Section Double Baffle Recess |
| 2 | 1 | 1 | 200075972 | Vertical Slab Baffle JOP 4000 6 Inch |
| 3 | 1 | 2 | 100002698 | PIPE FITTING PVC SDR35 SAN TEE 6DIA |
| 4 | 1 | 1 | 100002710 | FITTING PVC SDR35 6IN DIA 90 DEG ELBOW ASTM D-3034 SOLVENT WELD SEWER DRAIN |
| 5 | *Varies* | 35.000 in | 100002511 | PIPE PVC 6IN DIA SDR35 ASTM D-3034 SOLVENT WELD SEWER DRAIN |

200080562.idw

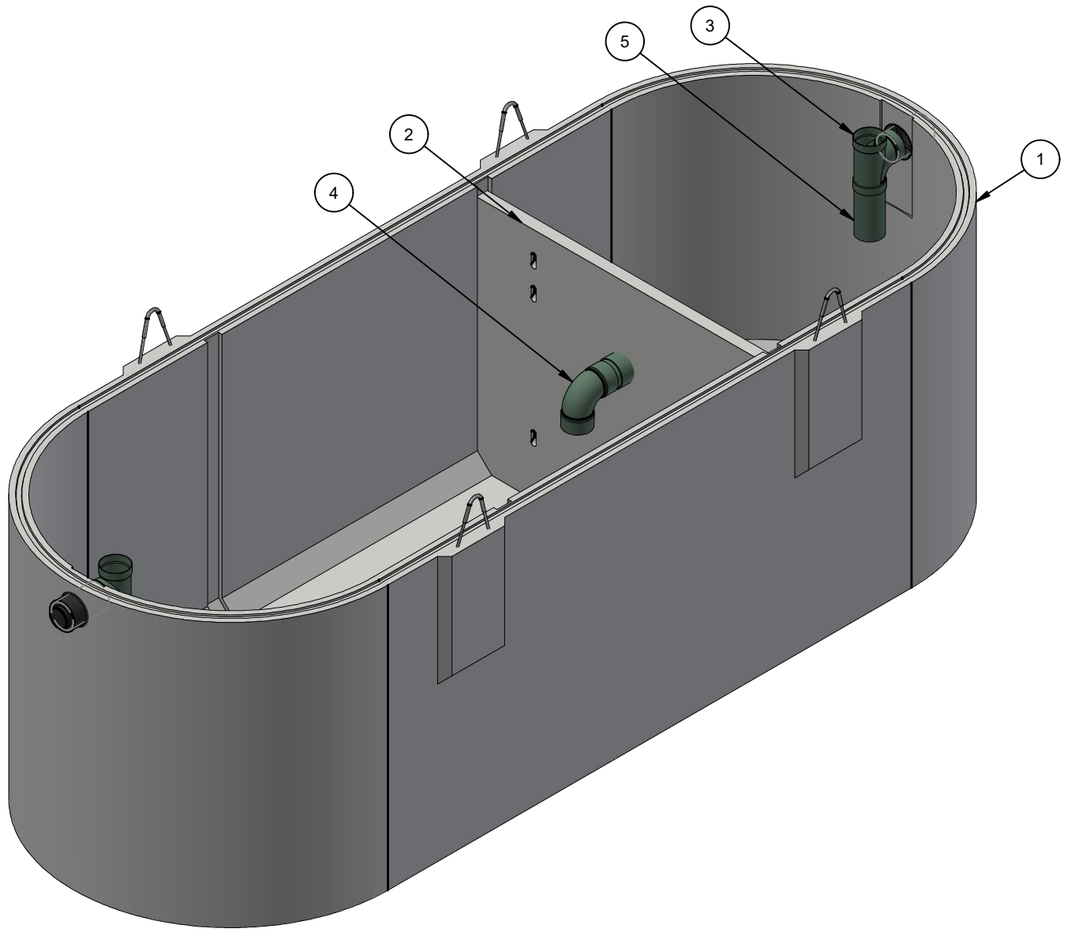


ISO VIEW

# MODEL: JOP-4000-EBE-ST

| LIFTING NOTES |
|---|
| ■ THIS CONCRETE PRODUCT IS DESIGNED TO BE LIFTED AT 2500 PSI WITH 4 LIFT CONNECTIONS EQUALLY LOADED TO 4 LIFTING POINTS AT A MINIMUM 90° SLING ANGLE, MEASURED FROM HORIZONTAL. |

| | | | |
|---|---|---|---|
| BURY DEPTH: | 1.7' - 5.6' to Top | | |
| WATER LEVEL: | Below Structure | APPROX. WEIGHT: | 25022.92 Lbs |
| DESIGN SPEC: | ACI 318,ASTM C890 | LOADING SPEC: | A-16 (AASHTO HS20-44) |
| AGENCY: | | AGENCY SPEC: | |


JENSEN PRECAST EST. 1968

WWW.JENSENPRECAST.COM


©2024 Jensen Precast- All rights reserved.
All materials appearing as Jensen Precast documents and the like are proprietary work product and are protected under U.S. copyright and other laws.
Unless in conjunction with business conducted with Jensen Precast, any use of Jensen Precast work product without express, written consent is prohibited, and recipient is prohibited from distributing any and all work product to non-approved third parties under penalty of civil action.

| CHANGE HISTORY | | | |
|---|---|---|---|
| NO. | DESCRIPTION | DATE | BY |
| 1 | 2311-56180 | 11/30/23 | MGL |


| | | | |
|---|---|---|---|
| DESCRIPTION: | Tank JOP 4000 Gallon 6 Inch Assembly Septic Single Baffle<br>LAYOUT REVIEW | | REV: A-3 |
| PART NUMBER: | 200080562 | DRAWN BY: | M. Lincoln |
| CREATED: | 10/6/2023 | MODIFIED: | 1/3/2024 |
| | | | SHEET: 1 OF 2 |

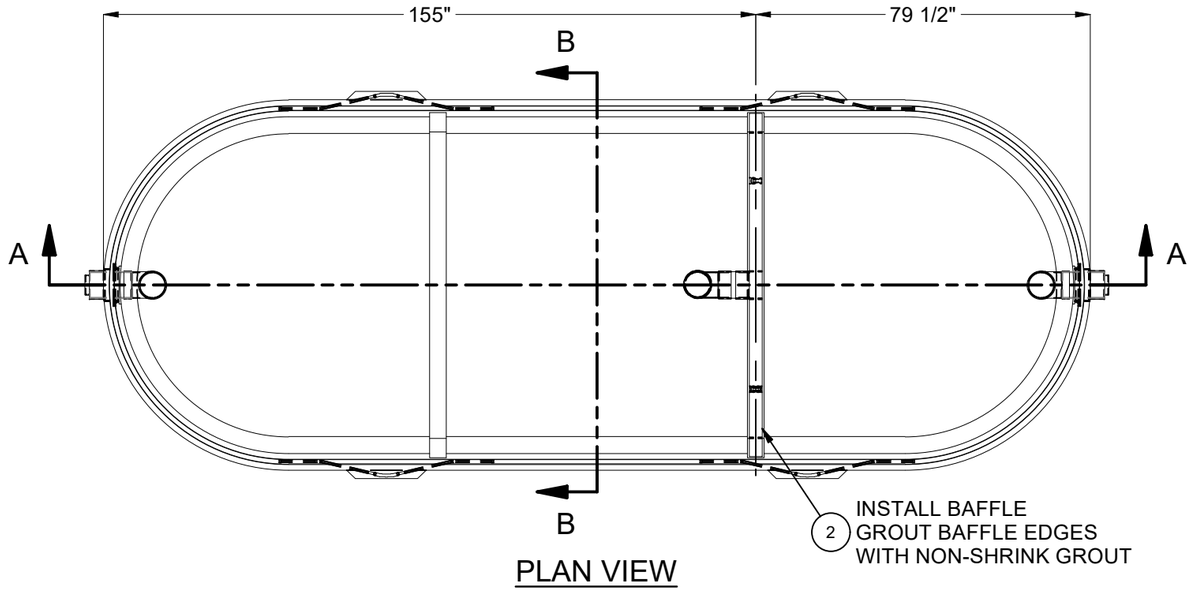


PLAN VIEW

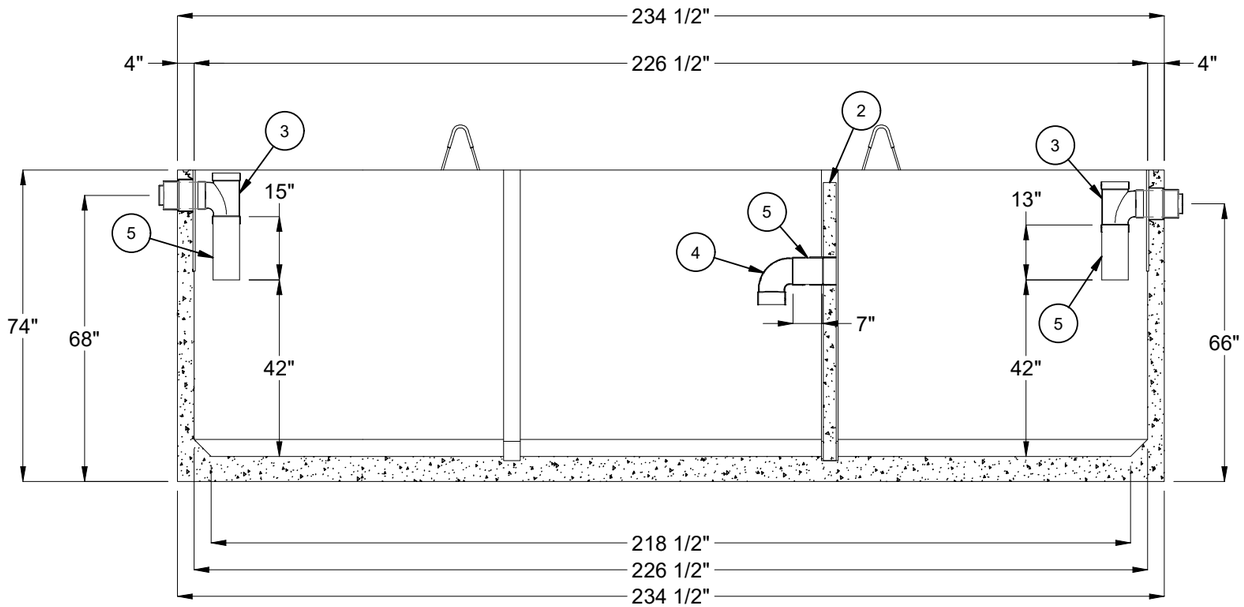


SECTION A-A

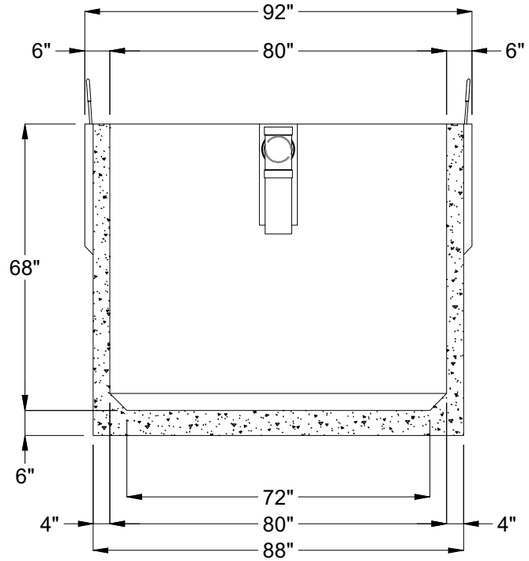


SECTION B-B

| | | | |
|---|---|---|---|
| BURY DEPTH: | 1.7' - 5.6' to Top | | |
| WATER LEVEL: | Below Structure | APPROX. WEIGHT: | 25022.92 Lbs |
| DESIGN SPEC: | ACI 318,ASTM C890 | LOADING SPEC: | A-16 (AASHTO HS20-44) |
| AGENCY: | | AGENCY SPEC: | |

JENSEN PRECAST EST. 1968

WWW.JENSENPRECAST.COM

©2024 Jensen Precast- All rights reserved.
All materials appearing as Jensen Precast documents and the like are proprietary work product and are protected under U.S. copyright and other laws.
Unless in conjunction with business conducted with Jensen Precast, any use of Jensen Precast work product without express, written consent is prohibited, and recipient is prohibited from distributing any and all work product to non-approved third parties under penalty of civil action.

| | | | |
|---|---|---|---|
| DESCRIPTION: | Tank JOP 4000 Gallon 6 Inch Assembly Septic Single Baffle<br>LAYOUT DRAWING | | REV: A-3 |
| PART NUMBER: | 200080562 | DRAWN BY: | M. Lincoln |
| CREATED: | 10/6/2023 | MODIFIED: | 1/3/2024 |
| | | | SHEET: 2 OF 2 |

200080562.idw