

DESIGN NOTES
■ DESIGNED IN ACCORDANCE WITH AASHTO HS20-44 TRAFFIC BRIDGE LOADING USING 4,000 PSI COMPRESSIVE STRENGTH CONCRETE AND 60,000 PSI YIELD STRENGTH ASTM A-706 STEEL REINFORCEMENT.
■ ALL PARTS TO BE STENCILED: MFG DATE / JOB NUMBER / PRODUCT ID / WEIGHT.

BILL OF MATERIALS


ITEM	UNIT QTY	QTY	PART NUMBER	DESCRIPTION
1	1.320 ft^3	1.320 ft^3	100043265	CONCRETE 4000 PSI DRYCAST DRAIN BOX SITE-112
2	1	2	100044531	REINF HOOP STEEL #4 REBAR 42DIA

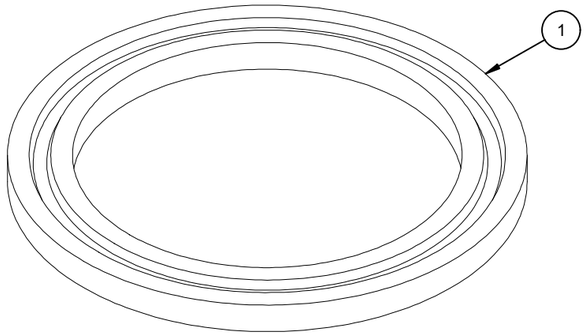


ISO VIEW

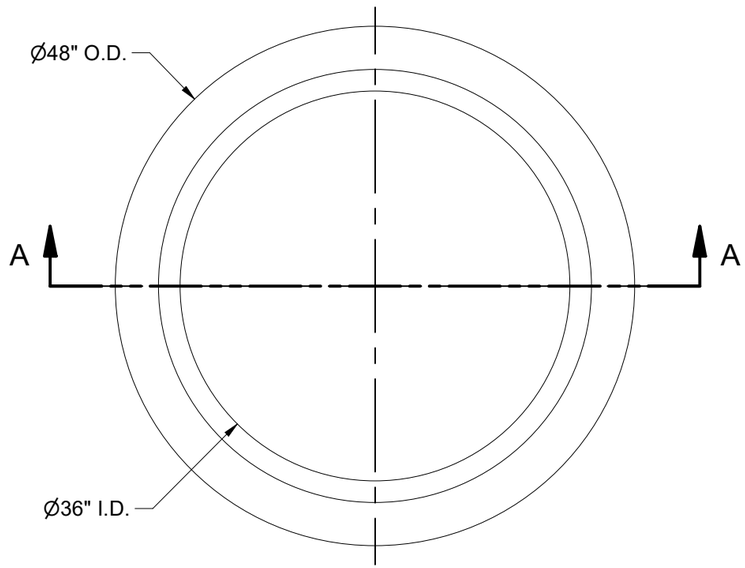

PLAN VIEW

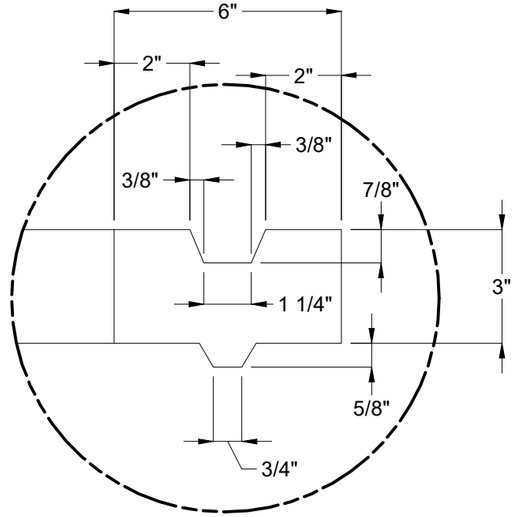

DETAIL B
(JOINT DETAIL)

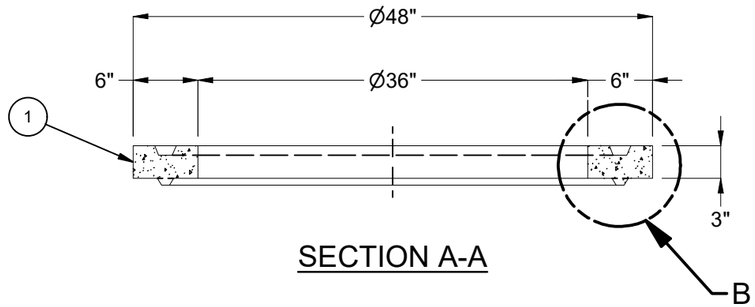

SECTION A-A

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
A-2-1	INITIAL RELEASE	2/24/2026	

BURY DEPTH:	0.0' - 3.0' to Top		
WATER LEVEL:	Below Structure	APPROX. WEIGHT:	198.22 Lbs
DESIGN SPEC:	ACI 318,ASTM C478	LOADING SPEC:	A-16 (AASHTO HS20-44)
REINFORCEMENT TYPE:	Deformed Wire	LIFTING TYPE:	None

Infrastructure
JENSEN
WWW.JENSENINFRASTRUCTURE.COM

©2026 Jensen Infrastructure - All rights reserved.
All materials appearing as Jensen Infrastructure documents and the like are proprietary work product and are protected under U.S. copyright and other laws.
Unless in conjunction with business conducted with Jensen Infrastructure , any use of Jensen Infrastructure work product without express, written consent is prohibited, and recipient is prohibited from distributing any and all work product to non-approved third parties under penalty of civil action.
This product shall only be produced in a Jensen Infrastructure facility.

DESCRIPTION:	Grade Ring D3648x3 SW Joint CASTING LAYOUT		REV: A-2-1
PART NUMBER:	200080805	DRAWN BY:	M. Zaragoza
CREATED:	5/30/2025	MODIFIED:	2/24/2026
			SHEET: 1 OF 1

200080805.idw