
DESIGN NOTES
■ DESIGNED IN ACCORDANCE WITH AASHTO HS20-44 TRAFFIC BRIDGE LOADING USING 5,500 PSI COMPRESSIVE STRENGTH CONCRETE AND 60,000 PSI YIELD STRENGTH ASTM A-706 STEEL REINFORCEMENT PER CALCS. #30500.
■ PAD CONCRETE LOAD DESIGNATION A-0.3 (300 PSF) PARKWAY LOADING/30,000 LB TRANSFORMER.
■ COVER DESIGNED FOR PARKWAY LOADING.
■ FINISH COATING: ALL INTERIOR WALLS AND CEILING SHALL BE PAINTED WHITE.
■ SWITCH ENCLOSURE TO BE PLACED ON A MIN. 6" BASE OF CRUSHER RUN FOR EASE OF INSTALLATION AND EVEN LOAD DISTRIBUTION.
■ MINIMUM EXCAVATION SIZE 7'-6" x 11'-0" x DEPTH REQ'D.
■ FOR COMPLETE DESIGN AND PRODUCT INFORMATION CONTACT JENSEN PRECAST.
■ ALL PARTS TO BE STENCILED: MFG DATE / JOB NUMBER / PRODUCT ID / WEIGHT.

BILL OF MATERIALS

ITEM	UNIT QTY	QTY	PART NUMBER	DESCRIPTION	MASS (lb)
1	1	1	200097229	Vault 60102x61 Rect. Bottom Section Terminators Sump Moreno Valley	14896
2	1	1	200012607	Pad 120144x8 30"x48"E Edison UGS SS535, SB-3	10073
3	1	1	100007043	COVER 3048 POLYMER MVU	190
4	1	6	100008105	PENTA BOLT 1/2-13 UNC 2-1/2 304SS W/CAPWASH	
5	1	1	100006783	SUMP COVER FOR 13IN GALV DIA PLATE	
6	1.000 gal	1.000 gal	100006420	COATING PAINT LATEX WHITE	
7	1.000 ul	1.000 ul	100005749	SEALANT JOINT BUTYL RUBBER ASTM C-990 AND M198 CS-102 1IN EQUIV X14.5FT PER BOX 118FT	

200097228.idw

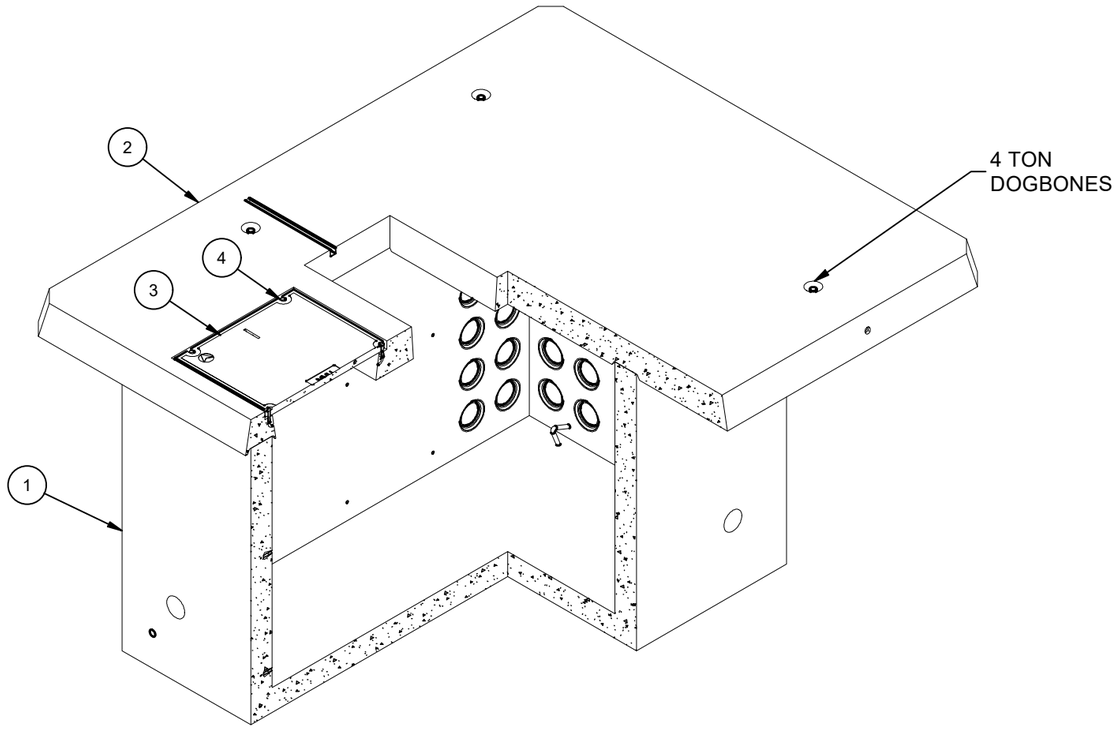

ISOMETRIC VIEW

LIFTING NOTES
■ FIELD INSTALLATION: PLANT DEMOLDING: MINIMUM HANDLING CONCRETE STRENGTH F'c = 5500 PSI RIGGING EQUALIZER REQUIRED TO EQUALIZE LOAD TO 4 LIFTING POINTS WITH A SLING ANGLE BETWEEN 60° AND 90°

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
A-1	INITIAL RELEASE	1/27/2025	


BURY DEPTH:	-0.3' - -0.3' to Top		
WATER LEVEL:	3.0'	APPROX. WEIGHT:	25174.39 Lbs
DESIGN SPEC:	ACI 318,ASTM C857	LOADING SPEC:	A-16 (AASHTO HS20-44)
AGENCY:	Moreno Valley	AGENCY SPEC:	

JENSEN PRECAST EST. 1968


WWW.JENSENPRECAST.COM

©2025 Jensen Precast- All rights reserved.
All materials appearing as Jensen Precast documents and the like are proprietary work product and are protected under U.S. copyright and other laws.
Unless in conjunction with business conducted with Jensen Precast, any use of Jensen Precast work product without express, written consent is prohibited, and recipient is prohibited from distributing any and all work product to non-approved third parties under penalty of civil action.
This product shall only be produced in a Jensen Precast facility.


DESCRIPTION:	Slab Box Layout 60102x60 Terminators Sump 30"x48"E Moreno Valley Int. Paint - White Latex LAYOUT REVIEW		REV: A-1
PART NUMBER:	200097228	DRAWN BY:	S. Rodarte
CREATED:	1/17/2025	MODIFIED:	1/27/2025
			SHEET: 1 OF 2

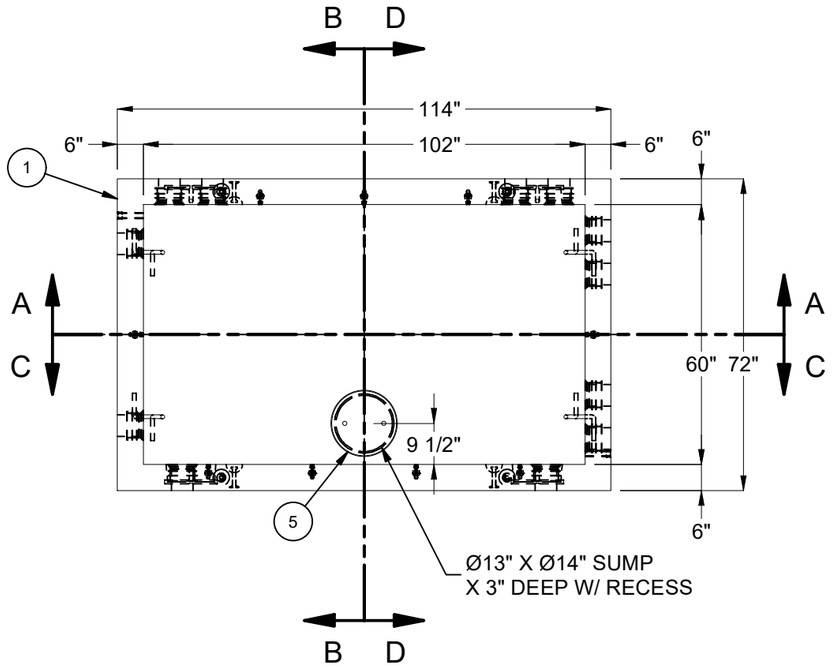


PLAN VIEW

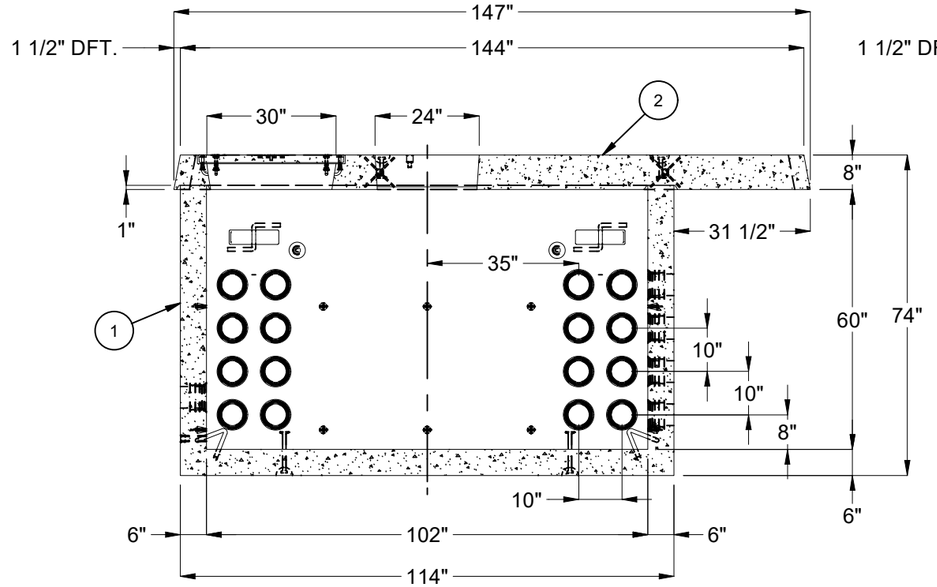


SECTION A-A

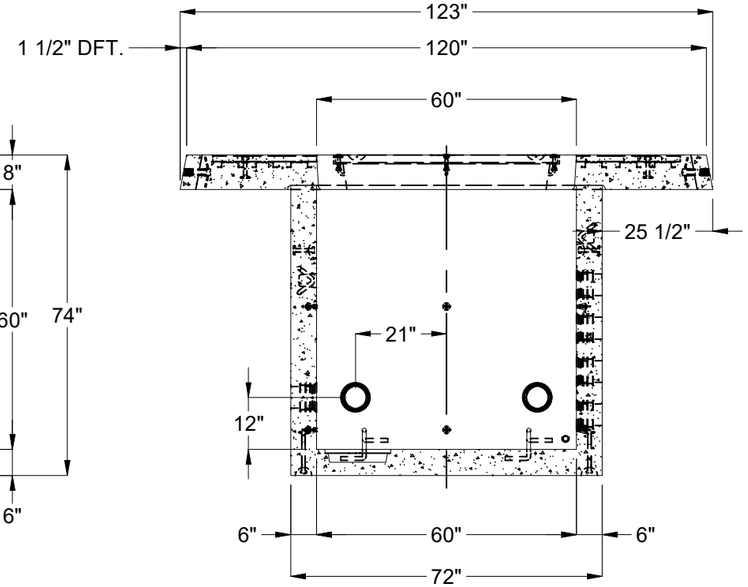


SECTION B-B

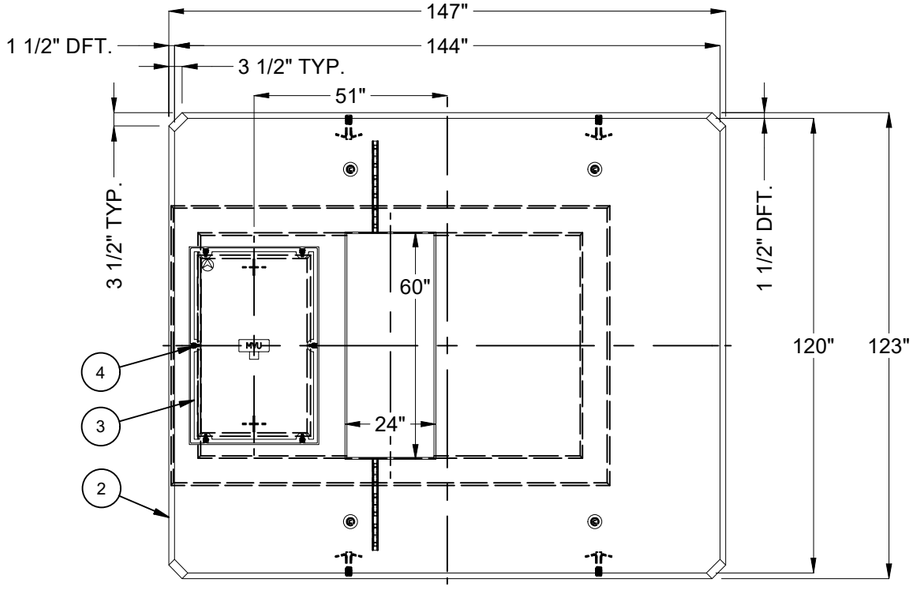

PLAN VIEW OF TRANSFORMER PAD

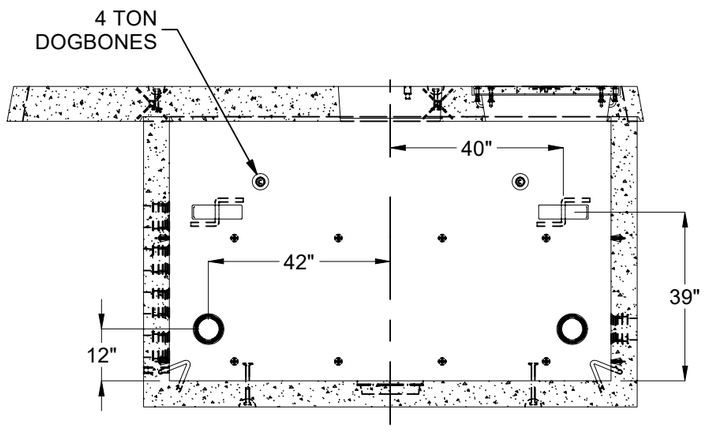

SECTION C-C

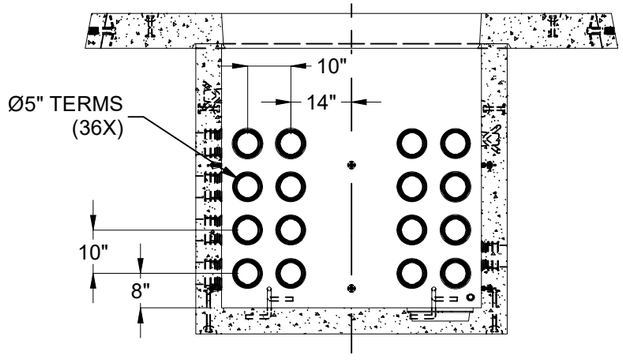

SECTION D-D

BURY DEPTH:	-0.3' - -0.3' to Top		
WATER LEVEL:	3.0'	APPROX. WEIGHT:	25174.39 Lbs
DESIGN SPEC:	ACI 318,ASTM C857	LOADING SPEC:	A-16 (AASHTO HS20-44)
AGENCY:	Moreno Valley	AGENCY SPEC:	

JENSEN PRECAST EST. 1968

WWW.JENSENPRECAST.COM

©2025 Jensen Precast- All rights reserved.
All materials appearing as Jensen Precast documents and the like are proprietary work product and are protected under U.S. copyright and other laws.
Unless in conjunction with business conducted with Jensen Precast, any use of Jensen Precast work product without express, written consent is prohibited, and recipient is prohibited from distributing any and all work product to non-approved third parties under penalty of civil action.
This product shall only be produced in a Jensen Precast facility.

DESCRIPTION:	Slab Box Layout 60102x60 Terminators Sump 30"x48"E Moreno Valley Int. Paint - White Latex LAYOUT DRAWING		REV: A-1
PART NUMBER:	200097228	DRAWN BY:	S. Rodarte
CREATED:	1/17/2025	MODIFIED:	1/27/2025

SHEET: 2 OF 2

200097228.idw