

NOTES
■ FOR COMPLETE DESIGN AND PRODUCT INFORMATION CONTACT JENSEN PRECAST.

BILL OF MATERIALS


ITEM	UNIT QTY	QTY	PART NUMBER	DESCRIPTION
1	2.747 ft^3	2.747 ft^3	100011425	CONCRETE MIX GENERIC 5000 PSI
2	1	3	100002766	INSERT FERRULE LOOP 5/8 X 3-1/2 PLATED FX-5
3	1	1	100002392	REINF HOOP STEEL .25235DIA GA 42DIA

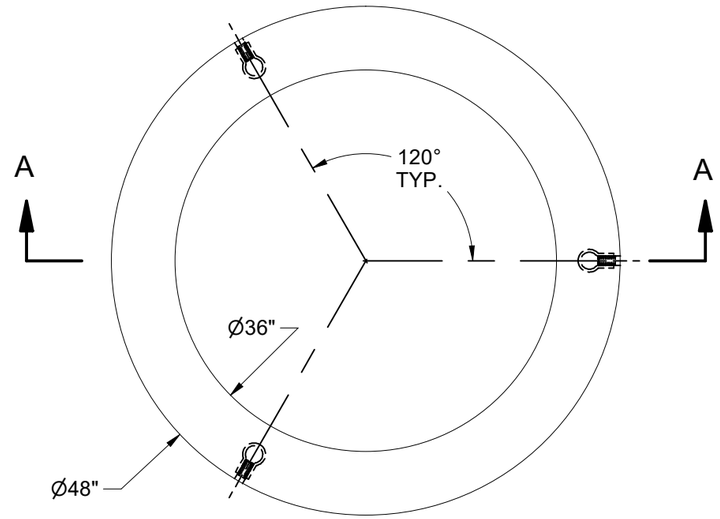

PLAN VIEW

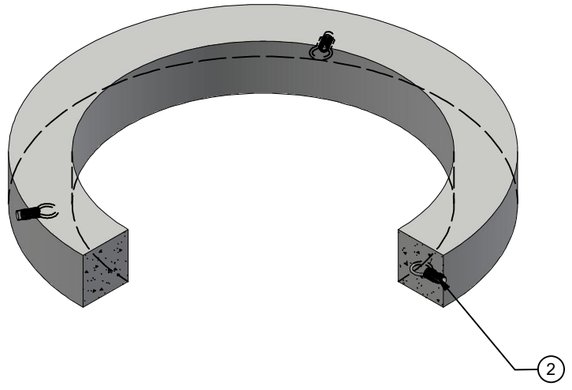

ISO REF

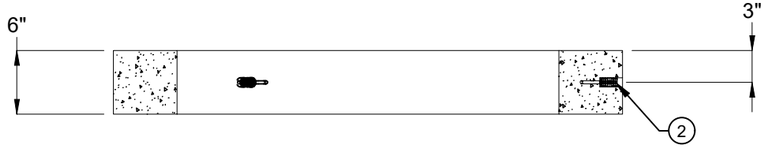

SECTION A-A

LIFTING NOTES
■ THIS CONCRETE PRODUCT IS DESIGNED TO BE LIFTED AT 2500PSI WITH 3 LIFT CONNECTIONS EQUALLY LOADED TO 3 LIFTING POINTS AT A MINIMUM 60° SLING ANGLE, MEASURED FROM HORIZONTAL.

BURY DEPTH:	0.0' - 99.0' to Top		
WATER LEVEL:	Agency Specified	APPROX. WEIGHT:	415.36 Lbs
DESIGN SPEC:	ASTM C478	LOADING SPEC:	A-16 (AASHTO HS20-44)
REINFORCEMENT TYPE:	WWR Plain	LIFTING TYPE:	Insert

JENSEN PRECAST EST. 1968

WWW.JENSENPRECAST.COM

©2021 Jensen Precast- All rights reserved.
All materials appearing as Jensen Precast documents and the like are proprietary work product and are protected under U.S. copyright and other laws.
Unless in conjunction with business conducted with Jensen Precast, any use of Jensen Precast work product without express, written consent is prohibited, and recipient is prohibited from distributing any and all work product to non-approved third parties under penalty of civil action.

CHANGE HISTORY

NO.	DESCRIPTION	DATE	BY
1	2103-50607 TEP 612	04-20-21	DCH

DESCRIPTION:	Grade Ring D3648x6 Flat CASTING LAYOUT		REV: A-4
PART NUMBER:	200051908	DRAWN BY: MLR	SHEET: 1 OF 1
CREATED:	12/19/2016	MODIFIED: 5/3/2021	

200051908.idw