
DESIGN NOTES
■ ALL PARTS TO BE STENCILED: MFG DATE / JOB NUMBER / PRODUCT ID / WEIGHT.


BILL OF MATERIALS

ITEM	UNIT QTY	QTY	PART NUMBER	DESCRIPTION
1	1.676 ft^3	1.676 ft^3	100037806	CONCRETE 6000 PSI WETCAST #87 SCC W/ FLY ASH 5%-6% AIR SDGE FONT
2	1	1	100006680	FAS-2436-CD-G-FONT-OH03-(F2436-PB-ANG)
3	1	3	100002867	ANCHOR DOGBONE P52 2T X 3-3/8" GALV
4	1	2	100002776	INSERT FERRULE LOOP 3/8 X 2-3/4 SS FX-5
5	1	4	100008114	INSERT THREADED METAL 1/2-13 UNC 1-1/2 IN OPEN
6	1	1	100008132	RFI PLASTIC TAG IDENCIA
7	1	1	100017866	REINFORCING LOOP 100017866


200055856.idw

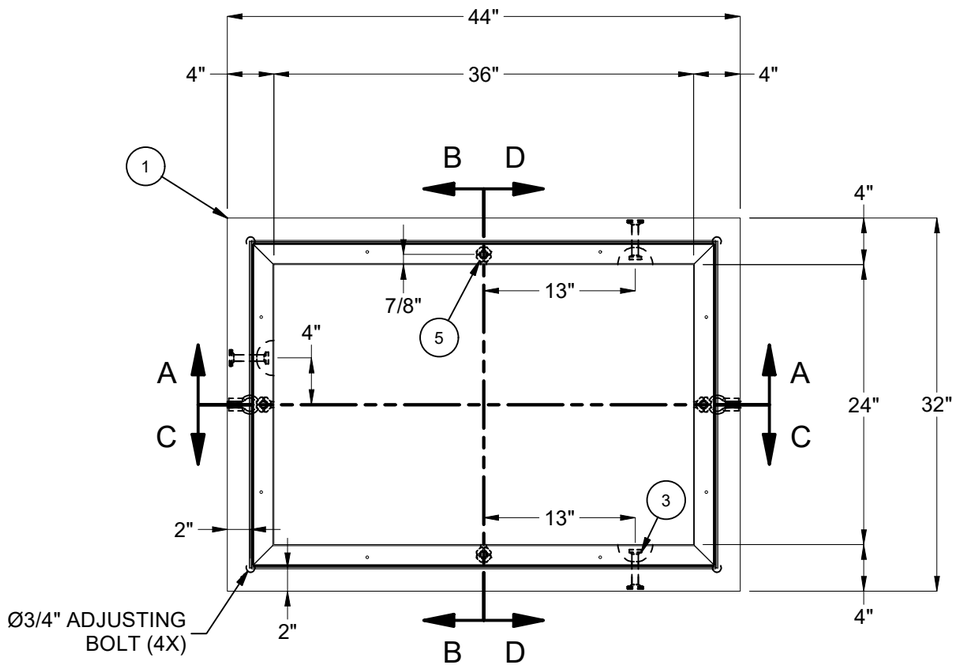


PLAN VIEW

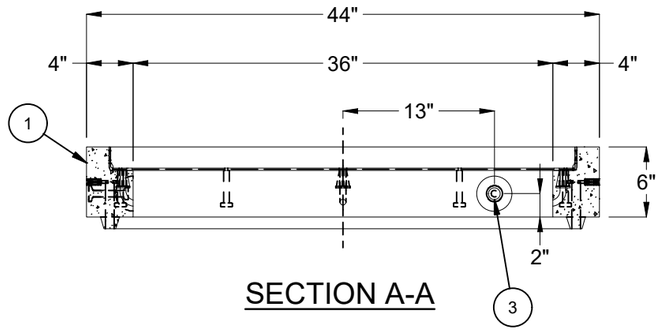


SECTION A-A

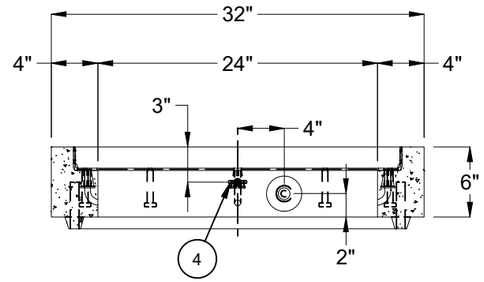

SECTION B-B

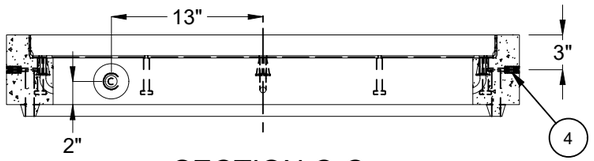

SECTION C-C

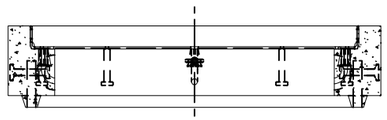

SECTION D-D

LIFTING NOTES
■ DEMOLDING: THIS CONCRETE PRODUCT IS DESIGNED TO BE LIFTED AT 2,500 PSI WITH 3 LIFT CONNECTIONS EQUALLY LOADED TO 1 LIFTING POINTS AT A MINIMUM 60° SLING ANGLE, MEASURED FROM HORIZONTAL.
■ INSTALLATION: THIS CONCRETE PRODUCT IS DESIGNED TO BE LIFTED AT 5,500 PSI WITH 3 LIFT CONNECTIONS EQUALLY LOADED TO 1 LIFTING POINTS AT A MINIMUM 60° SLING ANGLE, MEASURED FROM HORIZONTAL.

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
A-1	INITIAL RELEASE	10/14/2021	

BURY DEPTH:	0.0' - 0.0' to Top		
WATER LEVEL:	3.0'	WEIGHT:	281.35 Lbs
DESIGN SPEC:	ASTM C857,ACI 318	LOADING SPEC:	A-16 (AASHTO HS20-44)
REINFORCEMENT TYPE:	Rebar	LIFTING TYPE:	Dogbone

JENSEN PRECAST EST. 1968

WWW.JENSENPRECAST.COM

©2019 Jensen Precast- All rights reserved.
All materials appearing as Jensen Precast documents and the like are proprietary work product and are protected under U.S. copyright and other laws.
Unless in conjunction with business conducted with Jensen Precast, any use of Jensen Precast work product without express, written consent is prohibited, and recipient is prohibited from distributing any and all work product to non-approved third parties under penalty of civil action.

DESCRIPTION:	Riser 2436x6 Rect. Riser Cast-In Frame SDGE CASTING LAYOUT		REV: A-1
PART NUMBER:	200055856	DRAWN BY:	J. Prado
CREATED:	8/31/2021	MODIFIED:	10/14/2021
			SHEET: 1 OF 1