NOTES
■ ALL PARTS TO BE STENCILED: MFG DATE / JOB NUMBER / PRODUCT ID / WEIGHT.

BILL OF MATERIALS

ITEM	UNIT QTY	QTY	PART NUMBER	DESCRIPTION
1	35.179 ft^3	35.179 ft^3	100006029	CONCRETE 5500 PSI SCC ED
2	1	1	100006689	FRAME 3048 ANGLE GALV
3	1	4	100002874	ANCHOR DOGBONE P52 4T X 4-3/4" GALV
4	1	6	100008114	INSERT THREADED METAL 1/2-13 UNC 1-1/2 IN OPEN
5	1	1	100008132	RFI PLASTIC TAG IDENCIA
6	1	8	100003035	STRUT FITTING END CAP P3280 PLAIN
7	4.000 in	16.000 in	100024619	STRUT C-CHANNEL CONCRETE INSERT 1-5/8 X 1-5/8 12GA W/ANCHORS GALV
8	1	1	300128788	REINFORCING MAT 300128788

200057681.idw

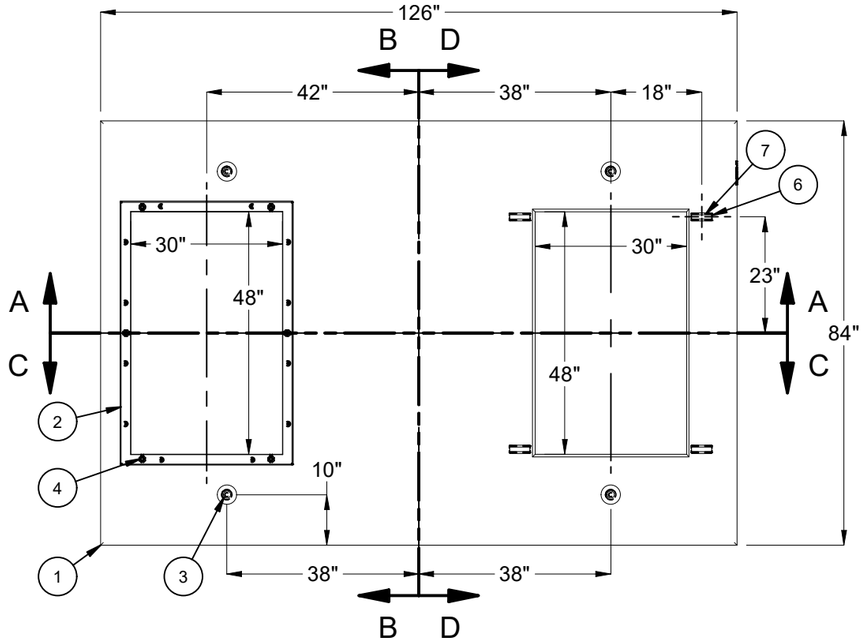

PLAN VIEW

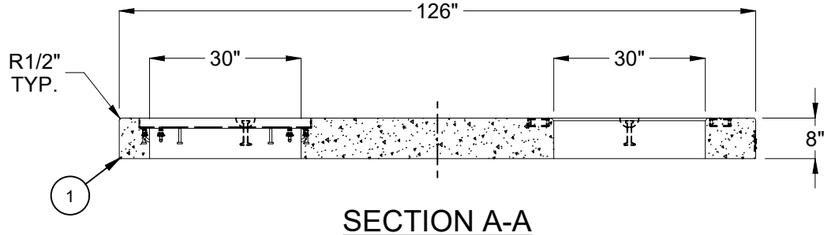

SECTION A-A

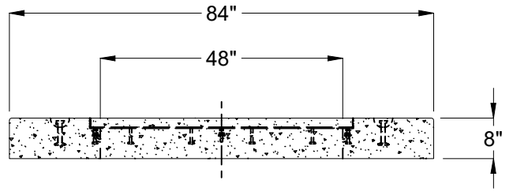

SECTION B-B

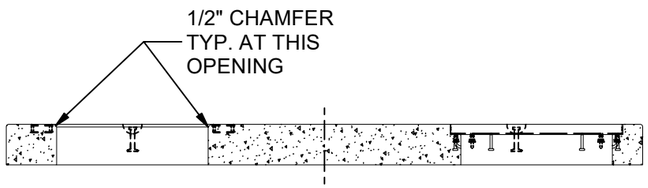

SECTION C-C

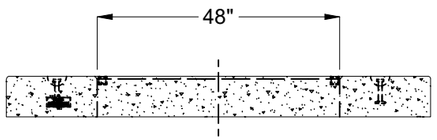

SECTION D-D

LIFTING NOTES
■ DEMOLDING: THIS CONCRETE PRODUCT IS DESIGNED TO BE LIFTED AT 2500 PSI WITH 4 LIFT CONNECTIONS EQUALLY LOADED TO 4 LIFTING POINTS AT A MINIMUM 60° SLING ANGLE, MEASURED FROM HORIZONTAL.
■ INSTALLATION: THIS CONCRETE PRODUCT IS DESIGNED TO BE LIFTED AT 5500 PSI WITH 4 LIFT CONNECTIONS EQUALLY LOADED TO 4 LIFTING POINTS AT A MINIMUM 60° SLING ANGLE, MEASURED FROM HORIZONTAL.

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
B-1	INITIAL RELEASE	12/1/2021	

BURY DEPTH:	0.0' - 0.3' to Top		
WATER LEVEL:	Below Structure	APPROX. WEIGHT:	5330.6 Lbs
DESIGN SPEC:	ASTM C857,ACI 318	LOADING SPEC:	A-03 (300 psf)
REINFORCEMENT TYPE:	Rebar	LIFTING TYPE:	Dogbone

JENSEN PRECAST EST. 1968

WWW.JENSENPRECAST.COM

©2021 Jensen Precast- All rights reserved.
All materials appearing as Jensen Precast documents and the like are proprietary work product and are protected under U.S. copyright and other laws.
Unless in conjunction with business conducted with Jensen Precast, any use of Jensen Precast work product without express, written consent is prohibited, and recipient is prohibited from distributing any and all work product to non-approved third parties under penalty of civil action.

DESCRIPTION:	Pad PD84126x8 EDISON CASTING LAYOUT		REV: B-1
PART NUMBER:	200057681	DRAWN BY:	C. Jeppson
CREATED:	8/2/2021	MODIFIED:	12/3/2021
			SHEET: 1 OF 1