

DESIGN NOTES
■ DESIGNED IN ACCORDANCE WITH AASHTO HS20-44 TRAFFIC BRIDGE LOADING USING 5,500 PSI COMPRESSIVE STRENGTH CONCRETE AND 60,000 PSI YIELD STRENGTH ASTM A-706 STEEL REINFORCEMENT PER CALCS. #31395.
■ ALL PARTS TO BE STENCILED: MFG DATE / JOB NUMBER / PRODUCT ID / WEIGHT.

BILL OF MATERIALS


ITEM	UNIT QTY	QTY	PART NUMBER	DESCRIPTION
1	3.018 ft^3	3.018 ft^3	100005993	CONCRETE 5500 PSI DRYCAST MIX
2	1	3	100002867	ANCHOR DOGBONE P52 2T X 3-3/8" GALV
3	1	1	100006704	FRAME 3660 CAST-IN GALV
4	1	8	100008114	INSERT THREADED METAL 1/2-13 UNC 1-1/2 IN OPEN
5	1	2	100002765	Insert Ferrule Loop 0.5 x 2.75" Zinc (F42 or Equiv.)
6	1	2	100002766	INSERT FERRULE LOOP 5/8 X 3-1/2 PLATED FX-5
7	1	1	100017934	REINFORCING MAT 100017934

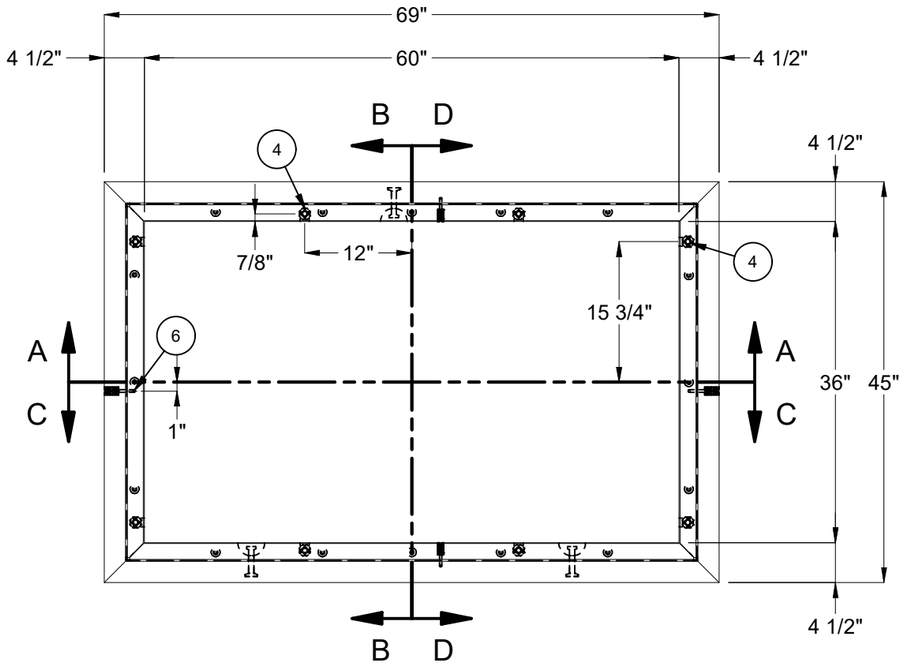


PLAN VIEW

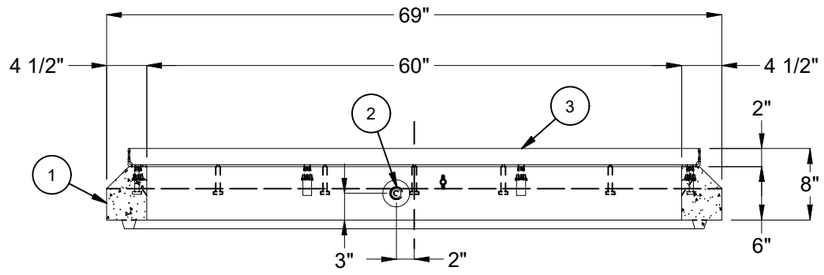


SECTION A-A

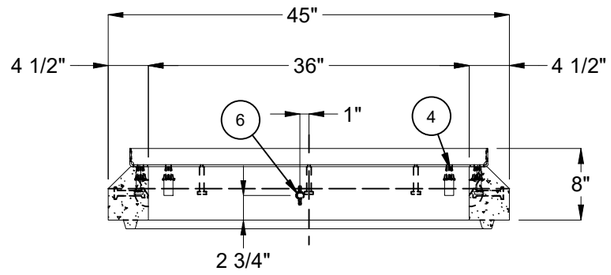

SECTION B-B

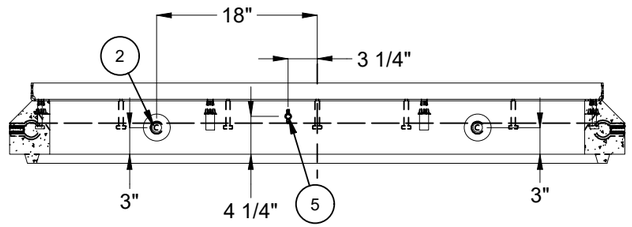

SECTION C-C

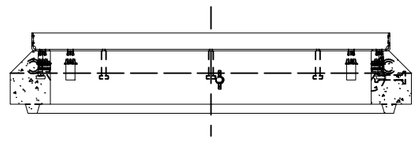



SECTION D-D

LIFTING NOTES
■ INSTALLATION: THIS CONCRETE PRODUCT IS DESIGNED TO BE LIFTED AT 5500 PSI WITH 3 LIFT CONNECTIONS EQUALLY LOADED TO 3 LIFTING POINTS AT A MINIMUM 60° SLING ANGLE, MEASURED FROM HORIZONTAL.
■ DEMOLDING: THIS CONCRETE PRODUCT IS DESIGNED TO BE LIFTED AT 2500 PSI WITH 2 LIFT CONNECTIONS EQUALLY LOADED TO 2 LIFTING POINTS AT A MINIMUM 90° SLING ANGLE, MEASURED FROM HORIZONTAL.
*All rigging shall be design by a qualified professional. Loading diagrams show illustrations of possible rigging setups to achieve the required sling angle and load leg equalization. Other valid rigging configurations are possible. A qualified professional must be consulted prior to lifting.

RIGGING DIAGRAMS*

INSTALLATION	A	DEMOLDING	G





REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
B-1	REVISED DESCRIPTION	4/5/2024	

BURY DEPTH:	0.0' - 0.0' to Top
WATER LEVEL:	3.0'
WEIGHT:	526.33 Lbs
DESIGN SPEC:	ACI 318,ASTM C857
LOADING SPEC:	A-16 (AASHTO HS20-44)
REINFORCEMENT TYPE:	Rebar
LIFTING TYPE:	Dogbone

JENSEN PRECAST EST. 1968

WWW.JENSENPRECAST.COM

©2024 Jensen Precast- All rights reserved.
All materials appearing as Jensen Precast documents and the like are proprietary work product and are protected under U.S. copyright and other laws.
Unless in conjunction with business conducted with Jensen Precast, any use of Jensen Precast work product without express, written consent is prohibited, and recipient is prohibited from distributing any and all work product to non-approved third parties under penalty of civil action.

DESCRIPTION:	Top Riser 3660x8 Cast-In Frame Edison CASTING LAYOUT	REV:	B-1
PART NUMBER:	100012206	DRAWN BY:	J. Prado
CREATED:	3/10/2020	MODIFIED:	4/5/2024
		SHEET:	1 OF 1

100012206.idw