NOTES
■ CONCRETE MIX USED IN POURING THIS PRODUCT SHALL USE FLY ASH AS AN ADMIXTURE.
■ ALL PARTS TO BE STENCILED: MFG DATE / JOB NUMBER / PRODUCT ID / WEIGHT.
■ EACH CONCRETE SECTION SHALL BE MARKED ON THE INSIDE & OUTSIDE WITH "JENSEN PRECAST" THE DESIGNATION "DWP/FA-CN" OR "DWP / F-CN-SC* IF SCC MIX USED AND THE DATE OF POUR.

BILL OF MATERIALS

ITEM	UNIT QTY	QTY	PART NUMBER	DESCRIPTION
1	4.727 ft^3	4.727 ft^3	100006028	CONCRETE 5500 PSI #17 SCC LADWP
2	1	8	100002867	ANCHOR DOGBONE P52 2T X 3-3/8" GALV
3	1	1	100008132	RFI PLASTIC TAG IDENCIA
4	1	1	100018029	REINFORCING MAT 100018029

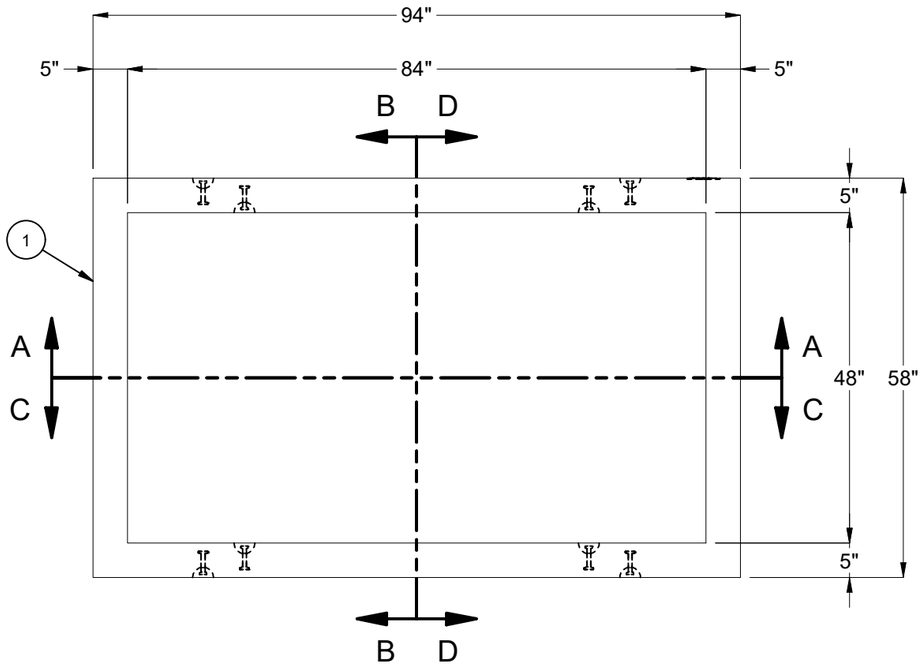

PLAN VIEW

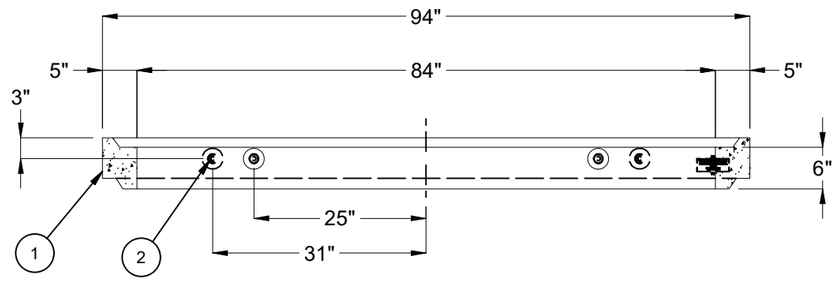

SECTION A-A

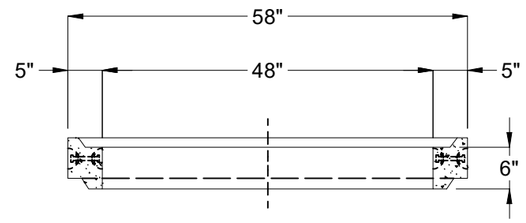

SECTION B-B



SECTION C-C



SECTION D-D

LIFTING NOTES
■ DEMOLDING: THIS CONCRETE PRODUCT IS DESIGNED TO BE LIFTED AT 2,500 PSI WITH 4 LIFT CONNECTIONS EQUALLY LOADED TO 4 LIFTING POINTS AT A MINIMUM 90° SLING ANGLE, MEASURED FROM HORIZONTAL.
■ INSTALLATION: THIS CONCRETE PRODUCT IS DESIGNED TO BE LIFTED AT 5,500 PSI WITH 4 LIFT CONNECTIONS EQUALLY LOADED TO 4 LIFTING POINTS AT A MINIMUM 60° SLING ANGLE, MEASURED FROM HORIZONTAL.

BURY DEPTH:	0.3' - 0.3' to Top		
WATER LEVEL:	3.0'	APPROX. WEIGHT:	713.47 Lbs
DESIGN SPEC:	ASTM C857,ACI 318	LOADING SPEC:	A-16 (AASHTO HS20-44)
REINFORCEMENT TYPE:	Rebar	LIFTING TYPE:	Dogbone

JENSEN PRECAST EST. 1968

WWW.JENSENPRECAST.COM

©2022 Jensen Precast- All rights reserved.
All materials appearing as Jensen Precast documents and the like are proprietary work product and are protected under U.S. copyright and other laws.
Unless in conjunction with business conducted with Jensen Precast, any use of Jensen Precast work product without express, written consent is prohibited, and recipient is prohibited from distributing any and all work product to non-approved third parties under penalty of civil action.

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
B-1	RELEASE IN INVENTOR	4/14/2022	

DESCRIPTION:	Riser 4884x6 Rect. Riser LADWP CASTING LAYOUT		REV: B-1
PART NUMBER:	100012309	DRAWN BY: S. Rodarte	SHEET: 1 OF 1
CREATED:	4/6/2022	MODIFIED: 4/14/2022	

100012309.idw