
NOTES
■ FOR COMPLETE DESIGN AND PRODUCT INFORMATION CONTACT JENSEN PRECAST.

BILL OF MATERIALS

ITEM	QTY	PART NUMBER	DESCRIPTION
1	3.954 ft^3	100011425	CONCRETE MIX GENERIC 5000 PSI
2	4	100003350	INS THRD FRL THNSLB STRUT FX-16 7/8IN ZINC
3	8	100012720	INSERT PLASTIC W/ BREAK OFF SNAP 0.5IN
4	2	100002523	CABLE RACK 8 HOLE GALV TABS
5	4	100013415	MACHINE BOLT 1/2-13 UNRC-2A 2IN HDG
6	4	100008814	WASHER FLAT 1/2 REGULAR TYPE A GALV
7	1	400003996	REINFORCING MAT 400003996

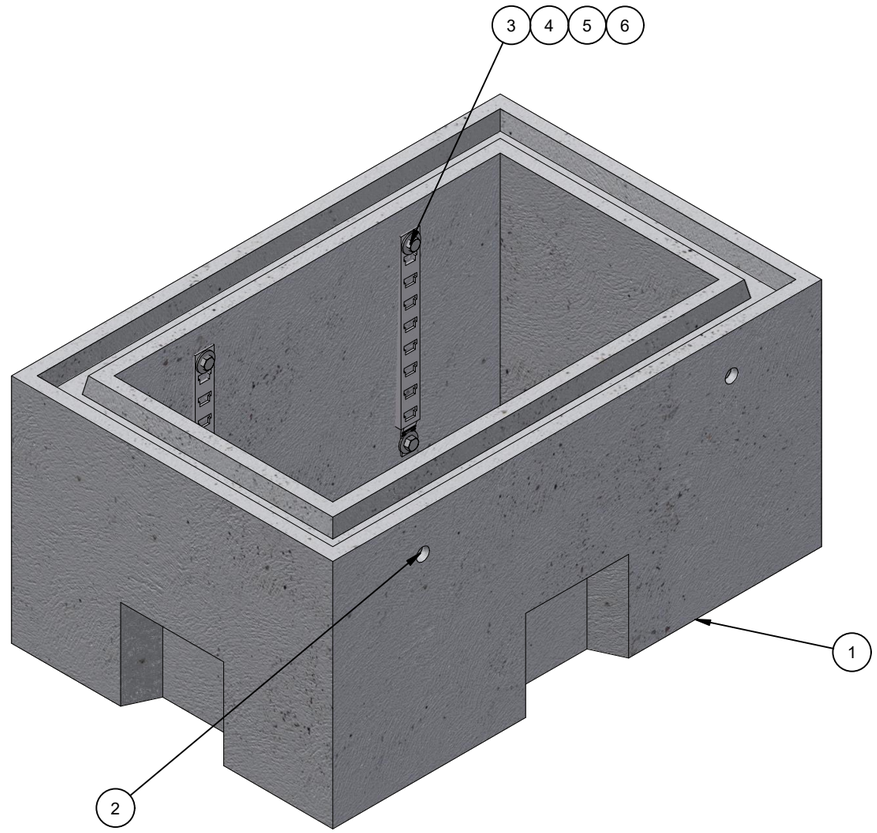

ISO LAYOUT

LIFTING NOTES
■ THIS CONCRETE PRODUCT IS DESIGNED TO BE LIFTED AT 3000PSI WITH 4 LIFT CONNECTIONS EQUALLY LOADED TO 2 LIFTING POINTS AT A MINIMUM 60° SLING ANGLE, MEASURED FROM HORIZONTAL.

BURY DEPTH:	0.5' - 1.0' to Top of Section		
WATER LEVEL:	3.5'	APPROX. WEIGHT:	599.55 Lbs
DESIGN SPEC:	ASTM C857,ACI 318	LOADING SPEC:	A-16 (AASHTO HS20-44)
REINFORCEMENT TYPE:	Rebar	LIFTING TYPE:	Insert


Infrastructure
JENSEN
WWW.JENSENINFRASTRUCTURE.COM

©2026 Jensen Infrastructure - All rights reserved.
All materials appearing as Jensen Infrastructure documents and the like are proprietary work product and are protected under U.S. copyright and other laws.
Unless in conjunction with business conducted with Jensen Infrastructure , any use of Jensen Infrastructure work product without express, written consent is prohibited, and recipient is prohibited from distributing any and all work product to non-approved third parties under penalty of civil action.
This product shall only be produced in a Jensen Infrastructure facility.


CHANGE HISTORY			
NO.	DESCRIPTION	DATE	BY
1	DRAWING CREATED	6/22/2020	MRV
2	UPDATED CONCRETE TEXTURE	3/6/2026	AMV

DESCRIPTION:	Splice Box 1730x18 Rect. Riser Knockout AT&T CASTING LAYOUT		REV: A-1
PART NUMBER:	100001008	DRAWN BY: A. Viveiros	SHEET: 1 OF 2
CREATED:	6/22/2020	MODIFIED: 3/6/2026	

100001008.idw

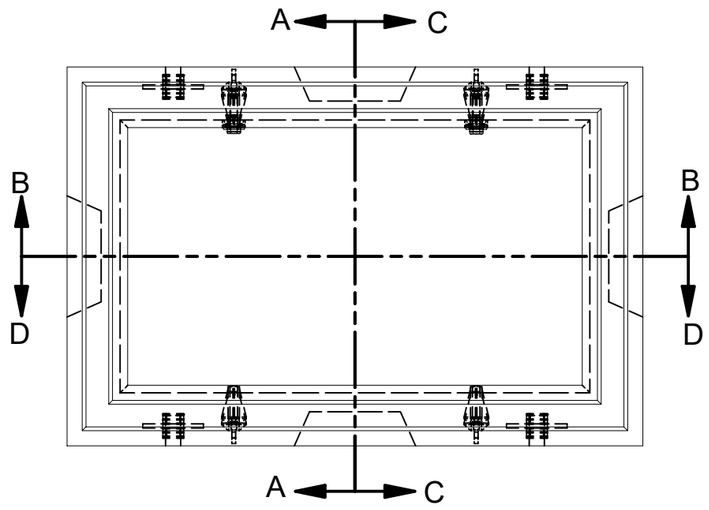


PLAN VIEW

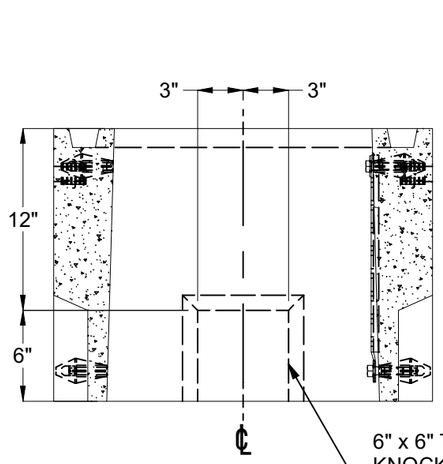


SECTION A-A


6" x 6" THINWALL KNOCKOUTS EXTERIOR WALLS 4 TOTAL

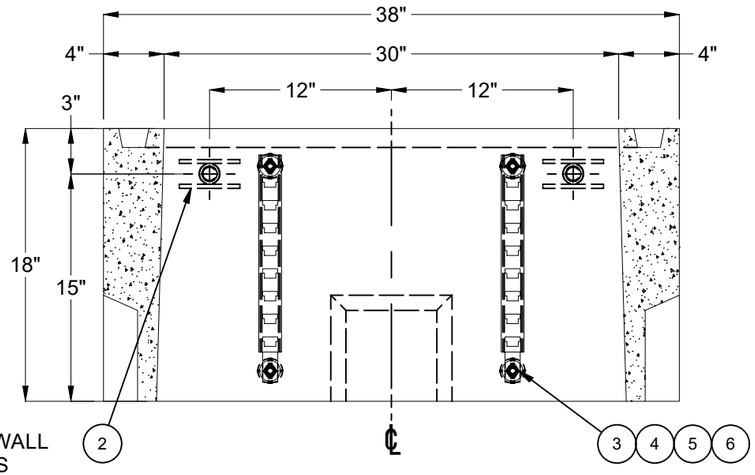

SECTION B-B

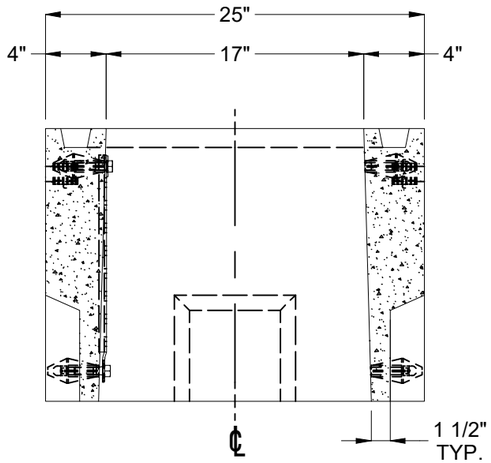

SECTION C-C

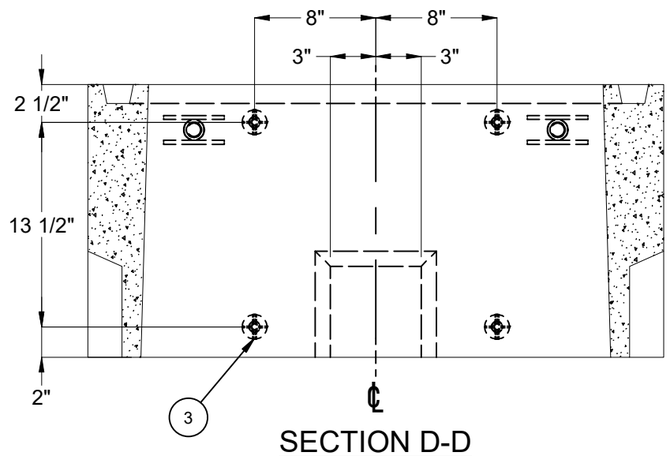

SECTION D-D

BURY DEPTH:	0.5' - 1.0' to Top of Section		
WATER LEVEL:	3.5'	APPROX. WEIGHT:	599.55 Lbs
DESIGN SPEC:	ASTM C857,ACI 318	LOADING SPEC:	A-16 (AASHTO HS20-44)
REINFORCEMENT TYPE:	Rebar	LIFTING TYPE:	Insert

Infrastructure
JENSEN
WWW.JENSENINFRASTRUCTURE.COM

©2026 Jensen Infrastructure - All rights reserved.
All materials appearing as Jensen Infrastructure documents and the like are proprietary work product and are protected under U.S. copyright and other laws.
Unless in conjunction with business conducted with Jensen Infrastructure , any use of Jensen Infrastructure work product without express, written consent is prohibited, and recipient is prohibited from distributing any and all work product to non-approved third parties under penalty of civil action.
This product shall only be produced in a Jensen Infrastructure facility.

DESCRIPTION:	Splice Box 1730x18 Rect. Riser Knockout AT&T CASTING DRAWING		REV: A-1
PART NUMBER:	100001008	DRAWN BY:	A. Viveiros
CREATED:	6/22/2020	MODIFIED:	3/6/2026
			SHEET: 2 OF 2

100001008.idw