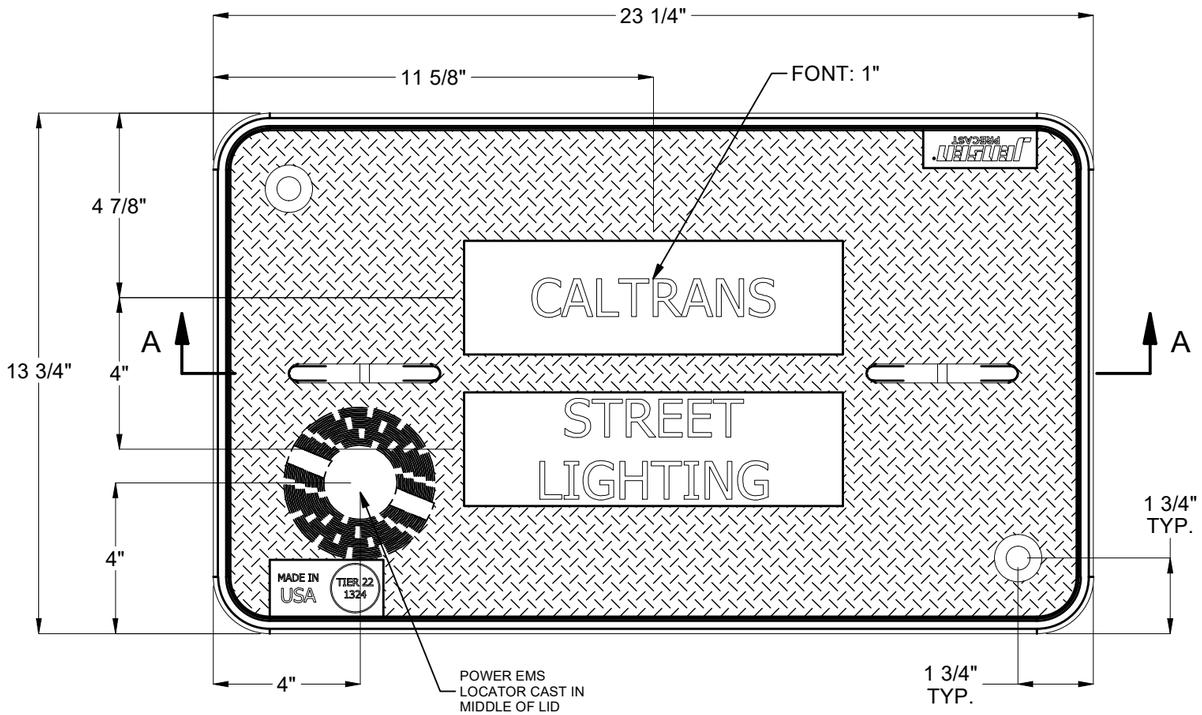

BILL OF MATERIALS

ITEM	UNIT QTY	QTY	PART NUMBER	DESCRIPTION
1	0.349 ft^3	0.349 ft^3	100035039	CONCRETE COMPOSITE LID MIX BRUCE
2	0.333 ft	0.667 ft	100008155	REINF ROD SMOOTH PENCIL #2 1/4 SS
3	1	1	100008850	EMS LOCATOR 1412-XRV VAULT MARKER - POWER
4	0.847 lbmass	1.694 lbmass	100008157	Combo Mat Fiber Reinforcing 24 Oz

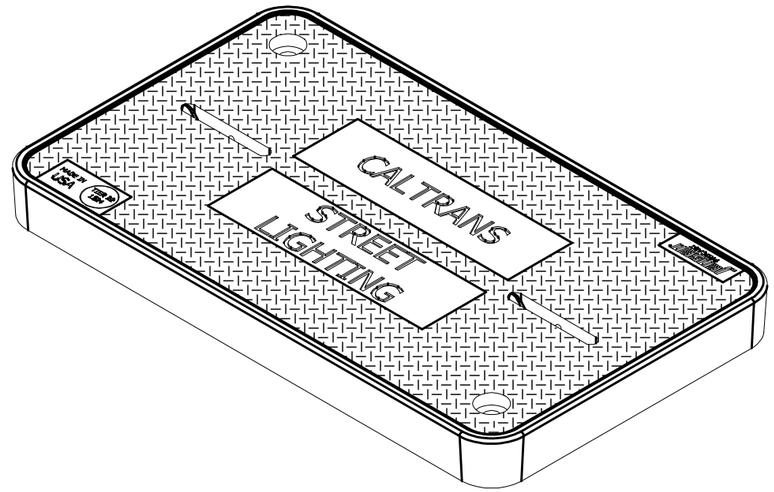

100013490.idw

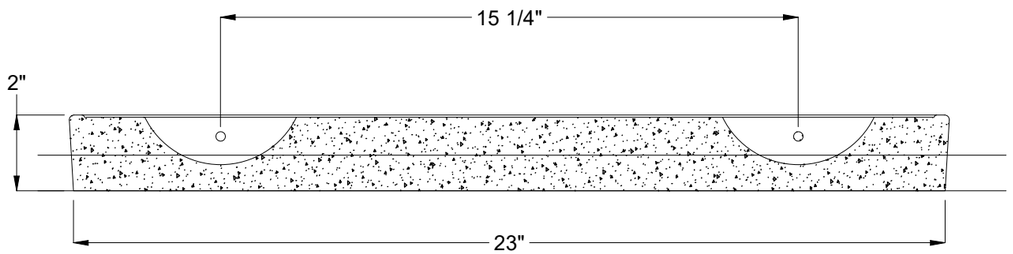

SECTION A-A

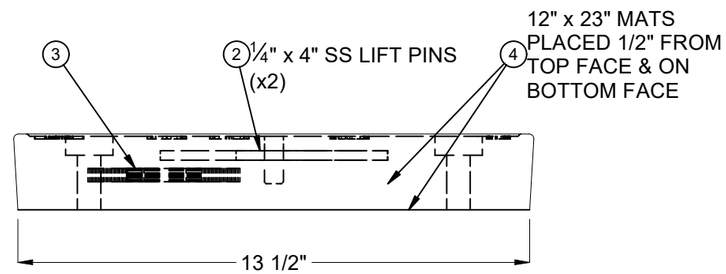

REVISION HISTORY			
REV	DESCRIPTION	DATE	BY
A	INITIAL RELEASE	9/8/2020	BGD

DESIGN SPEC: ANSI/SCTE-77	APPROX. WEIGHT: 43.67 lbs		
AGENCY: CALTRANS	DESIGN/TEST LOAD: 22.5/33.75 kip		
AGENCY SPEC:	LOADING SPEC: Tier-22		

JENSEN PRECAST EST. 1968

©2022 Jensen Precast- All rights reserved.
Unless expressly authorized by Jensen Precast any use or duplication is strictly prohibited under penalty of civil action or codes.

DESCRIPTION: HPC 1324 Polymer Cover, Tier-22, Bolt Down, Power EMS, CALTRANS STREET LIGHTING

REV: B-4

PART #:	100013490	DRAWN BY:	D. Morgan
CREATED:	2/19/2019	MODIFIED:	9/23/2022

SHEET: 1 OF 1