


## BILL OF MATERIALS


| ITEM | UNIT QTY | QTY | PART NUMBER | DESCRIPTION |
|---|---|---|---|---|
| 1 | 0.588 ft^3 | 0.588 ft^3 | 100035039 | CONCRETE COMPOSITE LID MIX BRUCE |
| 2 | 0.333 ft | 0.667 ft | 100008155 | REINF ROD SMOOTH PENCIL #2 1/4 SS |
| 3 | 1 | 1 | 100008850 | EMS LOCATOR 1412-XRV VAULT MARKER - POWER |
| 4 | 0.847 lbmass | 1.694 lbmass | 100008157 | Combo Mat Fiber Reinforcing 24 Oz |

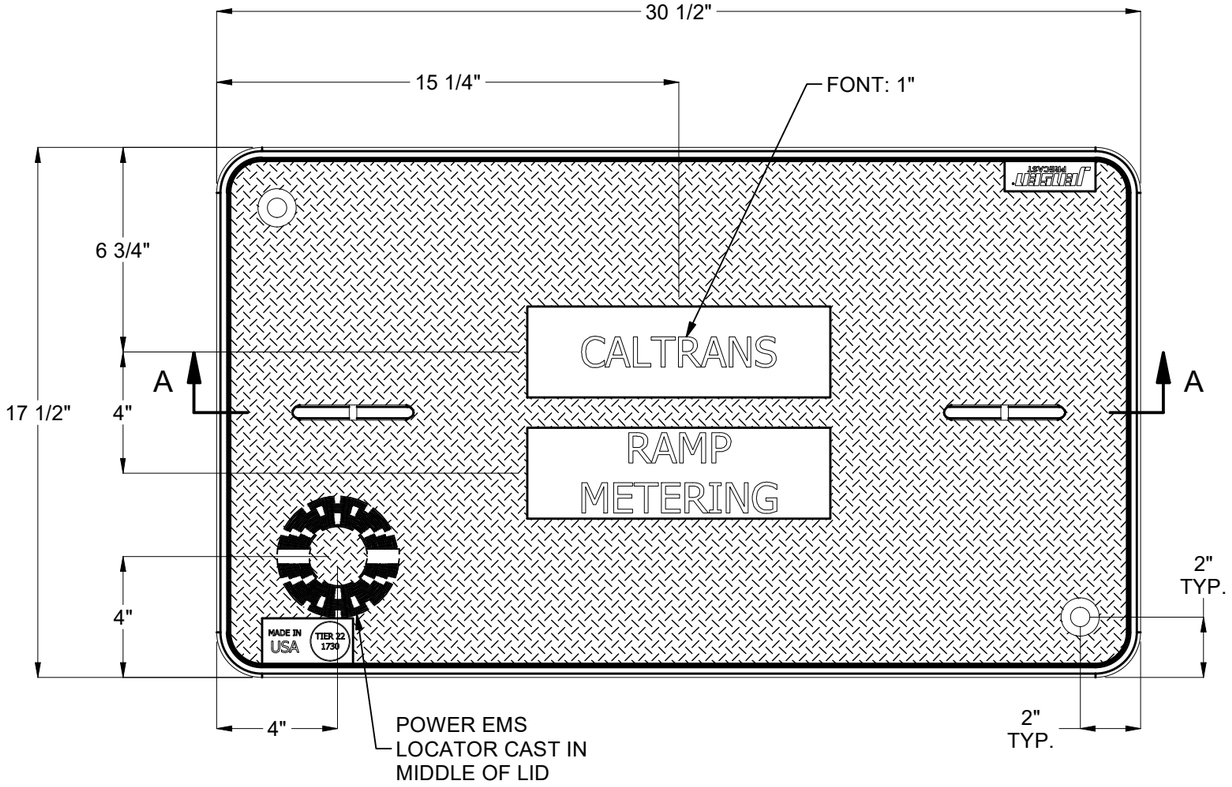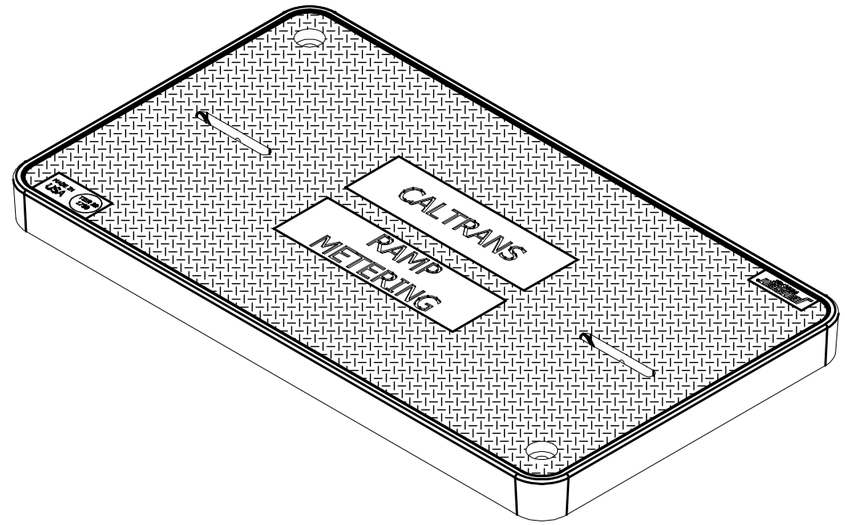


SECTION A-A

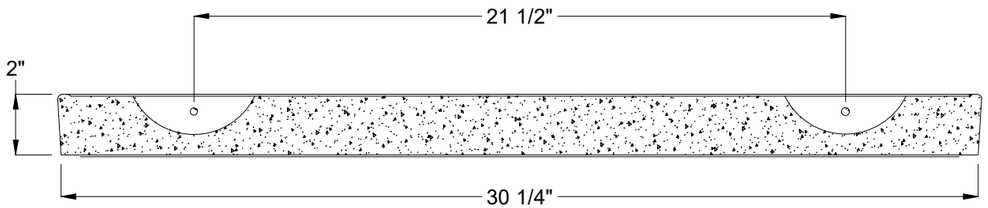


| REVISION HISTORY | | | |
|---|---|---|---|
| REV | DESCRIPTION | DATE | BY |
| A | INITIAL RELEASE | 3/30/22 | DJM |
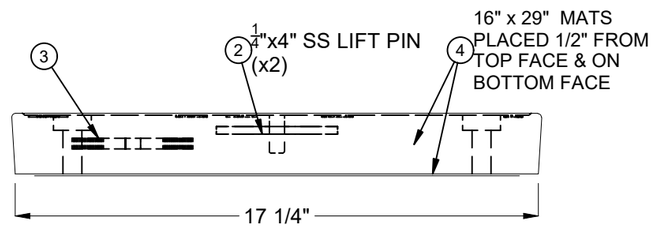
| | | | |
|---|---|---|---|
| DESIGN SPEC: ANSI/SCTE-77 | APPROX. WEIGHT: 72.81 lbs | | |
| AGENCY: CALTRANS | DESIGN/TEST LOAD: 22.5/33.75 kip | | |
| AGENCY SPEC: | LOADING SPEC: Tier-22 | | |

JENSEN PRECAST EST. 1968

©2022 Jensen Precast- All rights reserved.
Unless expressly authorized by Jensen Precast any use or duplication is strictly prohibited under penalty of civil action or codes.

DESCRIPTION: HPC 1730 Polymer Cover, Tier-22, Bolt Down, Power EMS, CALTRANS RAMP METERING

REV: B-2

| | | | |
|---|---|---|---|
| PART #: | 100022183 | DRAWN BY: | D. Morgan |
| CREATED: | 2/19/2019 | MODIFIED: | 9/21/2022 |

SHEET: 1 OF 1

100022183.idw