NOTES
■ FOR COMPLETE DESIGN AND PRODUCT INFORMATION CONTACT JENSEN PRECAST.

BILL OF MATERIALS

ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	100008684	Small Box PB 3048x6 Box Cast-In Frame
2	1	200060406	DAS2-MD-3048-D5-TRX-G-SAC-PG&E
3	4	100002584	PENTA COIL BOLT 1/2 x 1-1/2 SS
4	4	100022230	DISC-LOCK WASHER 1/2 SS GLUED

100008607.idw

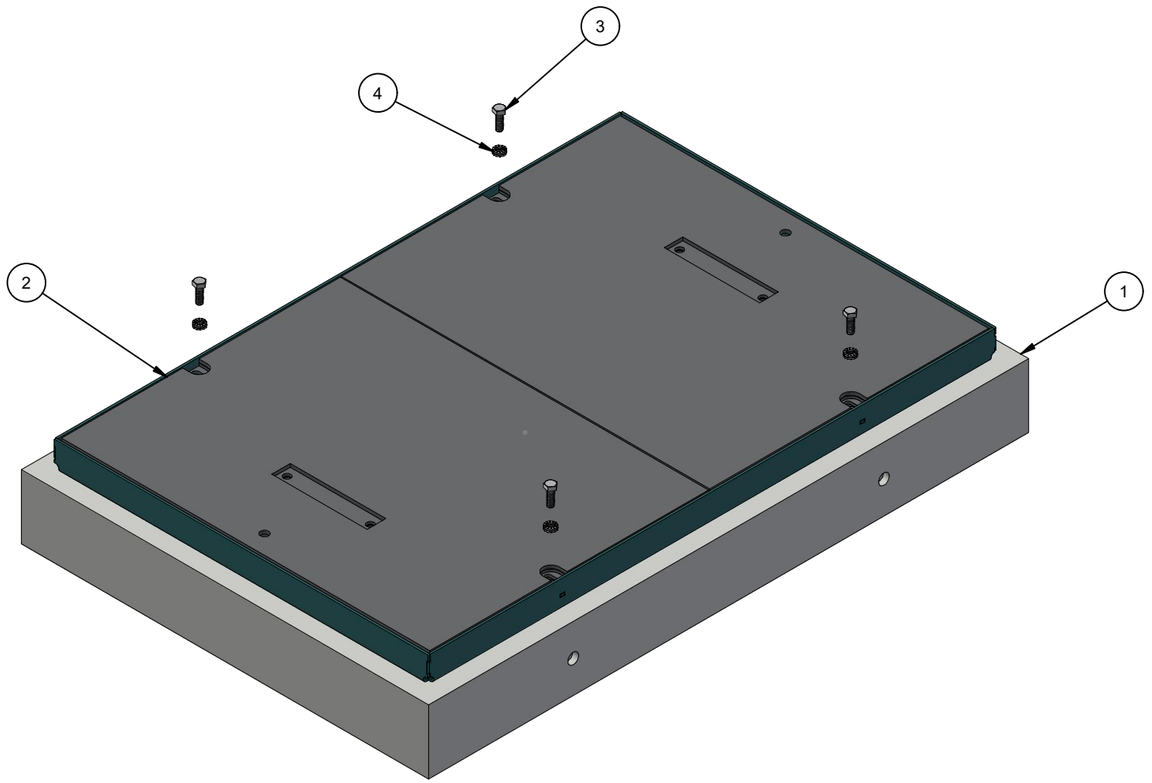

ISO LAYOUT

LIFTING NOTES
■ THIS CONCRETE PRODUCT IS DESIGNED TO BE LIFTED AT 2500PSI WITH 4 LIFT CONNECTIONS EQUALLY LOADED TO 2 LIFTING POINTS AT A MINIMUM 60° SLING ANGLE, MEASURED FROM HORIZONTAL.

BURY DEPTH:	0.0' - 0.3' to Top		
WATER LEVEL:	2.0'	APPROX. WEIGHT:	668.52 Lbs
DESIGN SPEC:	ASTM C857,ACI 318	LOADING SPEC:	A-16 (AASHTO HS20-44)
REINFORCEMENT TYPE:	Rebar	LIFTING TYPE:	Insert

JENSEN PRECAST EST. 1968

WWW.JENSENPRECAST.COM

©2022 Jensen Precast- All rights reserved.
All materials appearing as Jensen Precast documents and the like are proprietary work product and are protected under U.S. copyright and other laws.
Unless in conjunction with business conducted with Jensen Precast, any use of Jensen Precast work product without express, written consent is prohibited, and recipient is prohibited from distributing any and all work product to non-approved third parties under penalty of civil action.

CHANGE HISTORY

NO.	DESCRIPTION	DATE	BY
1	DRAWING CREATED	12/7/2020	MRV
2			
3			

DESCRIPTION: Small Box PB 3048x6 Box Cast-In Frame and Cover

CASTING LAYOUT

REV: A-4

SHEET: 1 OF 1

PART NUMBER:	100008607	DRAWN BY:	A. Sprung
CREATED:	12/7/2020	MODIFIED:	7/29/2022