NOTES
■ ALL PARTS TO BE STENCILED: MFG DATE / JOB NUMBER / PRODUCT ID / WEIGHT.

BILL OF MATERIALS

ITEM	UNIT QTY	QTY	PART NUMBER	DESCRIPTION
1	10.818 ft^3	10.818 ft^3	100024079	CONCRETE #19 MOD SCC
2	1	1	100008132	RFI PLASTIC TAG IDENCIA
3	1	8	100002874	ANCHOR DOGBONE P52 4T X 4-3/4" GALV
4	1	1	100017907	REINFORCING MAT 100017907

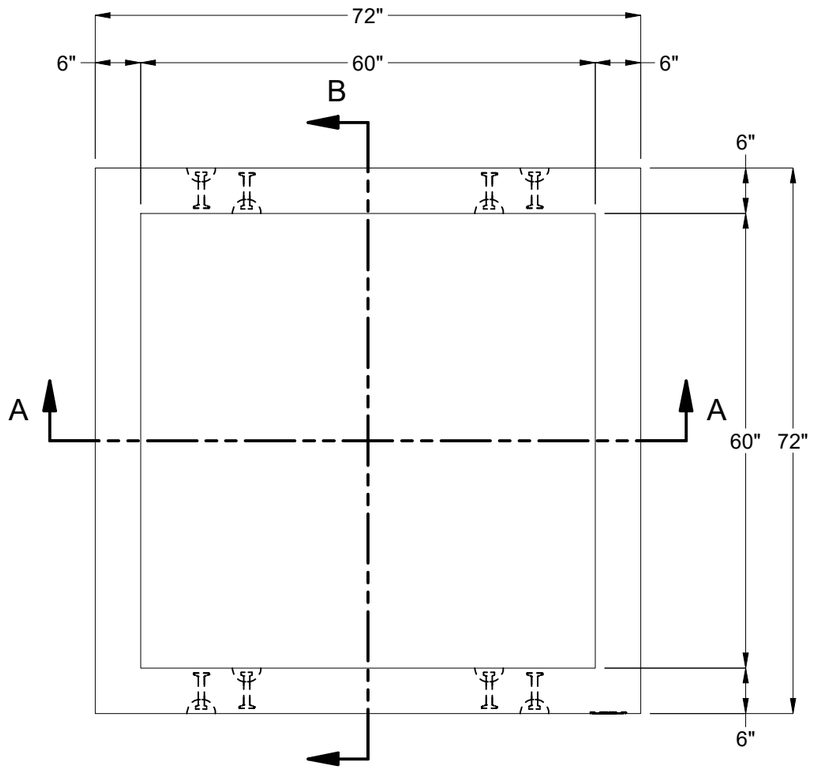

PLAN VIEW

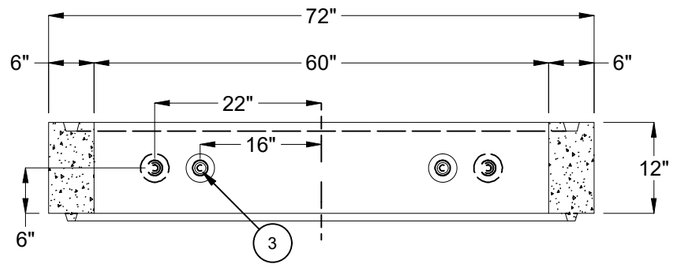

SECTION A-A

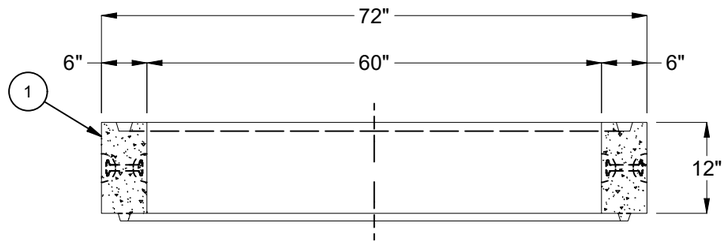

SECTION B-B

LIFTING NOTES
■ DEMOLDING: THIS CONCRETE PRODUCT IS DESIGNED TO BE LIFTED AT 2,500 PSI WITH 4 LIFT CONNECTIONS EQUALLY LOADED TO 4 LIFTING POINTS AT A MINIMUM 90° SLING ANGLE, MEASURED FROM HORIZONTAL.
■ INSTALLATION: THIS CONCRETE PRODUCT IS DESIGNED TO BE LIFTED AT 5,500 PSI WITH 4 LIFT CONNECTIONS EQUALLY LOADED TO 4 LIFTING POINTS AT A MINIMUM 60° SLING ANGLE, MEASURED FROM HORIZONTAL.

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
B-4	INVENTOR DRAWING CREATED	3/19/2021	

BURY DEPTH:	1.5' - 1.5' to Top		
WATER LEVEL:	3.0'	APPROX. WEIGHT:	1634.06 Lbs
DESIGN SPEC:	ASTM C857,ACI 318	LOADING SPEC:	A-16 (AASHTO HS20-44)
REINFORCEMENT TYPE:	Rebar	LIFTING TYPE:	Dogbone

JENSEN PRECAST EST. 1968

WWW.JENSENPRECAST.COM

©2021 Jensen Precast- All rights reserved.
All materials appearing as Jensen Precast documents and the like are proprietary work product and are protected under U.S. copyright and other laws.
Unless in conjunction with business conducted with Jensen Precast, any use of Jensen Precast work product without express, written consent is prohibited, and recipient is prohibited from distributing any and all work product to non-approved third parties under penalty of civil action.

DESCRIPTION:	Riser 6060x12 Rect. Riser CASTING LAYOUT		REV: B-4
PART NUMBER:	100012179	DRAWN BY:	M. Zaragoza
CREATED:	3/19/2021	MODIFIED:	5/4/2021
			SHEET: 1 OF 1

100012179.idw