
NOTES
■ FOR COMPLETE DESIGN AND PRODUCT INFORMATION CONTACT JENSEN PRECAST.

BILL OF MATERIALS

ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	300151085	REINFORCING MAT 300151085
2	23.791 ft^3	100011425	CONCRETE MIX GENERIC 5000 PSI
3	4	100002854	INSERT MH RUNG PLASTIC SP SOCKET
4	4	200038982	#3 HAIR PIN

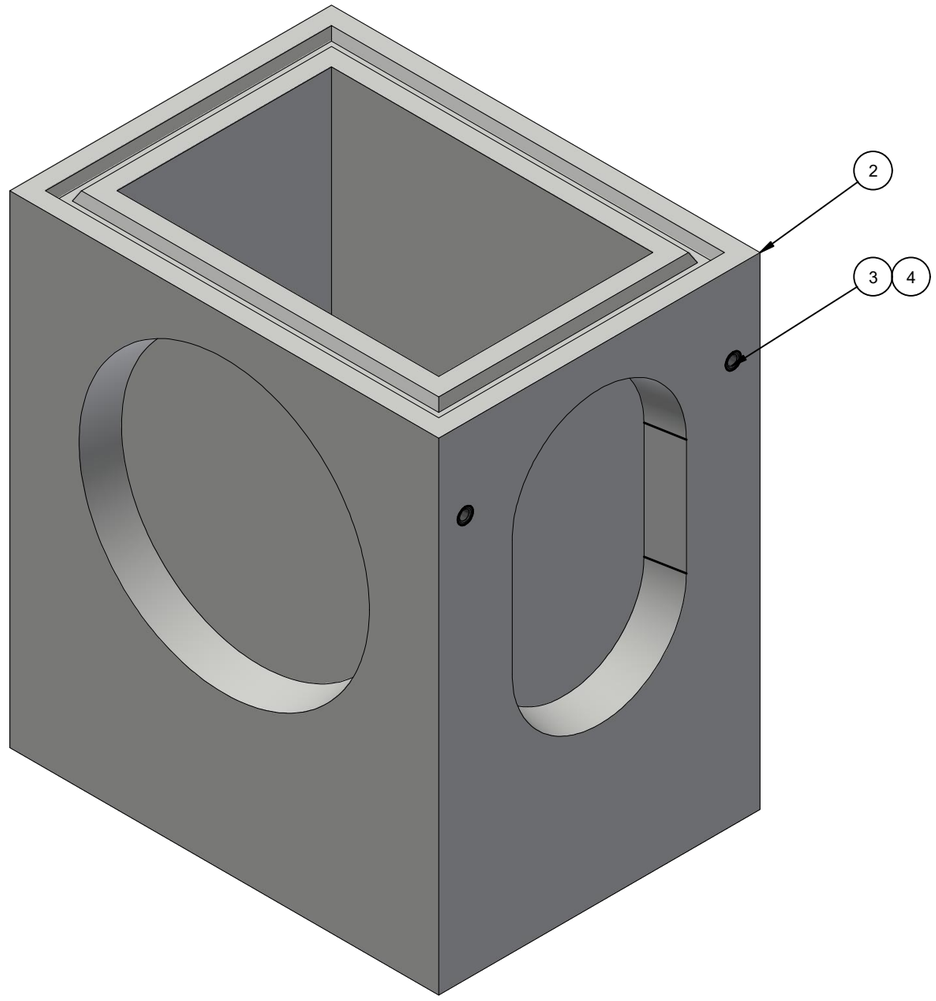

ISO LAYOUT

200067640.idw

LIFTING NOTES
■ PLANT DEMOLDING & FIELD INSTALLATION: MINIMUM HANDLING CONCRETE STRENGTH F'c = 3000 PSI RIGGING EQUALIZER REQUIRED TO EQUALIZE LOAD TO 2 LIFTING POINTS WITH A 60 DEGREE SLING ANGLE

CHANGE HISTORY			
NO.	DESCRIPTION	DATE	BY
1	DRAWING CREATED	08/16/2022	EDC
2			
3			


BURY DEPTH:	0.0' - 3.8' to Top		
WATER LEVEL:	5.0'	APPROX. WEIGHT:	3575.7 Lbs
DESIGN SPEC:	ASTM C890,ACI 318	LOADING SPEC:	A-16 (AASHTO HS20-44)
REINFORCEMENT TYPE:	Rebar	LIFTING TYPE:	SP Socket

JENSEN PRECAST EST. 1968


WWW.JENSENPRECAST.COM

©2022 Jensen Precast- All rights reserved.
All materials appearing as Jensen Precast documents and the like are proprietary work product and are protected under U.S. copyright and other laws.
Unless in conjunction with business conducted with Jensen Precast, any use of Jensen Precast work product without express, written consent is prohibited, and recipient is prohibited from distributing any and all work product to non-approved third parties under penalty of civil action.


DESCRIPTION:	Drainage 2436x48 Rect. Bottom Section Knockout 12" Sump CASTING LAYOUT		REV: A-4
PART NUMBER:	200067640	DRAWN BY:	E CAMERON
CREATED:	8/15/2022	MODIFIED:	8/29/2022
			SHEET: 1 OF 2

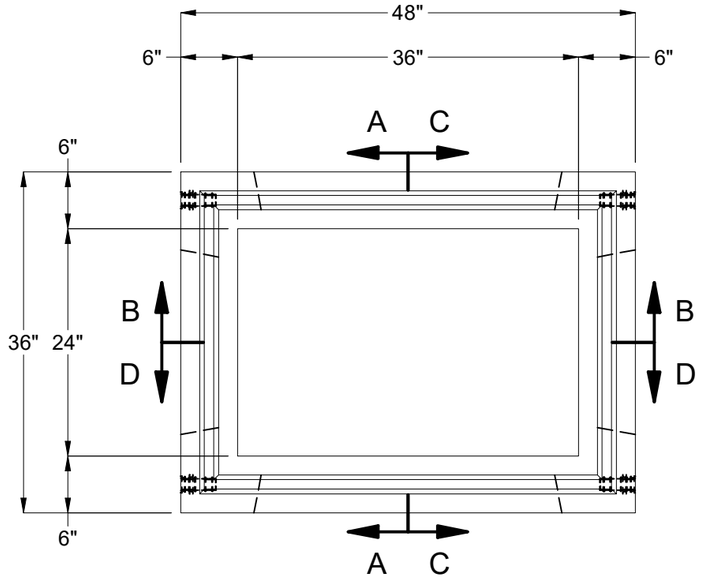


PLAN VIEW

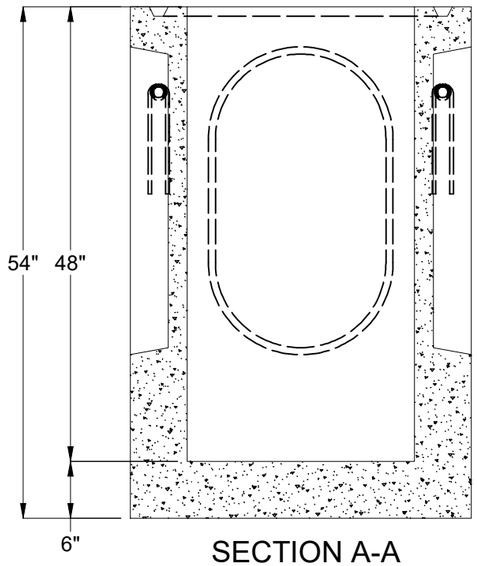


SECTION A-A

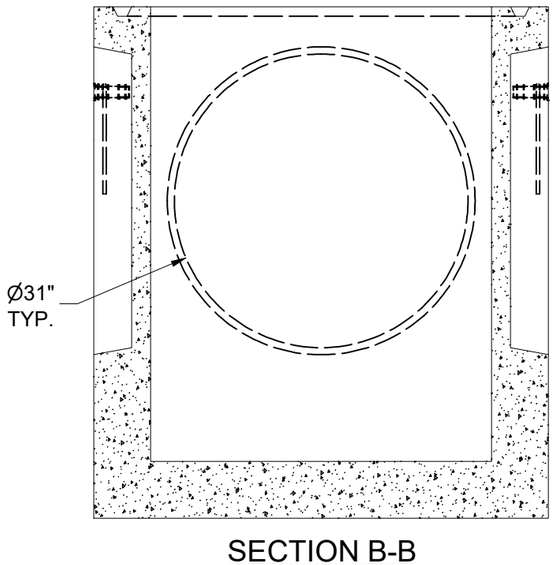

SECTION B-B

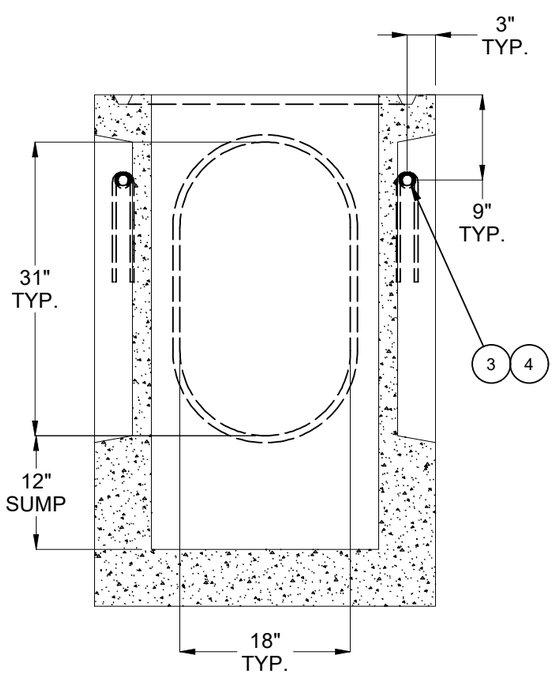

SECTION C-C

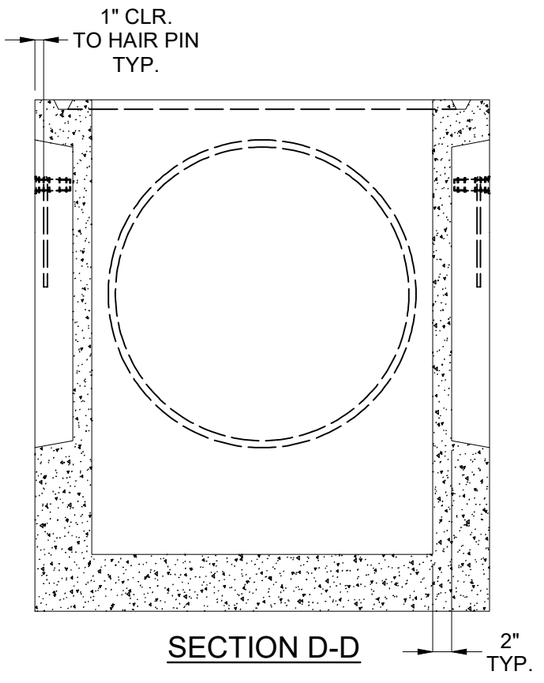

SECTION D-D

BURY DEPTH:	0.0' - 3.8' to Top		
WATER LEVEL:	5.0'	APPROX. WEIGHT:	3575.7 Lbs
DESIGN SPEC:	ASTM C890,ACI 318	LOADING SPEC:	A-16 (AASHTO HS20-44)
REINFORCEMENT TYPE:	Rebar	LIFTING TYPE:	SP Socket

JENSEN PRECAST EST. 1968

WWW.JENSENPRECAST.COM

©2022 Jensen Precast- All rights reserved.
All materials appearing as Jensen Precast documents and the like are proprietary work product and are protected under U.S. copyright and other laws.
Unless in conjunction with business conducted with Jensen Precast, any use of Jensen Precast work product without express, written consent is prohibited, and recipient is prohibited from distributing any and all work product to non-approved third parties under penalty of civil action.

DESCRIPTION:	Drainage 2436x48 Rect. Bottom Section Knockout 12" Sump CASTING DRAWING		REV: A-4
PART NUMBER:	200067640	DRAWN BY:	E CAMERON
CREATED:	8/15/2022	MODIFIED:	8/29/2022
			SHEET: 2 OF 2

200067640.idw