NOTES
■ FOR COMPLETE DESIGN AND PRODUCT INFORMATION CONTACT JENSEN PRECAST.

BILL OF MATERIALS

ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	200070269	Vault 72144x60 Rect. Bottom Section Core Drill Sump
2	11.000 gal	100042909	COATING WATERPROOFING BG2000 MULTICOAT

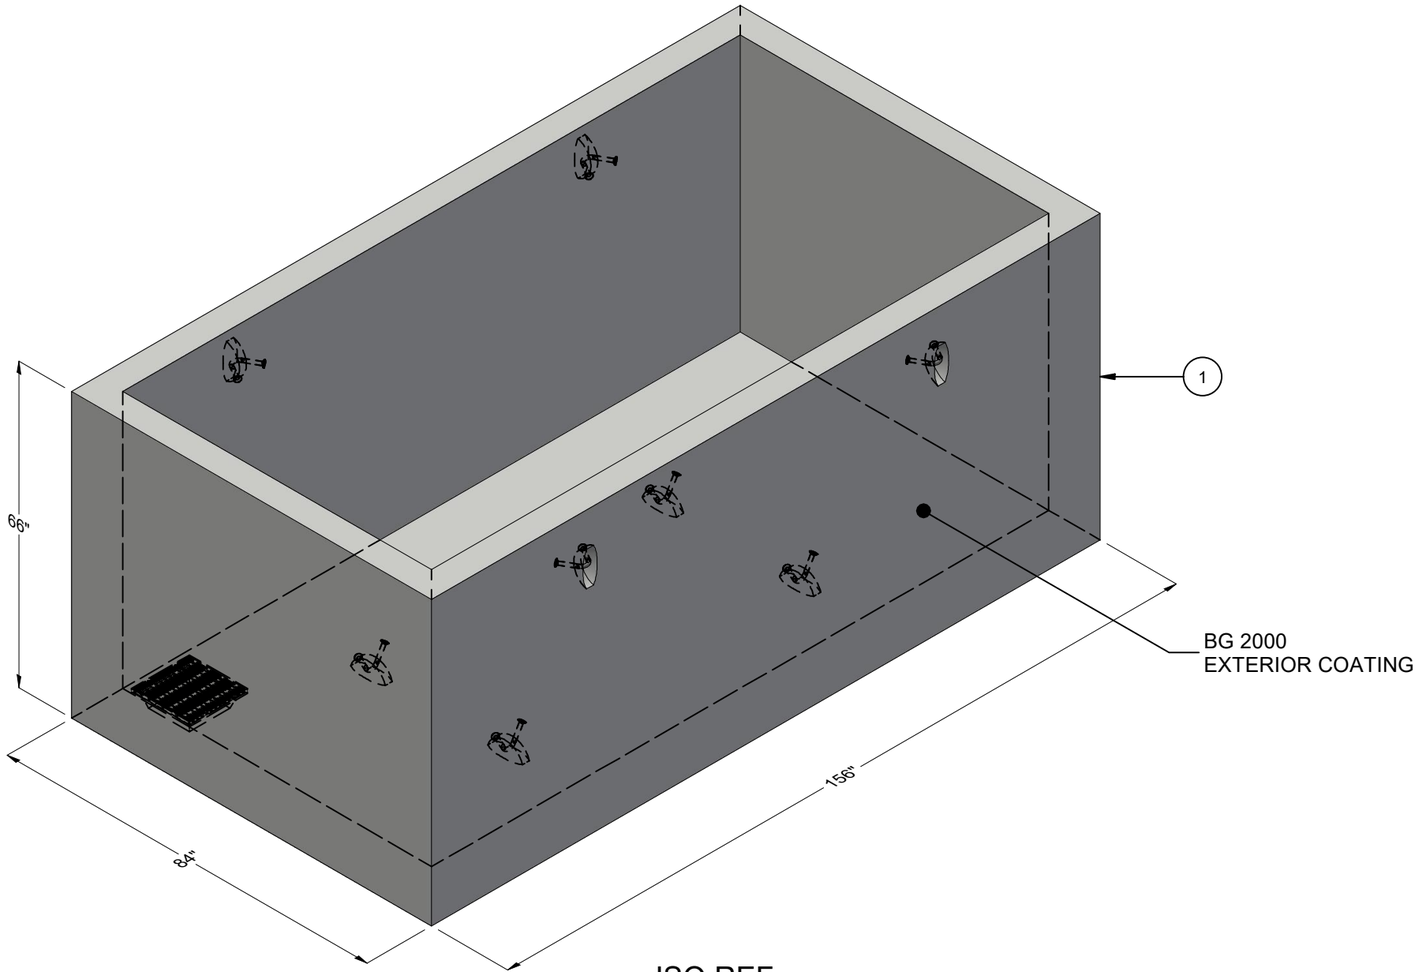

ISO REF

LIFTING NOTES
■ DEMOLDING: THIS CONCRETE PRODUCT IS DESIGNED TO BE LIFTED AT 2500 PSI WITH 4 LIFT CONNECTIONS EQUALLY LOADED TO 4 LIFTING POINTS AT A MINIMUM 60° SLING ANGLE, MEASURED FROM HORIZONTAL.
■ FIELD INSTALLATION: THIS CONCRETE PRODUCT IS DESIGNED TO BE LIFTED AT 2500 PSI WITH 4 LIFT CONNECTIONS EQUALLY LOADED TO 4 LIFTING POINTS AT 90° SLING ANGLE, MEASURED FROM HORIZONTAL.

CHANGE HISTORY			
REV	DESCRIPTION	DATE	BY
A	CREATED TO CAPTURE BG2000	8/21/2023	EDC
B			
C			

BURY DEPTH:	0.0' - 4.0' to Top		
WATER LEVEL:	Below Structure	WEIGHT:	21048.45 Lbs
DESIGN SPEC:	ACI 318,ASTM C857,ASTM C890	LOADING SPEC:	A-16 (AASHTO HS20-44)
REINFORCEMENT TYPE:	Rebar	LIFTING TYPE:	A-Anchor

JENSEN PRECAST EST. 1968

WWW.JENSENPRECAST.COM

©2023 Jensen Precast- All rights reserved.
All materials appearing as Jensen Precast documents and the like are proprietary work product and are protected under U.S. copyright and other laws.
Unless in conjunction with business conducted with Jensen Precast, any use of Jensen Precast work product without express, written consent is prohibited, and recipient is prohibited from distributing any and all work product to non-approved third parties under penalty of civil action.

DESCRIPTION:	Vault 72144x60 Rect. Bottom Section Core Drill Sump Ext. Coating - Multicoat BG2000 CASTING LAYOUT - SQUARE SUMP		REV: A-2
PART NUMBER:	200078995	DRAWN BY:	E CAMERON
CREATED:	8/14/2023	MODIFIED:	8/21/2023
			SHEET: 1 OF 1

200078995.idw