
DESIGN NOTES
■ FOR COMPLETE DESIGN AND PRODUCT INFORMATION CONTACT JENSEN PRECAST.

BILL OF MATERIALS

ITEM	QTY	PART NUMBER	DESCRIPTION	MASS (lbs)
1	1	400001334	Vault 72144x12 Slab Top 49"x79"C	9386.88
2	4.000 gal	100042909	COATING WATERPROOFING BG2000 MULTICOAT	.00

200079004.idw

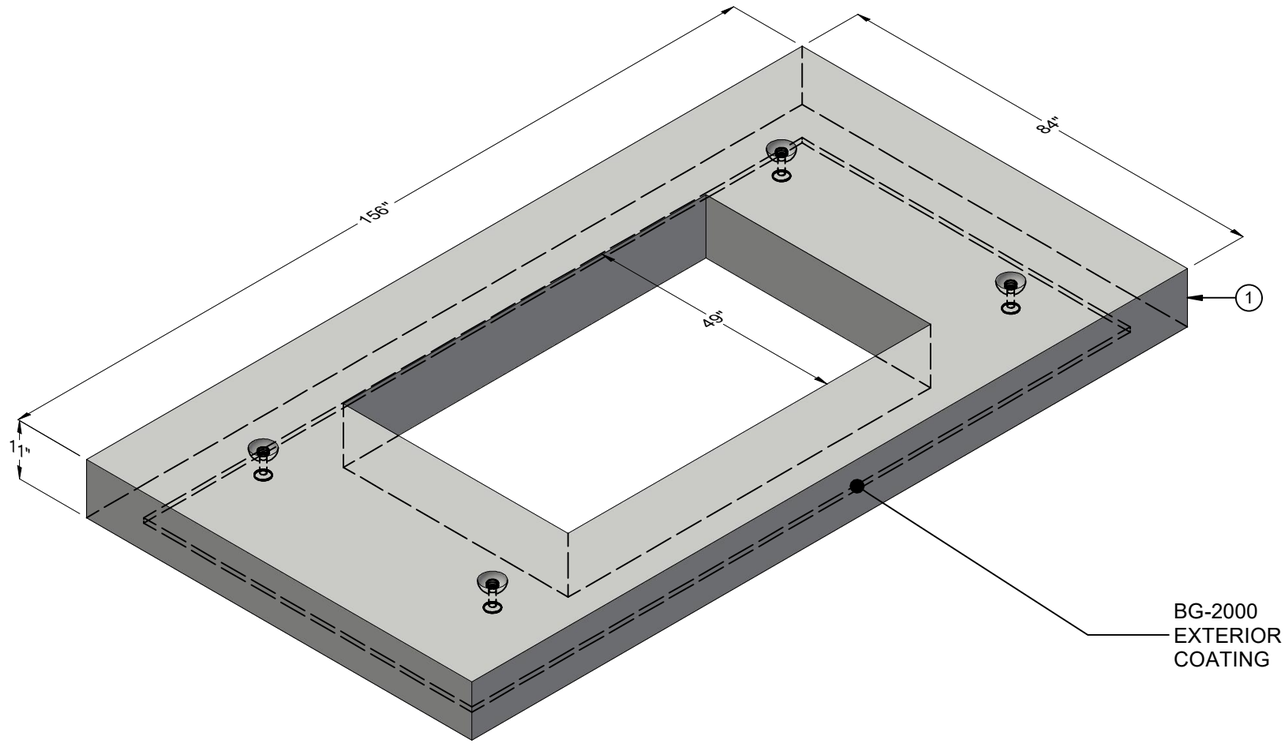

ISO LAYOUT

LIFTING NOTES
■ PLANT DEMOLDING AND FIELD INSTALLATION: MINIMUM HANDLING CONCRETE STRENGTH F'c = 2500 PSI RIGGING EQUALIZER REQUIRED TO EQUALIZE LOAD TO 2 LIFTING POINTS WITH A SLING ANGLE BETWEEN 65° AND 90°

REVISION HISTORY			
REV	DESCRIPTION	DATE	BY
A	CREATED FOR SPARKS TO CAPTURE BG2000	8/21/2023	EDC
B			
C			

BURY DEPTH:	0.0' - 1.2' to Top		
WATER LEVEL:	Below Structure	WEIGHT:	9386.88 Lbs
DESIGN SPEC:	ACI 318,ASTM C890	LOADING SPEC:	A-16 (AASHTO HS20-44)
REINFORCEMENT TYPE:	Rebar	LIFTING TYPE:	Dogbone

JENSEN PRECAST EST. 1968

WWW.JENSENPRECAST.COM

©2023 Jensen Precast- All rights reserved.
All materials appearing as Jensen Precast documents and the like are proprietary work product and are protected under U.S. copyright and other laws.
Unless in conjunction with business conducted with Jensen Precast, any use of Jensen Precast work product without express, written consent is prohibited, and recipient is prohibited from distributing any and all work product to non-approved third parties under penalty of civil action.

DESCRIPTION:	Vault 72144x12 Slab Top 49"x79"C Ext. Coating - Multicoat BG2000 CASTING LAYOUT		REV: A-2
PART NUMBER:	200079004	DRAWN BY:	E CAMERON
CREATED:	9/13/2019	MODIFIED:	8/21/2023
			SHEET: 1 OF 1